


ProLume

Electronic Linear Fluorescent Ballast Specifications

Ballast Type: Electronic Fluorescent
 Starting Method: Rapid Start
 Lamp Connection: Parallel
 Input Voltage: 120V
 Input Frequency: 50/60Hz

Lamp Type	# of Lamps	Volts	Rated Lamp Watts	Min. Start Temp (°F/°C)	Input Current (Amps)	Input Power (Watts)	Ballast Factor	THD %	Power Factor	B. E. F.	Wire Diag.
F20T12	2	120	20	0/-18	0.50	34	0.88	<130	0.57	2.59	2-20
F20T8	2	120	20	0/-18	0.50	34	0.88	<130	0.57	2.59	2-20
F18T8 24"	2	120	18	0/-18	0.49	34	0.94	<130	0.57	2.76	2-20
F17T8	2	120	17	0/-18	0.52	36	1.00	<130	0.58	2.78	2-20
F15T12	2	120	15	0/-18	0.46	31	1.00	<130	0.56	3.23	2-20
F15T8	2	120	15	0/-18	0.46	31	1.00	<130	0.56	3.23	2-20
F14T12	2	120	14	0/-18	0.41	27	0.88	<130	0.54	3.26	2-20
F14T8	2	120	14	0/-18	0.41	27	0.88	<130	0.54	3.26	2-20

WIRING DIAGRAM

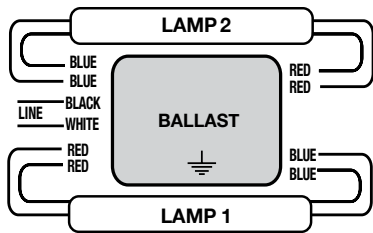


2-20

STANDARD LEAD LENGTHS

	in.	cm.
Black	18	45.72
White	18	45.72
Blue	18	45.72
Red	18	45.72


OCV: <300V

CASE DIAGRAM

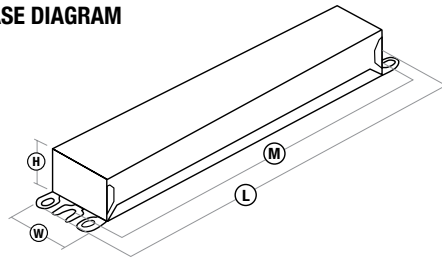

Overall (L)	Width (W)	Height (H)	Mounting (M)
6.46"	1.37"	1.00"	6.00"

HOT SPOT LOCATION



Maximum Case Temperature: 167°F

Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

PN# 50110

