


ProLume ProFormance[®] Electronic Linear Fluorescent Ballast Specifications

Ballast Type: Electronic Fluorescent
Starting Method: Instant Start
Lamp Connection: Parallel
Input Voltage: 120V
Input Frequency: 60Hz

Lamp Type	# of Lamps	Volts	Rated Lamp Watts	Min. Start Temp (°F/°C)	Input Current (Amps)	Input Power (Watts)	Ballast Factor	THD %	Power Factor	B. E. F.	Wire Diag.
F32T8	4	120	32	0/-18	0.93	110	0.88	<20	0.98	0.79	4-6
F32T8	3	120	32	0/-18	0.79	94	1.00	<20	0.98	1.06	3-9
F25T8	4	120	25	0/-18	0.74	89	0.94	<20	0.98	1.06	4-6
F25T8	3	120	25	0/-18	0.62	74	1.04	<20	0.98	1.41	3-9
F17T8	4	120	17	0/-18	0.51	61	0.96	<20	0.98	1.57	4-6
F40T8	3	120	40	32/0	0.93	112	0.88	<20	0.98	0.79	3-9

Also operates equivalent U-shaped lamps

WIRING DIAGRAMS

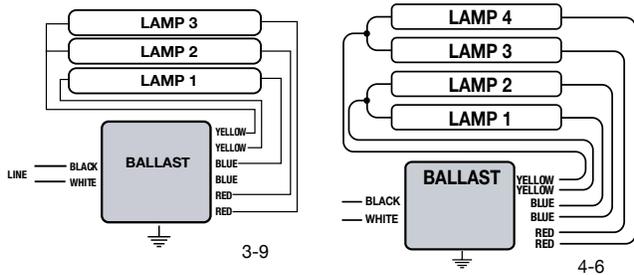


STANDARD LEAD LENGTHS

	in.	cm.
Black	25	63.50
White	25	63.50
Blue	31	78.74
Red	31	78.74
Yellow	46	114.30

OCV: 600V


CASE DIAGRAM

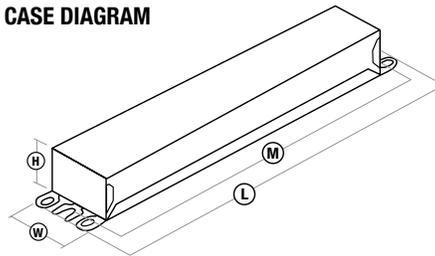

CASE DIMENSIONS

Overall (L)	Width (W)	Height (H)	Mounting (M)
9.50"	1.30"	1.1"	8.90"

HOT SPOT LOCATION



Maximum Case Temperature: 167°F

Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

PN# 50124