

ProLume

Electronic Compact Fluorescent Ballast Specifications

Ballast Type: Electronic Compact Fluorescent Kit


Starting Method: Programmed Start

Lamp Connection: Series

Input Voltage: 120-277V

Input Frequency: 50/60Hz

Lamp Type	# of Lamps	Volts	Rated Lamp Watts	Min. Start Temp (°F/°C)	Input Current (Amps)	Input Power (Watts)	Ballast Factor	THD %	Power Factor	B. E. F.	Wire Diag.
PL26D/E/G24q	2	120	26	0/-18	0.45	51	1.00	<10	0.99	1.96	2-6
		277			0.19						
PL26D/E/G24q	1	120	26	0/-18	0.24	27	1.00	<10	0.98	3.70	1-9
		277			0.11						
PL26T/E/GX24q	2	120	26	0/-18	0.45	54	1.00	<10	0.99	1.85	2-6
		277			0.19						
PL26T/E/GX24q	1	120	26	0/-18	0.23	29	1.00	<10	0.98	3.45	1-9
		277			0.10						
PL32T/E/GX24q	1	120	32	0/-18	0.26	36	0.98	<10	0.98	2.72	1-9
		277			0.13						
PL42T/E/GX24q	1	120	42	0/-18	0.38	46	0.98	<10	0.98	2.13	1-9
		277			0.17						
PL57T/E/GX24q	1	120	57	0/-18	0.43	56	0.85	<10	0.99	1.52	1-9
		277			0.19						
PLL18/2G11	2	120	18	0/-18	0.31	35	0.92	<10	0.99	2.63	2-6
		277			0.14						
PLL24/2G11	2	120	24	0/-18	0.43	48	0.93	<10	0.99	1.94	2-6
		277			0.18						
PL21/2D/GR10q	2	120	21	0/-18	0.40	51	1.12	<10	0.99	2.20	2-16
		277			0.17						
PL28/2D/GR10q	1	120	28	0/-18	0.25	32	1.00	<12	0.99	3.13	1-14
		277			0.11						
FC40T5	1	120	40	0/-18	0.34	41	0.90	<10	0.99	2.20	1-13
		277			0.15						
FC16T9	1	120	40	0/-18	0.34	43	1.00	<10	0.99	2.33	1-13
		277			0.15						

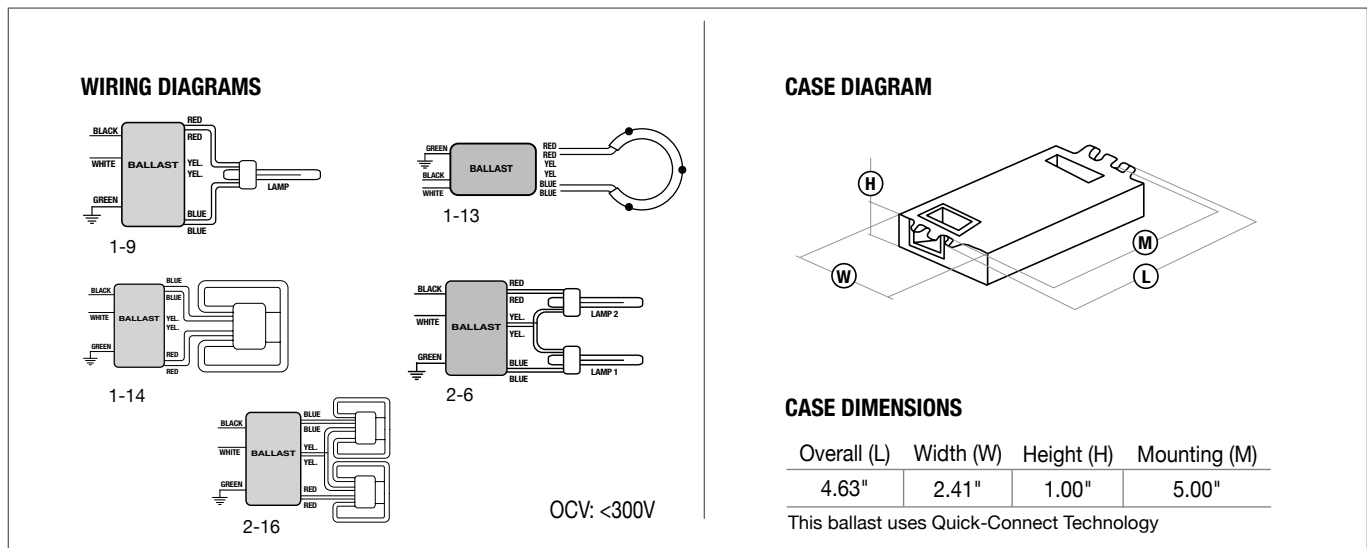

Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.



PN# v