

# ProLED Select HoverBay Round Highbay Series



## Key Benefits & Features

- Rugged Diecast Housing with a Sleek Modern Design
- Field Selectable 4000K & 5000K Color Temp
- 100W, 150W, 200W & 240W Options Available
- Lumens Ranging from 14,000 — 33,000
- Efficacy Ranging from 136-144 LPW
- IP66 Wet Location Listed
- Universal 120-277VAC Input Voltage
- 90° Standard Lens, with 60°, 110° and Frosted Lens Options
- Polycarbonate and Aluminum Reflector Options
- Standard Hook, Yoke and Pendant Mount Options Available
- Standard 6' Dimming and Power Cord
- 6kV Surge Protection
- L70 Lumen Maintenance > 100,000 hours at 25C
- DLC 5.1 Premium
- Easy Field Installable Bi-Level Motion Sensor




The HoverBay Round Highbay offers an exciting combination of a sleek modern design and premium performance. Equipped with ProLED Select CCT Selectable technology, the HoverBay allows the user to select between 4000K and 5000K color temperatures in the field.

With ease of installation, application versatility and ProLED Select CCT selectable technology, the HoverBay is the ideal choice for retrofit and new build applications.





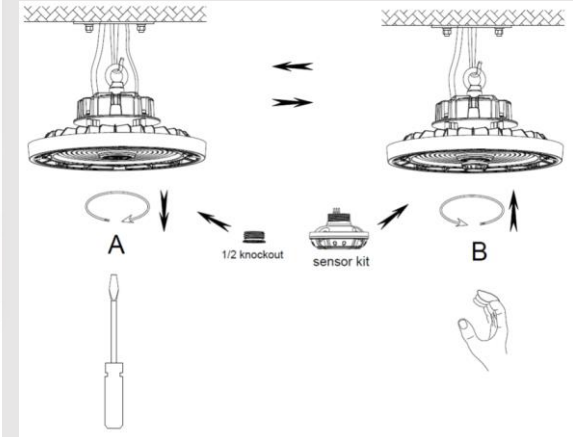



## Quick Install Controls



## FAQs

- What color temperatures are available? 4000K and 5000K Field Selectable CCT.
- What wattages are available in this fixture? We have 4 wattages available (100W, 150W, 200W & 240W) Covering between 14,000-33,000 lumens.
- How do I select the Color Temps? CCT is selected via slide switch. Switch is located under IP66 rated gasketing on face of fixture.
- Are these Fixtures available with motion sensing and battery backup options? Yes, we have bi-level motion sensors and batteries available as user installed accessories.
- What application are these used in? Round Highbays can be used in warehouses, showrooms, gymnasiums, big box and retail stores, as well as manufacturing facilities.

# COMPETITIVE COMPARISON

<b>ProLED Select HoverBay Round HighBay</b>	<b>Halco</b>	<b>Signify</b>	<b>Satco</b>	<b>Topaz</b>	<b>Eiko</b>	<b>TCP</b>
	<b>HRHB</b>	<b>HCY</b>	<b>UFO Highbay</b>	<b>Satellite Series</b>	<b>Bay-E &amp; Bay-C</b>	
						
<b>Wattages</b>	100, 150, 200, 240	100, 150, 200, 240	100, 150, 200, 240	150 & 240	100, 150, 200, 240	100, 150, 200, 240 & 300
<b>Lumen Range</b>	14,000-33,000 Lumens	14,000-33,000 Lumens	14,000-33,000 Lumens	20,000-31,000 Lumens	15,000-38,000 Lumens	14,000-43,000 Lumens
<b>Efficacy</b>	135-146 LPW	152-160 LPW	140 LPW	130 LPW	136-139 LPW	>140 LPW
<b>CCT Selectable</b>	Yes	Yes	No	No	No	No
<b>CCT</b>	4000K/5000K	4000K/5000K	4000K & 5000K	4000K & 5000K	4000K & 5000K	4000K & 5000K
<b>CRI</b>	>80	>80	>80	>80	>80	>80
<b>Voltage</b>	120-277V	120-277V	120-277V	120-277V & 347-480V	120-277V & 347-480V	120-277V
<b>Dimming</b>	0-10VDC	0-10VDC	0-10VDC	0-10VDC	0-10VDC	0-10VDC
<b>Battery Backup</b>	Yes	No	No	No	No	No
<b>Motion Sensor</b>	Yes	Yes	Yes	Yes	Yes	Yes
<b>Operating Temp</b>	-22°F to 131°F	-22°F to 104°F	-22°F to 122°F	-40°F to 122°F	-31°F to 113°F	-22°F to 104°F
<b>Construction</b>						
<b>Lens Material</b>	PolyCarb	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Acrylic Lens
<b>Multiple Lens Options</b>	Yes	No	Yes	No	Yes	No
<b>Reflector Options</b>	Yes	Yes	Yes	No	No	No
<b>Standard Hook Mount</b>	Yes	Yes	No	Yes	Yes	No
<b>Multiple Mounting Options</b>	Yes	Yes	Yes	No	Yes	No
<b>Finish</b>	Black & White	Black & White	Black & White	White	Black	Black
<b>Rated Life @ 25c</b>	>100,000	>72,000	>70,000	>50,000	54,000	>50,000
<b>Warranty</b>	5 Year	5 Year	5 Year	5 Year	5 Year	5 Year
<b>Certifications / Ratings</b>						
<b>UL</b>	Yes	Yes	Yes	Yes	Yes	Yes
<b>DLC 5.1</b>	Premium	Premium	Premium	Standard	Premium	No (4.4 Listed)
<b>IP Rating</b>	IP66	IP65	IP65	IP67	IP65	IP65