

**Applications:**

Tunnel (except for motor vehicle tunnel), workshop, warehouse, factory, house, building exterior, etc.



**Cautions:**

1. Do not use an electric generator to test the LED fixture;
2. Please abide by appropriate national, regional and local law and regulations when install this fixture;
3. Do not install the fixture when raining to lower the risk of electric shock and avoid failure.


**Cautions:**

1. To avoid possibility of electrical shock or fire, the installation personnel must have professional electric knowledge;
2. Wear gloves to avoid injury before installation;
3. If any smoke or spark of the wire happened, please turn off the power immediately and notify relevant personnel;
4. This fixture is available in outdoor usage, but the distance from fixture to ground should be more than 2m.


This installation instruction applies to the following products. Although the products vary in appearance, the installation steps are the same:

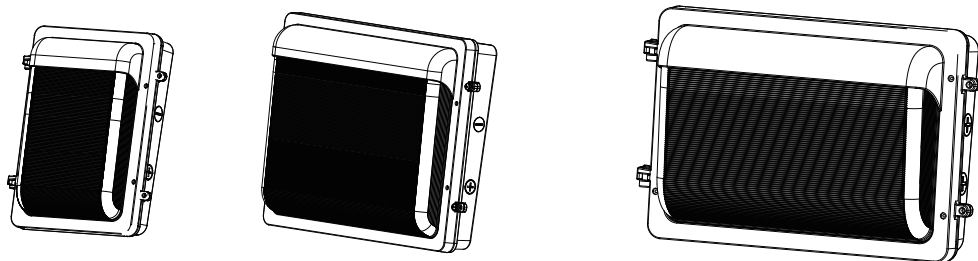**Installation I:**


1. Turn off the power.

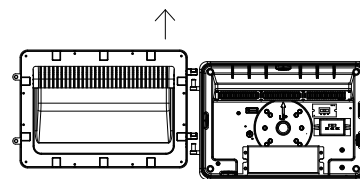


3. Open the fixture, and remove the upper cover of the fixture.




5. Use a screwdriver to remove the plug. Attach the EVA cotton pad to bottom.

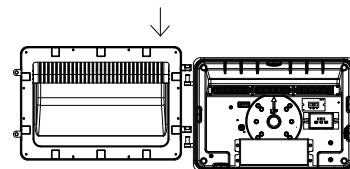


7. Mount the cover of the fixture.




9. Make sure the installation is complete before turning on the power switch.

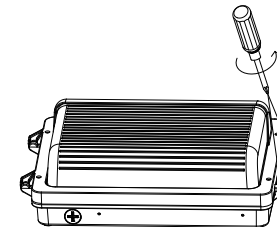


2. Use a screwdriver to remove the screws on both sides.



4. Drill mounting holes with an electric drill.




6. Lock the bottom shell on the mounting seat with screws. Connect the L, N and G wires to the power supply.




8. Fix the fixture with screws.


**Installation II:**




1. Turn off the power.

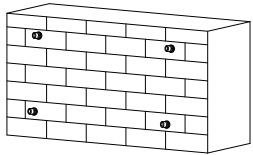


3. Drill mounting holes with an electric drill. Push the expansion rubber plug into the mounting hole on the wall.

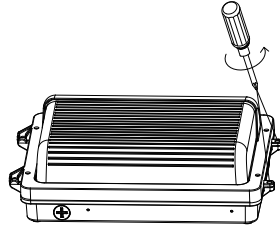


2. Use a screwdriver to remove the screws on both sides and remove the upper cover of the fixture.

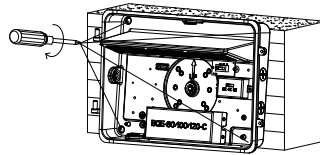


4. Lock the bottom shell on the mounting seat with screws.

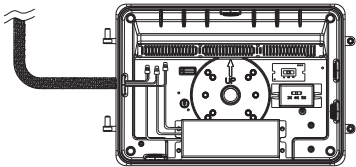

5. Connect the L, N and G wires to the power supply.

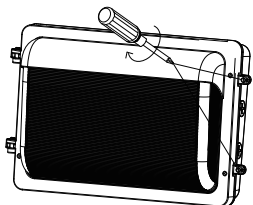

7. Fix the fixture with screws



8. Make sure the installation is complete before turning on the power switch.


**Standard wire:**

L/live wire: Black\Brown; N/null wire: White\Blue; Ground wire: Green\Yellow-green.

Warning: During grounding, make sure the earth wire of the driver and fixture housing are connected together with the earth wire of the local power supply.

Operate as following instructions if the product is designed with below functions

**Special functions instruction :**

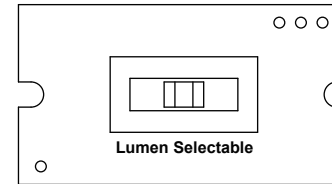


Product SKU	Product Code	Lumen Selectable at 5000K
39860	LPWP-1-LS-CS-U-BZ	2025-2700-3375
39861	LPWP-2-LS-CS-U-BZ	4050-5400-6750-8100
39862	LPWP-2-HLS-CS-U-BZ	9450-10800-12150-13500
39863	LPWP-3-LS-CS-U-BZ	13800-16560-19320

**Wattage adjustable instruction**

Turn the wattage adjustable knob to a certain wattage gear, the power of the lamp will change to the corresponding wattage. Adjustable wattage range 25%-100%.

**Note:** Please turn off the power before adjusting the wattage.


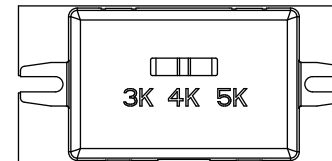


**Color tunable instruction**


- 1, The color temperature of the lamp turns to 3000K when the switch is set to 3K;
- 2, The color temperature of the lamp turns to 4000K when the switch is set to 4K;
- 3, The color temperature of the lamp turns to 5000K when the switch is set to 5K;

**Note:** Please turn off the power before adjusting the color temperature.

**Enable/ Disable Photocell**

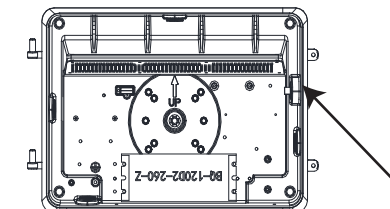

Enable

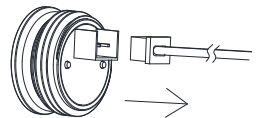

Disable