









Uniform illumination and architectural appeal in an energy efficient alternative to recessed fluorescent luminaires

Low-Profile, Lightweight Design

**Edge Lit Technology** 

**Emergency Battery Back-Up Options** 

Backed by a 5-Year Warranty

#### **Applications:**

Office Lobby Hallway Conference Room Classroom

## Markets:

Commercial Healthcare Retail Hospital

Contact Your Customer Care Specialist For Pricing, Orders And Technical Support.

800.677.3334 www.halcolighting.com




## **ProLED**. **Edge Lit Panel Series**

#### **Specifications**

- Edge lit technology delivers uniform illumination
- Remote driver enclosure with multiple knockouts for easy access
- ETL listed for damp locations
- Emergency Battery Options
- Surface mount kit available
- Drop ceiling
- Quiet & flicker-free LED technology

## Dimensions

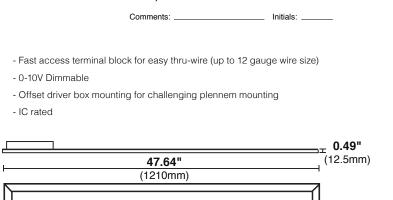



Type:

Date:

Product #: \_

Project:



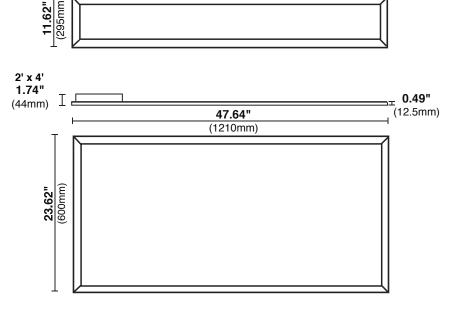

#### Ordering Information

	g Inform							WARRANTY	
Watt	Product #	Product Code	Volts	Color Temp.	CRI	Lumen Output	Useful Life*	Dimmable	Equiva Wattag
1' x 4'									
40	81982	14EPL40/835/LED	120-277	3500K	82	4000	50,000	0-10V	(2) 32
40	81983	14EPL40/840/LED	120-277	4000K	82	4000	50,000	0-10V	(2) 32
40	81984	14EPL40/850/LED	120-277	5000K	82	4000	50,000	0-10V	(2) 32
1' x 4' wit	h Emergency Ba	ickup							
40	81988	14EPL40/835/EM/LED	120-277	3500K	82	4000	50,000	0-10V	(2) 32
40	81989	14EPL40/840/EM/LED	120-277	4000K	82	4000	50,000	0-10V	(2) 32
40	81990	14EPL40/850/EM/LED	120-277	5000K	82	4000	50,000	0-10V	(2) 32
2' x 2'									
30	81963	22EPL30/835/LED	120-277	3500K	82	3000	50,000	0-10V	(2) 32
30	81964	22EPL30/840/LED	120-277	4000K	82	3050	50,000	0-10V	(2) 32
30	81965	22EPL30/850/LED	120-277	5000K	82	3150	50,000	0-10V	(2) 32
2' x 2' wit	h Emergency Ba	ickup							
30	81969	22EPL30/835/EM/LED	120-277	3500K	82	3000	50,000	0-10V	(2) 32
30	81970	22EPL30/840/EM/LED	120-277	4000K	82	3050	50,000	0-10V	(2) 32
30	81971	22EPL30/850/EM/LED	120-277	5000K	82	3150	50,000	0-10V	(2) 32
2' x 4'									
50	81966	24EPL50/835/LED	120-277	3500K	82	5000	50,000	0-10V	(4) 32
50	81967	24EPL50/840/LED	120-277	4000K	82	5100	50,000	0-10V	(4) 32
50	81968	24EPL50/850/LED	120-277	5000K	82	5300	50,000	0-10V	(4) 32
2' x 4' wit	h Emergency Ba	ckup							
50	81972	24EPL50/835/EM/LED	120-277	3500K	82	5000	50,000	0-10V	(4) 32
50	81973	24EPL50/840/EM/LED	120-277	4000K	82	5100	50.000	0-10V	(4) 32
50	81974	24EPL50/850/EM/LED	120-277	5000K	82	5300	50.000	0-10V	(4) 32

1' x 4'

1.74"

(44mm)

Ι

\* Useful Life is defined as the point in time at which the LED will maintain at least 70% of its initial lumens. The LED will continue to operate past this point at decreased light levels.

May not be compatible with all dimming systems, dimming performance may vary by system.

Warranty – Commercial / Industrial: This product is warranted for 5 years from the date of purchase. \*\* Check the latest update at www.DesignLights.org for listed product catalog numbers. Not all versions are listed.

1 Visit halcolighting.com for luminaire photometry.

Halco Lighting Technologies 2940 Pacific Drive I Norcross, GA 30071 I Toll Free 800.677.3334 I Phone 770.242.3612 I Fax 800.880.0822 I halcolighting.com I Atlanta I Chicago I Cleveland I Houston I Phoenix I Los Angeles

# **ProLED** Edge Lit Panel Series

 Product #:
 Type:

 Project:
 Date:

Comments: \_\_\_\_\_ Initials: \_\_\_\_

### Surface Mount Kit

- Fully powdercoated white surface mount kit allows ProLED Edge Lit Panels to be installed on the surface of drywall or concrete ceilings
- High quality 22 gauge steel
- Easy to install
- Mounting hardware included



### **Ordering Information**

Product #	Product Code	Description	Color	Dimensions (L" x W" x H")
81985	14EPL/SMK	1' x 4' Surface Mount Kit for Edge Lit Panels	White	47.64" x 11.62" x 1.74"
81986	22EPL/SMK	2' x 2' Surface Mount Kit for Edge Lit Panels	White	23.62" x 23.62" x 1.74"
81987	24EPL/SMK24	2' x 4' Surface Mount Kit for Edge Lit Panels	White	47.64" x 23.62" x 1.74"