

Fire Rated Slim Downlight Installation Instructions



For Product Numbers: 89200, 89201, 89202, 89203, 89204, 89205, 89206 & 89207

IMPORTANT: READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.

WARNINGS:

TO PREVENT ELECTRICAL SHOCK, POWER SHOULD BE TURNED OFF AT THE FUSE BOX BEFORE INSTALLATION.

SAFETY WARNINGS:


Read all product labels and directions.

- **INSTALLATION SHOULD ONLY BE PERFORMED AFTER POWER TO THE FIXTURE HAS BEEN DISCONNECTED.**
- **WARNING – Risk of fire or electric shock.** Install this kit only in the luminaires that have the construction features and dimensions shown in the photographs and/or drawings and where the input rating of the retrofit kit does not exceed the input rating of the luminaire.
- Installation should be performed only by a qualified electrician in accordance with the National Electrical Code and relevant local codes. Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.
- **WARNING – To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.**
- These instructions shall be included on an information sheet packaged with each unit.
- This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

INSTALLATION INSTRUCTIONS


1. Turn power OFF from the electrical panel before installation.
2. Use template inside box to cut hole in ceiling. (Fig.1)

Fig: 1

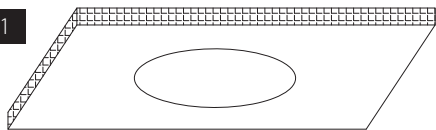

3. Open the driver box and remove the knockout(s). (Fig.2)


Fig: 2



INSTALLATION INSTRUCTIONS (cont'd)

4. Insert the electrical supply cable through the knockout and secure with a terminal. Wire driver box (Fig.3), white-white, black - black, green - green/ground.

Fig: 3




Fire Rated Slim Downlight Installation Instructions



INSTALLATION INSTRUCTIONS (cont'd)


5. Place all wiring and connections back into the box, close the cover and select desired CCT. (Fig.4)

Fig: 4



6. Mount the driver box in the ceiling per local NEC code. Plug the quick connect cord together and secure with locking screw nut. (Fig.5)


Fig: 5

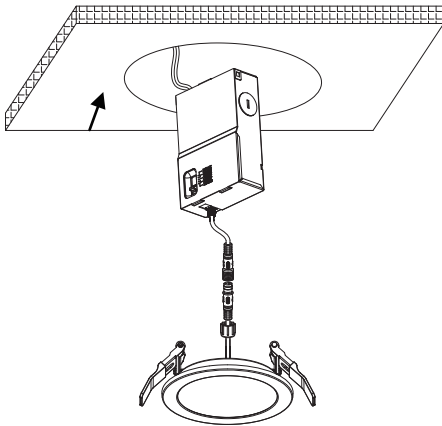

INSTALLATION INSTRUCTIONS (cont'd)

7. Raise both spring clips and insert them into the ceiling cutout. Release the spring clips and adjust as necessary to make sure the fixture is flush with the ceiling and centered within the ceiling cutout. (Fig.6)

Fig: 6

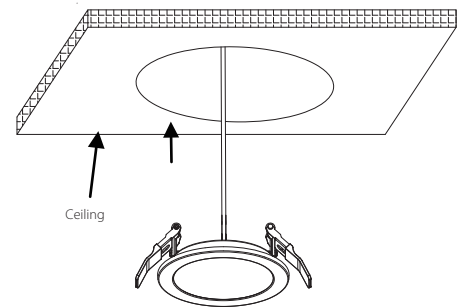

Warranty Information:

This product is warranted for 5 years from the date of purchase. If this product does not perform to the specifications supplied on this package, send an email or write to the address below for product return and replacement. This replacement is the sole remedy available. Liability for incidental or consequential damage is expressly excluded. Visit www.halcolighting.com for full warranty details and compatibility information.