Wallpack Installation Instructions



GENERAL SAFETY INFORMATION

- To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards read all warnings and instructions included with and on the fixture box and all fixture labels.
- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- Commercial installation, service and maintenance of luminaires should be performed by a qualified licensed electrician.
- For Residential installation: If you are unsure about the installation or maintenance of the luminaires, consult a qualified licensed electrician and check your local electrical code.
- DO NOT INSTALL DAMAGED PRODUCT!
- This fixture is intended to be connected to a properly installed and grounded UL listed junction box.
- Voltage input: 120-277V 50/60 Hz only

WARNING: RISK OF ELECTRICAL SHOCK

- Turn off the power when you perform any maintenance.
- Verify that supply voltage is correct by comparing it with the luminaire label information.
- Make all electrical and grounded connections in accordance with the National Electrical Code and any applicable local code requirements.
- · All wiring connections should be capped with UL approved wire connectors.

A CAUTION: RISK OF INJURY

- Wear gloves and safety glasses at all times when removing luminaire from carton, installing, servicing or performing maintenance.
- · Avoid direct eye exposure to the light source while it is on.
- Account for small parts and destroy packing material, as these may be hazardous to children.


A CAUTION: RISK OF FIRE

- Keep combustible and other materials that can burn away from luminaire and lamp/lens.
- MIN 90°C SUPPLY CONDUCTORS.

Illustrations in the manual are for installation purposes only. It may not be identical to the fixture purchased.

GENERAL WIRING DIAGRAM


CAUTION: Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.

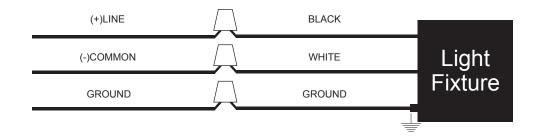






MOUNTING INSTRUCTIONS



STEP 1

Loosen two captive screws on side of housing and remove front housing. Remove knockout plug on the back of the fixture. Drill appropriate points and attach using appropriate hardware (not included).


Note: LED fixtures utilizes a mult-volt (120-277V) that is auto sensing, no rewiring is necessary.



STEP 2


Wiring before lamp installation. The zero line is connected to the zero line. The ground line is grounded, and the live line is connected to the fire line.

Note: LED fixtures utilizes a mult-volt (120-277V) that is auto sensing, no rewiring is necessary.



STEP 3

Drill holes according to the mounting hole position of the lamp body (recommended to use 10 bolts and drill holes below Φ 6mm). Fix the lighting fixture on the mounting surface with fasteners and adjust the CCT and wattage according to the adjustment diagram.



STEP 4

Tighten two captive screws on side of housing.