



## ProLume ProFormance

### Electronic Linear Fluorescent Ballast Specifications

Ballast Type: Electronic Fluorescent  
 Starting Method: Instant Start  
 Lamp Connection: Parallel  
 Input Voltage: 120-277V  
 Input Frequency: 50/60Hz

Lamp Type	# of Lamps	Volts	Rated Lamp Watts	Min. Start Temp (°F/°C)	Input Current (Amps)	Input Power (Watts)	Ballast Factor	THD %	Power Factor	B. E. F.	Wire Diag.
F96T8	2	120	59	32/0	0.92	108	0.83	<10	0.98	0.77	2-17
		277			0.40	106	0.83		0.98	0.78	
F96T8	1	120	59	32/0	0.57	68	1.04	<10	0.98	1.52	1-3
		277			0.25	67	1.04		0.98	1.55	

#### WIRING DIAGRAMS




#### STANDARD LEAD LENGTHS

	in.	cm.
Black	25	60.96
White	25	60.96
Blue	46	121.92
Red	79	182.88

OCV: 1000V


#### CASE DIAGRAM

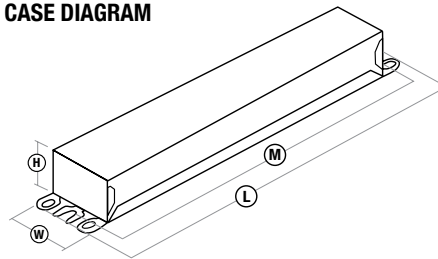

#### CASE DIMENSIONS

Overall (L)	Width (W)	Height (H)	Mounting (M)
9.50"	1.30"	1.10"	8.90"

#### HOT SPOT LOCATION



Maximum Case Temperature: 167°F

Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

PN# 50136

