


ProLume

Electronic Linear Fluorescent Ballast Specifications

Ballast Type: Electronic Fluorescent
 Starting Method: Rapid Start
 Input Voltage: 120V
 Input Frequency: 50/60Hz

Lamp Type	# of Lamps	Volts	Rated Lamp Watts	Min. Start Temp (°F/°C)	Input Current (Amps)	Input Power (Watts)	Ballast Factor	THD %	Power Factor	B. E. F.	Wire Diag.
FC8T9	1	120	22	0/-18	0.28	17	0.90	<150	0.52	5.29	1-4

WIRING DIAGRAM

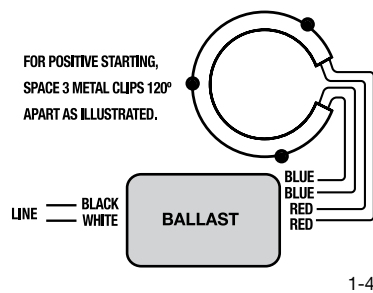


STANDARD LEAD LENGTHS

	in.	cm.
Black	12	30.48
White	12	30.48
* Blue	9	22.86
* Red	9	22.86

* Pigtailed

OCV: <300V


CASE DIAGRAM

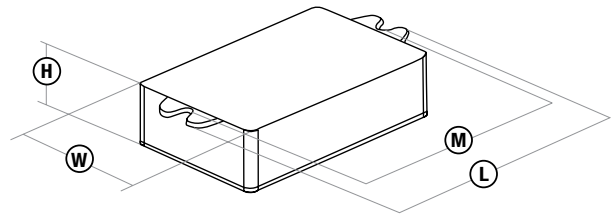

CASE DIMENSIONS

Overall (L)	Width (W)	Height (H)	Mounting (M)
3.43"	1.81"	1.21"	3.12"

HOT SPOT LOCATION



Maximum Case Temperature: 167°F

Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

PN# 50150