



## LED LAMPS

### **ProLED<sup>®</sup>** **ECO Select PAR Series**



IP65 Rated



5-Year Warranty



Dimmable

The energy efficiency of LED with the look and feel of traditional halogen lamps



- 25,000 Hour Life
- 82 CRI
- Dimmable
- IP65 Rated for Outdoor Use
- 5-Year Warranty

A limited budget doesn't mean sacrificing quality features; ECO Select delivers reliable performance at a budget-friendly price

#### **Applications:**

Accent  
Display  
Education  
Healthcare  
Hospitality  
Office  
Retail

#### **Markets:**

Commercial  
Residential  
Outdoor

ProLED®  
ECO Select PAR Series


Product #: \_\_\_\_\_ Type: \_\_\_\_\_

Project: \_\_\_\_\_ Date: \_\_\_\_\_


Comments: \_\_\_\_\_ Initials: \_\_\_\_\_

Specifications

- IP65 Rated for indoor/outdoor application flexibility
- Acceptable for use in ICAT rated luminaires
- Dimmable to 10%
- Prismatic glass lens and silver housing offers traditional halogen PAR look and feel
- Superior efficacy – up to 80 lumens per watt

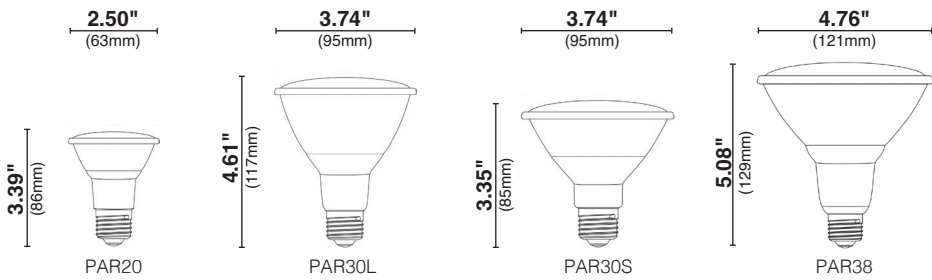

Savings Comparison

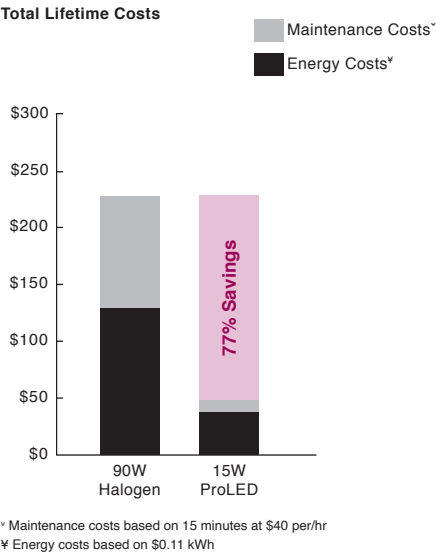

Ordering Information



Watt	Base	Product #	Product Code	Description	Volts	Color Temp.	CRI	Lumens	CBCP	Useful Life*	Beam Spread	Pkg. Qty.	MOL	Equivalent Wattage
PAR20														
7	Medium	82963	PAR20FL7/827/ECO2/LED	Flood	120	2700K	82	500	740	25,000	40°	1/20	3.39"	50
7	Medium	82964	PAR20FL7/830/ECO2/LED	Flood	120	3000K	82	530	740	25,000	40°	1/20	3.39"	50
7	Medium	82965	PAR20FL7/840/ECO2/LED	Flood	120	4000K	82	550	740	25,000	40°	1/20	3.39"	50
7	Medium	82966	PAR20FL7/850/ECO2/LED	Flood	120	5000K	82	570	740	25,000	40°	1/20	3.39"	50
PAR30 L														
10	Medium	82958	PAR30FL10L/827/ECO2/LED	Flood	120	2700K	82	760	1530	25,000	40°	1/15	4.61"	60
10	Medium	82959	PAR30FL10L/830/ECO2/LED	Flood	120	3000K	82	800	1530	25,000	40°	1/15	4.61"	60
10	Medium	82960	PAR30FL10L/840/ECO2/LED	Flood	120	4000K	82	840	1530	25,000	40°	1/15	4.61"	60
10	Medium	82967	PAR30FL10L/850/ECO2/LED	Flood	120	5000K	82	880	1530	25,000	40°	1/15	4.61"	60
10	Medium	82968	PAR30NFL10L/830/ECO2/LED	Narrow Flood	120	3000K	82	800	1530	25,000	25°	1/15	4.61"	60
PAR30 S														
10	Medium	81961	PAR30FL10S/827/ECO2/LED	Flood	120	2700K	82	760	970	25,000	40°	1/15	3.35"	75
10	Medium	81962	PAR30FL10S/830/ECO2/LED	Flood	120	3000K	82	800	970	25,000	40°	1/15	3.35"	75
10	Medium	82969	PAR30FL10S/840/ECO2/LED	Flood	120	4000K	82	840	970	25,000	40°	1/15	3.35"	60
10	Medium	82970	PAR30FL10S/850/ECO2/LED	Flood	120	5000K	82	880	970	25,000	40°	1/15	3.35"	60
10	Medium	82971	PAR30NFL10S/830/ECO2/LED	Narrow Flood	120	3000K	82	800	970	25,000	25°	1/15	3.35"	60
PAR38														
15	Medium	81953	PAR38FL15/827/ECO2/LED	Flood	120	2700K	82	1150	1720	25,000	40°	1/15	5.08"	90
15	Medium	81954	PAR38FL15/830/ECO2/LED	Flood	120	3000K	82	1200	1720	25,000	40°	1/15	5.08"	90
15	Medium	81955	PAR38FL15/840/ECO2/LED	Flood	120	4000K	82	1250	1720	25,000	40°	1/15	5.08"	90
15	Medium	81956	PAR38FL15/850/ECO2/LED	Flood	120	5000K	82	1280	1720	25,000	40°	1/15	5.08"	90
15	Medium	81957	PAR38NFL15/830/ECO2/LED	Narrow Flood	120	3000K	82	1200	1720	25,000	25°	1/15	5.08"	90
15	Medium	82972	PAR38NFL15/850/ECO2/LED	Narrow Flood	120	5000K	82	1280	1720	25,000	25°	1/15	5.08"	90

\* Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to burn past this point, but at decreased light levels.  
For details on ProLED PAR16, see ProLED Commercial MR16/PAR16 Series Sell Sheet.  
Warranty - Commercial/Industrial: This product is warranted for 5 years from the date purchase.  
Not for use in enclosed fixtures.  
May not be compatible with all dimmable systems, dimming performance may vary by system, please check the website [www.halcolighting.com](http://www.halcolighting.com) for up-to-date dimmer compatibility information. Use on incompatible systems may shorten lamp life.