LED Select Plug-In Selector Guide

LED PL - SINGLE TUBE - TYPE A + B (HYBRID)

SKU	PRODUCT CODE	REPLACES	WATTS	LUMENS	CCT	BASE	OPERATING POSITION
82844	PLS3H-8CS-HYB-G23-LED2	5W-9W, 2-Pin CFL, G-23	3.5W	360 - 370 - 380 - 400lm	Selectable 3000, 3500, 4000, 5000K	G-23	Horizontal
82845	PLS5H-8CS-HYB-GX23-LED2	13W, 2-Pin CFL, GX23	5.5W	580 - 590 - 600 - 620lm		GX23	

LED PL - DOUBLE TUBE - TYPE A + B (HYBRID)

SKU	PRODUCT CODE	REPLACES	WATTS	LUMENS	CCT	BASE	OPERATING POSITION
82846	PLD5O-8CS-HYB-GX23-LED2	13W, 2-Pin CFL, GX23-2	5.5W	720 - 750 - 800 - 800lm	Selectable 3000, 3500, 4000, 5000K	GX23	Omni
82847	PLD7O-8CS-HYB-GX32-LED2	22W, 2-Pin CFL, GX32d-2	7W	860 - 900 - 960 - 960lm		GX32D	
82848	PLD9O-8CS-HYB-GX32-LED2	28W, 2-Pin CFL, GX32d-3	9W	1050 - 1100 - 1200 - 1200lm		GX32D	
82849	PLD5O-8CS-HYB-G24D-LED2	13W, 4-Pin CFL, G24q-1	5.5W	720 - 750 - 800 - 800lm		G24D	
82850	PLD7O-8CS-HYB-G24Q-LED2-D	18W, 4-Pin CFL, G24q-2	7W	860 - 900 - 960 - 960lm		G24Q	
82851	PLD9O-8CS-HYB-G24D-LED2	26W, 2-Pin CFL, G24d-3	9W	1050 - 1100 - 1200 - 1200lm		G24D	
82852	PLD9O-8CS-HYB-G24Q-LED2-D	26W, 4-Pin CFL, G24q-3	9.5W	1050 - 1100 - 1200 - 1200lm		G24Q	

LED PL - TRIPLE TUBE - TYPE B (BALLAST BYPASS)

SKU	PRODUCT CODE	REPLACES	WATTS	LUMENS	CCT	BASE	OPERATING POSITION
82855	PLT7O-8CS-BYP-GX24D-LED2	18W, 4-Pin CFL, GX24q-2	7W	860 - 900 - 960 - 960lm	Selectable 3000, 3500, 4000, 5000K	GX24D	Omni
82856	PLT9O-8CS-BYP-GX24D-LED2	26W, 4-Pin CFL, GX24q-3	9W	1050 - 1100 - 1200 - 1200lm		GX24D	
82857	PLT15O-8CS-BYP-GX24D-LED2	32W, 4-Pin CFL, GX24q-3	15W	1900 - 2000 - 2100 - 2200lm		GX24D	
82858	PLT17O-8CS-BYP-GX24D-LED2	42W, 4-Pin CFL, GX24q-4	17W	2200 - 2300 - 2400 - 2400lm		GX24D	
82859	PLT23O-8CS-BYP-GX24D-5-LED2	57W, 4-Pin CFL, GX24q-5	23W	3000 - 3100 - 3300 - 3300lm		GX24D-5	

LED PL - TYPE A (BALLAST COMPATIBLE)

SKU	PRODUCT CODE	REPLACES	WATTS	LUMENS	CCT	BASE	OPERATING POSITION
82853	PLD9H-8CS-DIR-G24Q-LED2-D	26W, 4-Pin CFL, G24q or GX24q	9.5W	960 - 1000 - 1000 - 1050lm	Selectable 3000, 3500, 4000, 5000K	GX24Q	Horizontal
82854	PLD9V-8CS-DIR-G24Q-LED2-D	26W, 4-Pin CFL, G24q or GX24q	9.5W	1080 - 1100 - 1120 - 1150lm		GX24Q	Vertical

ALL ARE CLOSED FIXTURE RATED

Note: G24D compatible with base G24d-1, G24d-2, G24d-3, G24q-1, G24q-2, G24q-3

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612 | Fax 800.880.0822
halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting Technologies, LLC.
All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change without notice.

SINGLE TUBE - TYPE A + B - 2-PIN - HORIZONTAL

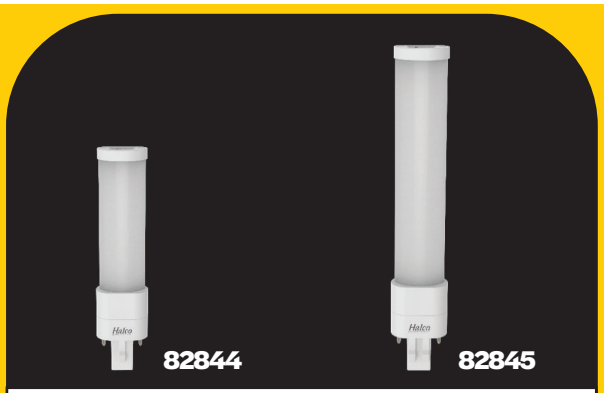

3.5W - G-23
REPLACES:
5-9W - G-23

5.5W - GX23
REPLACES:
13W - GX23

DIRECTIONAL TUBE - TYPE A - 4-PIN

Horizontal
9.5W - GX24Q
REPLACES:
26W
G24q or GX24q

Vertical
9.5W - GX24Q
REPLACES:
26W
G24q or GX24q

DOUBLE TUBE - TYPE A + B - 2-PIN - OMNI

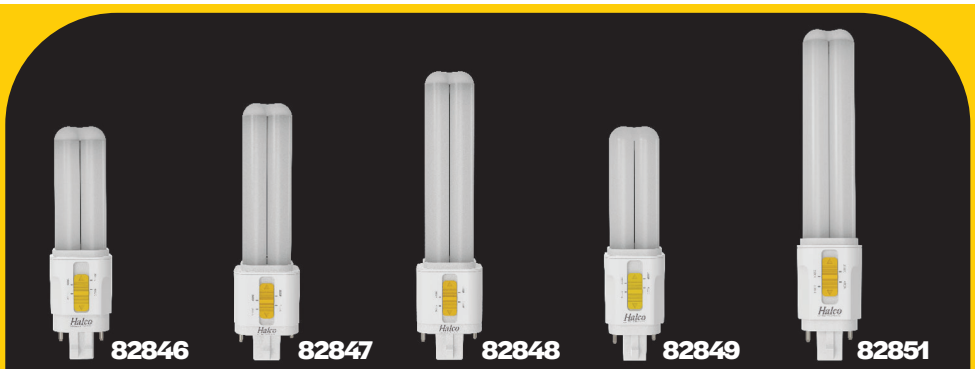

5.5W - GX23
REPLACES:
13W - GX23-2

7W - GX32D
REPLACES:
22W - GX32d-2

9W - GX32D
REPLACES:
28W - GX32d-3

5.5W - G24D
REPLACES:
13W - G24q-1

9W - G24D
REPLACES:
26W - G24d-3

AND 4-PIN - OMNI

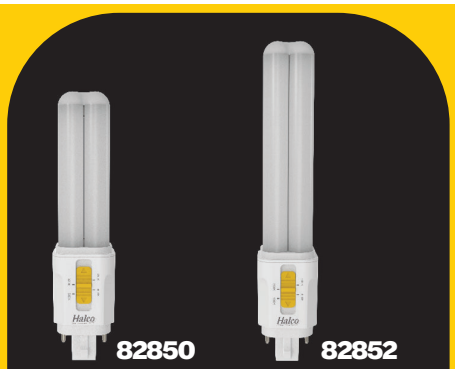

7W - G24Q
REPLACES:
18W - G24q-2

9.5W - G24Q
REPLACES:
26W - G24q-3

TRIPLE TUBE - TYPE B - 2-PIN - OMNI

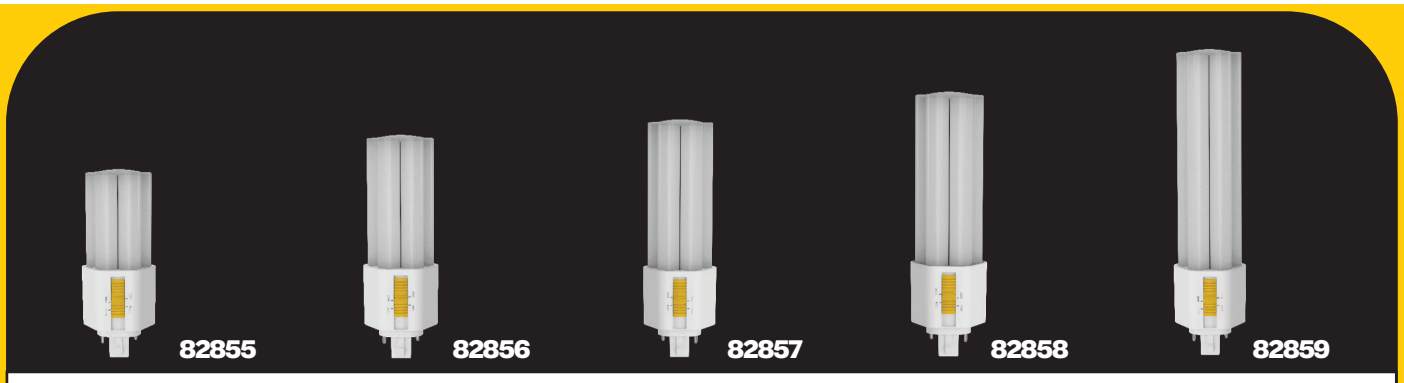

7W - GX24D
REPLACES:
18W - GX24q-2

9W - GX24D
REPLACES:
26W - GX24q-3

15W - GX24D
REPLACES:
32W - GX24q-3

17W - GX24D
REPLACES:
42W - GX24q-4

23W - GX24D-5
REPLACES:
57W - GX24q-5

ALL ARE CLOSED FIXTURE RATED

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612 | Fax 800.880.0822
halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting Technologies, LLC.
All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change without notice.

LED 2700K Plug-In Selector Guide

LED PL - SINGLE TUBE - TYPE A + B (HYBRID)

SKU	PRODUCT CODE	REPLACES	WATTS	LUMENS	CCT	BASE	OPERATING POSITION
82860	PLS3H-827-HYB-G23-LED2	5W-9W, 2-Pin CFL, G-23	3.5W	330lm	Dedicated 2700K	G-23	Horizontal
82861	PLS5H-827-HYB-GX23-LED2	13W, 2-Pin CFL, GX23	5.5W	550lm		GX23	

LED PL - DOUBLE TUBE - TYPE A + B (HYBRID)

SKU	PRODUCT CODE	REPLACES	WATTS	LUMENS	CCT	BASE	OPERATING POSITION
82862	PLD5O-827-HYB-GX23-LED2	13W, 2-Pin CFL, GX23-2	5.5W	720lm	Dedicated 2700K	GX23	Omni
82865	PLD7O-827-HYB-GX32-LED2	22W, 2-Pin CFL, GX32d-2	7W	860lm		GX32D	
82867	PLD9O-827-HYB-GX32-LED2	28W, 2-Pin CFL, GX32d-3	9W	1050lm		GX32D	
82863	PLD5O-827-HYB-G24D-LED2	13W, 4-Pin CFL, G24q-1	5.5W	720lm		G24D	

LED PL - DOUBLE TUBE - TYPE A (BALLAST COMPATIBLE)

SKU	PRODUCT CODE	REPLACES	WATTS	LUMENS	CCT	BASE	OPERATING POSITION
82864	PLD7O-827-DIR-G24Q-LED2-D	18W, 4-Pin CFL, G24q-2	7W	800lm	Dedicated 2700K	G24Q	Omni
82866	PLD9O-827-DIR-G24Q-LED2-D	26W, 4-Pin CFL, G24q-3	9.5W	1150lm		G24Q	

LED PL - TRIPLE TUBE - TYPE B (BALLAST BYPASS)

SKU	PRODUCT CODE	REPLACES	WATTS	LUMENS	CCT	BASE	OPERATING POSITION
82868	PLT9O-827-BYP-GX24D-LED2	26W, 4-Pin CFL, GX24q-3	9W	1050lm	Dedicated 2700K	GX24D	Omni
82869	PLT17O-827-BYP-GX24D-LED2	42W, 4-Pin CFL, GX24q-4	17W	2200lm		GX24D	

ALL ARE CLOSED FIXTURE RATED

Note: G24D compatible with base G24d-1, G24d-2, G24d-3, G24q-1, G24q-2, G24q-3

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612 | Fax 800.880.0822
halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting Technologies, LLC.
All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change without notice.

SINGLE TUBE - TYPE A + B - 2-PIN - HORIZONTAL

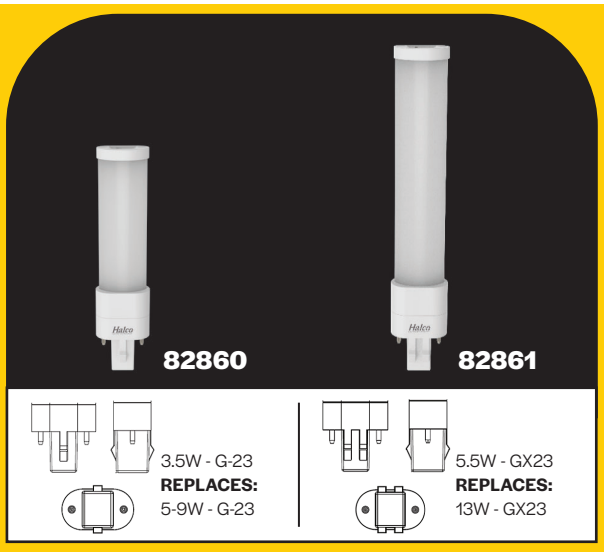

82860

3.5W - G-23
REPLACES:
5-9W - G-23

82861

5.5W - GX23
REPLACES:
13W - GX23

TRIPLE TUBE - TYPE B - 2-PIN - OMNI

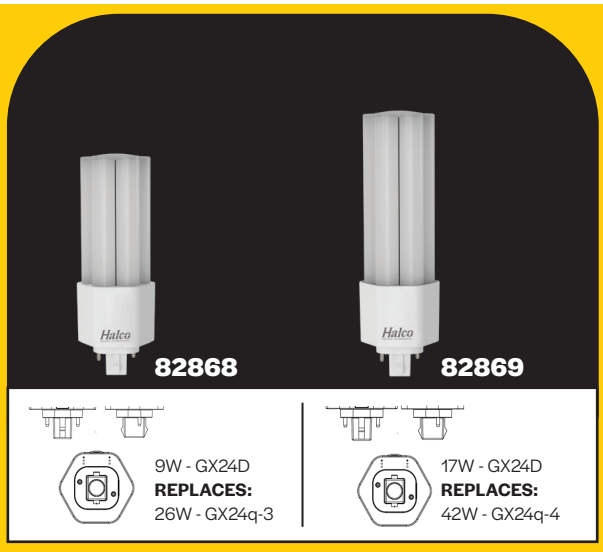

82868

9W - GX24D
REPLACES:
26W - GX24q-3

82869

17W - GX24D
REPLACES:
42W - GX24q-4

DOUBLE TUBE - TYPE A + B - 2-PIN - OMNI

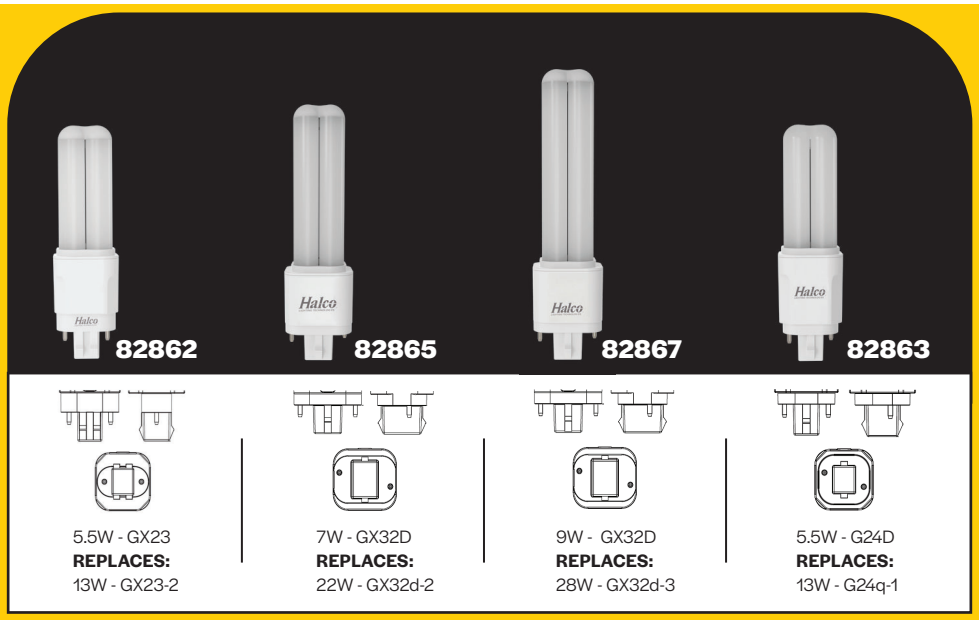

82862

5.5W - GX23
REPLACES:
13W - GX23-2

82865

7W - GX32D
REPLACES:
22W - GX32d-2

82867

9W - GX32D
REPLACES:
28W - GX32d-3

82863

5.5W - G24D
REPLACES:
13W - G24q-1

TYPE A - 4-PIN - OMNI

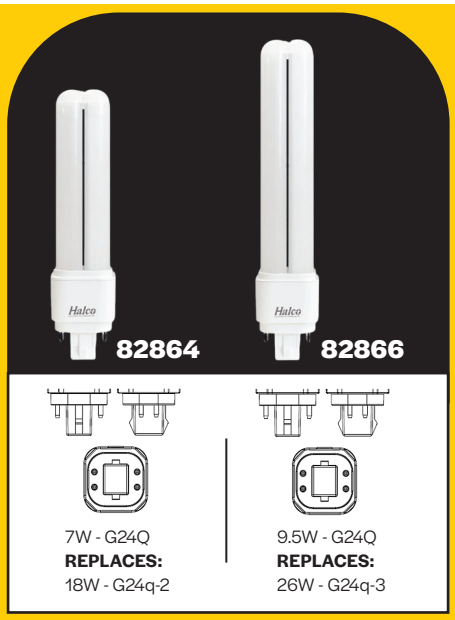

82864

7W - G24Q
REPLACES:
18W - G24q-2

82866

9.5W - G24Q
REPLACES:
26W - G24q-3

ALL ARE CLOSED FIXTURE RATED

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612 | Fax 800.880.0822
halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting Technologies, LLC.
All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change without notice.

LED Linear Plug-In Selector Guide

LONG TUBE - TYPE A + B (HYBRID) - 4-PIN

SKU	PRODUCT CODE	REPLACES	WATTS	LUMENS	CCT	BASE	OPERATING POSITION
82870	PLL8-8CS-HYB-2G11-LED2	18W / 4-Pin CFL / 2G11	8.5W	1000, 1050, 1100, 1100, 1050	Selectable 3000K, 3500K, 4000K, 5000K, 6500K	2G11	Horizontal
82871	PLL10-8CS-HYB-2G11-LED2	24W / 4-Pin CFL / 2G11	10W	1250, 1300, 1350, 1350, 1300			
82872	PLL14-8CS-HYB-2G11-LED2	36W / 4-Pin CFL / 2G11	14W	1850, 1900, 2000, 2000, 1900			
82873	PLL15-8CS-HYB-2G11-LED2	40W / 4-Pin CFL / 2G11	15W	2100, 2150, 2300, 2300, 2200			
82874	PLL22-8CS-HYB-2G11-LED2	55W / 4-Pin CFL / 2G11	22W	2900, 3100, 3200, 3200, 3100			

ALL ARE CLOSED FIXTURE RATED

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612 | Fax 800.880.0822
halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting Technologies, LLC.
All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change without notice.