Halco LIGHTING TECHNOLOGIES

DATE: | LOCATION:

TYPE: | PROJECT:

CATALOG #:

LED Luminaires

Flushmount Oval Double Ring

- Five selectable color temperatures
- Provides a diffused, low glare light output
- 120V Triac Dimmable
- 5 year warranty

ProLED SELECT | ETL LISTED c US | CLOSET RATED | 5 YR WARRANTY

Specifications

Description

The Flushmount Oval Double Ring fixture features a classic, functional design that provides a sophisticated look to the application without sacrificing efficiency. This high performing product features five selectable color temperatures, a low glare output and is Triac dimmable. This Flushmount Oval Double Ring is available in a 32 inch oval and complements any decorative residential or commercial application.

Performance

- Selectable Color Temperatures 2700K, 3000K, 3500K, 4500K, 5000K
- 80+ CRI
- L70 Lumen Maintenance > 50,000 Hours
- 120VAC, 50/60Hz Triac Dimming Driver
- Suitable for Use in Closets When Installed in Accordance with NFPA 70, NEC Section 410.16 (A)(3) and 410.16 (C)(5)
- 5 Year Limited Warranty

Construction

- Robust Steel Housing - White finish
- Diffused Polycarbonate Lens
- Driver on board
- CCT Selection Switch on LED Board
- Simple Installation

Certifications

- ETL Listed for Damp Locations

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612 | Fax 800.880.0822 | halcolighting.com | Atlanta | Chicago | Cleveland | Houston | Phoenix © 2025 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change

Halco LIGHTING TECHNOLOGIES

DATE: | LOCATION:

TYPE: | PROJECT:

CATALOG #:

LED Luminaires

Flushmount Oval Double Ring

Product Description Ordering Logic EX: FM-OV32-CS-BN-120V

Series		Design		Product Size		CCT		Finish		Voltage
FM = Flushmount	–	**OV =** Oval	–	**32 =** 32 inch	–	**CS =** Color Selectable 2700K/3000K/3500K/ 4000K/5000K	–	**BN =** Brushed Nickel	–	**120V =** 120V, 50/60 Hz, Triac Dimming

* For Options and Non-Stock Items - Lead Times Apply

Ordering Information

Product SKU	Product Code	Product Description
90335	FM-OV32-CS-BN-120V	Flush Mount Large Oval Brushed Nickel Double Ring 32" Selectable CCT 27/30/35/40/50K 50W 3500LM 120V TRIAC Dimming White Plastic Lens

Performance Table

		2700K		3000K		3500K		4000K		5000K	
Product Code	**Wattage**	**Lumen Output (lm)**	**Efficacy (lm/W)**	**Lumen Output (lm)**	**Efficacy (lm/W)**	**Lumen Output (lm)**	**Efficacy (lm/W)**	**Lumen Output (lm)**	**Efficacy (lm/W)**	**Lumen Output (lm)**	**Efficacy (lm/W)**
FM-OV32-CS-BN-120V	50	3687	79	3908	84	4077	89	4070	88	3732	79

Specifications Table

	FM-OV32-CS-BN-120V
Nominal Wattage	50W
Delivered Lumens	3500lm
Efficacy (lm/W)	70LPW
CCT	Selectable - 2700K, 3000K, 3500K, 4000K, 5000K
CRI	80+
L70 Lifetime (hrs)	50,000
Voltage	120VAC
Power Factor	>0.7
Dimming	Yes (Triac)
Housing Material	Steel
Lens	Plastic
Operating Temperature	-4°F - 104°F
Listings	ETL, FCC
Environment	Damp Location
Warranty	5 years Standard

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612 | Fax 800.880.0822 | halcolighting.com | Atlanta | Chicago | Cleveland | Houston | Phoenix © 2025 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies.
All sizes and specifications are subject to change

Halco LIGHTING TECHNOLOGIES

DATE:		LOCATION:	
TYPE:		PROJECT:	
CATALOG #:			

LED Luminaires

Flushmount Oval Double Ring

Dimensions

FRONT



SIDE FACE



TOP VIEW

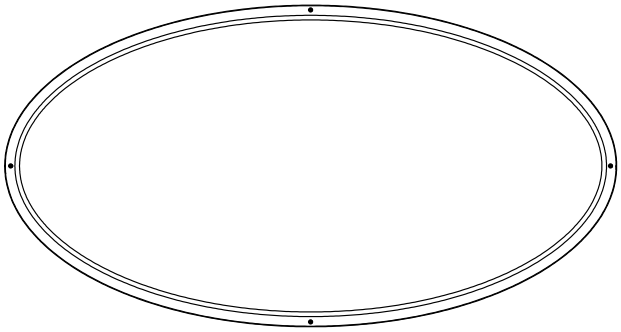

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612 | Fax 800.880.0822 | halcolighting.com | Atlanta | Chicago | Cleveland | Houston | Phoenix © 2025 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies.
All sizes and specifications are subject to change

Halco LIGHTING TECHNOLOGIES

DATE: | LOCATION:

TYPE: | PROJECT:

CATALOG #:

LED Luminaires

Flushmount Oval Double Ring

Photometric Information

90335 FM-OV32-CS-BN-120V

Zonal Lumen Summary		
Zonal	Lumens	% Fixture
0° - 10°	107	2.5%
10° - 20°	305	7.2%
20° - 30°	465	11.0%
30° - 40°	569	13.5%
40° - 50°	608	14.4%
50° - 60°	579	13.8%
60° - 70°	492	11.7%
70° - 80°	369	8.8%
80° - 90°	243	5.8%
90° - 100°	148	3.5%
100° - 110°	97	2.3%
110° - 120°	77	1.8%
120° - 130°	61	1.4%
130° - 140°	41	0.9%
140° - 150°	22	0.5%
150° - 160°	8	0.2%
160° - 170°	3	0.06%
170° - 180°	1	0.02%
0° - 90°	3738	89.0%
90° - 180°	458	10.9%
0° - 180°	4195	100.0%

FM-OV32-CS-BN-120V Set to 4000K

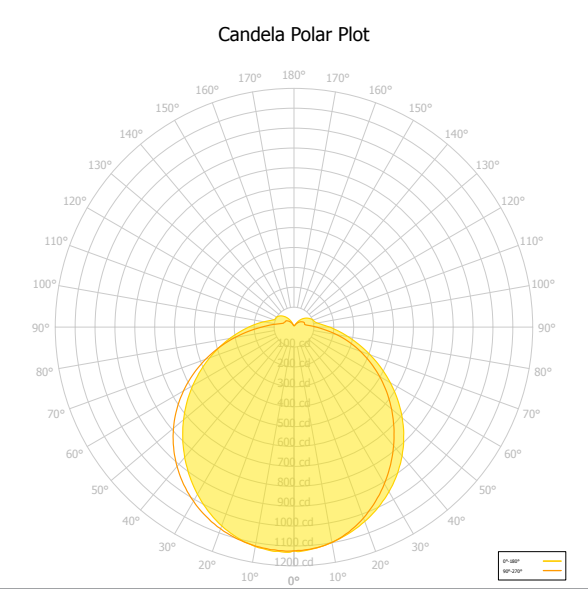

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612 | Fax 800.880.0822 | halcolighting.com | Atlanta | Chicago | Cleveland | Houston | Phoenix © 2025 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies.
All sizes and specifications are subject to change