



## LED LAMPS

### **ProLED®** **GU24 A19 Omnidirectional Series**



Omnidirectional



Enclosed Rated

ProLED® GU24 Omnidirectional A-Shape Series lamps offer an economical and even more energy efficient alternative to non-dimmable compact fluorescent lamps



**Omnidirectional Optical Design Provides 230° Light Distribution**

**UL Listed for Damp Location & Enclosed Luminaires**

**Backed by a 3-Year Warranty**

**Applications:**

Home  
Education  
Hospitality  
Retail

**Markets:**

Residential  
Commercial

Contact Your Customer Care Specialist  
For Pricing, Orders And Technical Support.

800.677.3334 [www.halcolighting.com](http://www.halcolighting.com)

ProLED®

GU24 A19 Omnidirectional Series


Product #: \_\_\_\_\_ Type: \_\_\_\_\_

Project: \_\_\_\_\_ Date: \_\_\_\_\_


Comments: \_\_\_\_\_ Initials: \_\_\_\_\_

Specifications

- Available in 2700K, 3000K, 4000K or 5000K CCT
- UL Listed for damp location and enclosed luminaires
- 230° degree beam angle creates uniform distribution of light
- 3-year warranty
- Rated for ICAT fixtures
- Non-Dimmable

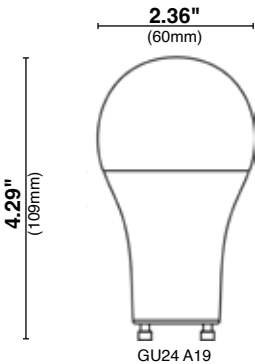

Savings Comparison

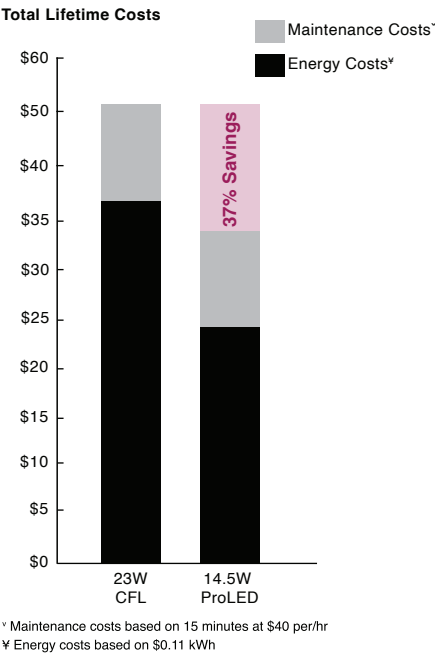

Ordering Information



Watts	Base	Product #	Product Code	Volts	Color Temp.	CRI	Lumens	Useful Life*	Beam Angle	Pkg. Qty.	MOL	Equivalent CFL Wattage
9	GU24 Base	83080	A19FR9/827/OMNI/GU24/LED	120	2700K	82	800	15,000	230°	1/6	4.29"	13
9	GU24 Base	83081	A19FR9/830/OMNI/GU24/LED	120	3000K	82	800	15,000	230°	1/6	4.29"	13
9	GU24 Base	83082	A19FR9/840/OMNI/GU24/LED	120	4000K	82	800	15,000	230°	1/6	4.29"	13
9	GU24 Base	83083	A19FR9/850/OMNI/GU24/LED	120	5000K	82	800	15,000	230°	1/6	4.29"	13
11	GU24 Base	83084	A19FR11/827/OMNI/GU24/LED	120	2700K	82	1100	15,000	230°	1/6	4.29"	18
11	GU24 Base	83085	A19FR11/830/OMNI/GU24/LED	120	3000K	82	1100	15,000	230°	1/6	4.29"	18
11	GU24 Base	83086	A19FR11/840/OMNI/GU24/LED	120	4000K	82	1100	15,000	230°	1/6	4.29"	18
14.5	GU24 Base	83087	A19FR14/827/OMNI/GU24/LED	120	2700K	82	1600	15,000	230°	1/6	4.29"	23
14.5	GU24 Base	83088	A19FR14/830/OMNI/GU24/LED	120	3000K	82	1600	15,000	230°	1/6	4.29"	23
14.5	GU24 Base	83089	A19FR14/840/OMNI/GU24/LED	120	4000K	82	1600	15,000	230°	1/6	4.29"	23

\* Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to burn past this point, but at decreased light levels

Warranty – Commercial / Industrial: This product is warranted for 3 years from the date of purchase. 25,000 hour useful life rating is based on a maximum ambient temperature of 45°C. Exceeding this ambient temperature rating may result in reduced life.

Halco Lighting Technologies 2940 Pacific Drive I Norcross, GA 30071 I Toll Free 800.677.3334 I Phone 770.242.3612 I Fax 800.880.0822 I halcolighting.com I Atlanta I Cleveland I Houston I Los Angeles I Phoenix

© 2024 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change. 082724 Re-order #9117