



## LED LAMPS

### **ProLED®** Reflector Series



Dimmable



25,000 Hour Life



Energy Saving

ProLED® Reflector lamps illuminate an atmosphere like Incandescent with long life and energy savings



**Multipack Available**

**UL Listed for Damp Locations**

**Approved for use in ICAT Rated Luminaires**

#### **Applications:**

Downlighting  
Education  
Healthcare  
Hospitality  
Office  
Retail

#### **Markets:**

Residential  
Commercial

# ProLED<sup>®</sup>

## Reflector Series


Product #: \_\_\_\_\_ Type: \_\_\_\_\_

Project: \_\_\_\_\_ Date: \_\_\_\_\_


Comments: \_\_\_\_\_ Initials: \_\_\_\_\_

### Specifications

- 8W BR30 is 87% more efficient than 65W Incandescent lamp<sup>1</sup>
- 2700K, 3000K, 4000K & 5000K CCTs & pink provide consistent lamp-to-lamp color
- Dimmable to 5% for design flexibility
- Smooth-sided lightweight construction with full lens for even illumination from lamp
- 5 Year Limited Warranty for 25,000 hour lamps
- 3 Year Limited Warranty for 15,000 hour lamps

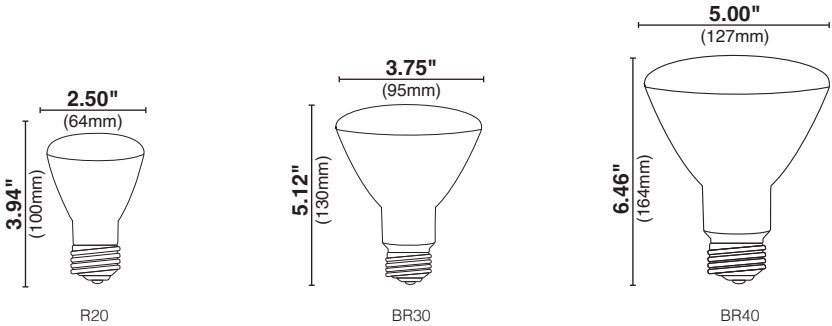

### Savings Comparison

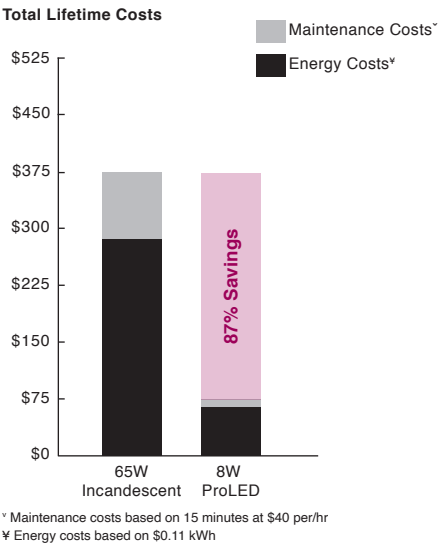

### Ordering Information



Watt	Base	Product #	Product Code	Description	Volts	Color Temp.	CRI	Lumens	Useful Life*	Pkg. Qty.	MOL	Equivalent Wattage
BR30												
8	Medium	80990	BR30FL8/827/ECO/LED	Reflector •	120	2700K	82	650	25,000	1/6	5.12"	65
8	Medium	80991	BR30FL8/830/ECO/LED	Reflector •	120	3000K	82	650	25,000	1/6	5.12"	65
8.5	Medium	80166	BR30FL9/PNK/LED	Reflector •	120	Pink	82	-	40,000	1/6	5.12"	65
9.5	Medium	80976	BR30FL10/827/LED	Reflector •	120	2700K	82	750	25,000	1/6	5.12"	65
9.5	Medium	80977	BR30FL10/830/LED	Reflector •	120	3000K	82	750	25,000	1/6	5.12"	65
9.5	Medium	80978	BR30FL10/840/LED	Reflector •	120	4000K	82	750	25,000	1/6	5.12"	65
9.5	Medium	80979	BR30FL10/850/LED	Reflector •	120	5000K	82	750	25,000	1/6	5.12"	65
BR40												
11.5	Medium	80981	BR40FL11/827/LED	Reflector •	120	2700K	82	940	25,000	1/6	6.46"	75
11.5	Medium	80980	BR40FL11/830/LED	Reflector •	120	3000K	82	940	25,000	1/6	6.46"	75
16.5	Medium	80983	BR40FL16/827/LED	Reflector •	120	2700K	82	1200	25,000	1/6	6.46"	85
16.5	Medium	80982	BR40FL16/830/LED	Reflector •	120	3000K	82	1200	25,000	1/6	6.46"	85
16.5	Medium	80984	BR40FL16/840/LED	Reflector •	120	4000K	82	1200	25,000	1/6	6.46"	85
16.5	Medium	80985	BR40FL16/850/LED	Reflector •	120	5000K	82	1200	25,000	1/6	6.46"	85
R20												
6.5	Medium	80989	R20FL6/827/LED	Reflector •	120	2700K	82	525	25,000	1/6	3.94"	50
6.5	Medium	80986	R20FL6/830/LED	Reflector •	120	3000K	82	525	25,000	1/6	3.94"	50
6.5	Medium	81164	R20FL6/840/LED	Reflector •	120	4000K	82	525	25,000	1/6	3.94"	50
6.5	Medium	80987	R20FL6/850/LED	Reflector •	120	5000K	82	525	25,000	1/6	3.94"	50

\* Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to burn past this point, but at decreased light levels.  
Warranty – Commercial / Industrial: This product is warranted for 3 years from the date of purchase.  
Not for use in enclosed fixtures.  
• May not be compatible with all dimming systems, dimming performance may vary by system, please check the website [www.halcolighting.com/ProLEDdim](http://www.halcolighting.com/ProLEDdim) for up-to-date dimmer compatibility information. Use on incompatible systems may shorten lamp life. Lamps should be tested in the application for compatibility prior to full installations on circuits using such devices.  
<sup>1</sup> Energy savings based on \$0.11 kWh over 40,000 hour life.  
<sup>‡</sup> While supplies last.