

Halco ProLED Select Direct Fit Gimbal Installation Guide



Please consult a qualified electrician for hanging fixture and wiring.

CAUTION: Before starting the installation, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box. Carefully unpack and identify all parts before assembly

1. Using measurement to confirm the fixture installation hole, then make a hole in the ceiling, as figure 1

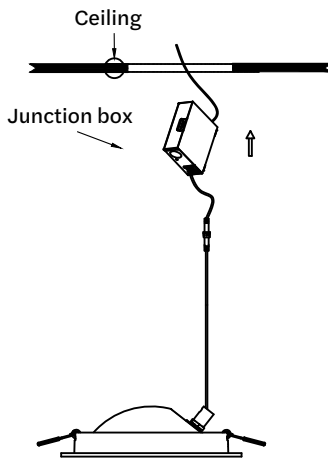


Figure 1

3. Pushing the fixture to the ceiling hole, and make sure well fixed.

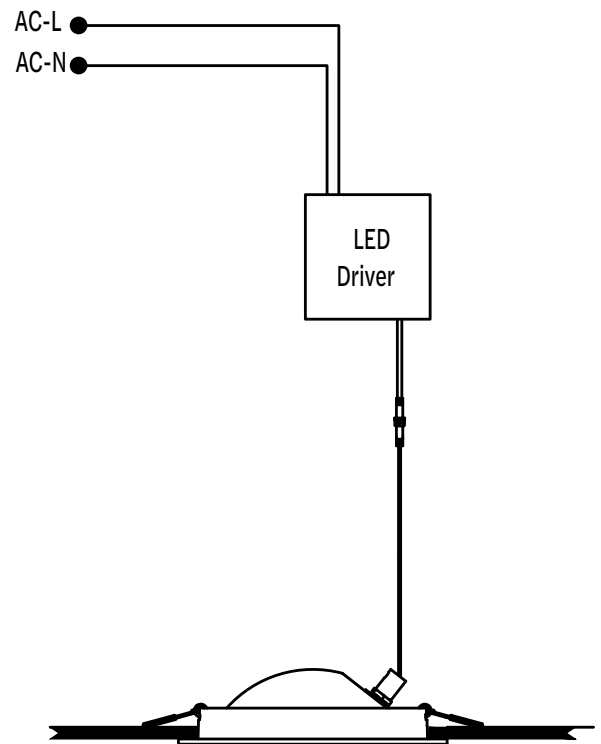


Figure 3

2. Connecting the wire as figure 2 and make sure insulation protection, then pull the fixture spring in vertical direction.

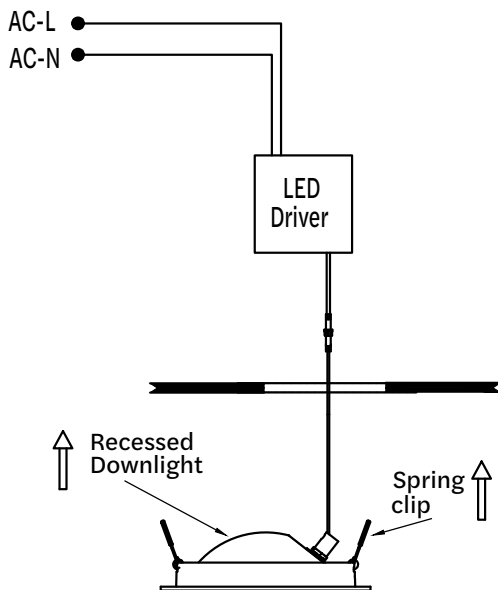


Figure 2