



LED LAMPS

ProLED[®] **Omnidirectional A-Shape Series**



Dimmable



Omnidirectional



Enclosed Rated



ENERGY STAR[®]

ProLED[®] Omnidirectional A-Shape Series dimmable lamps feature superior thermal construction for long life and energy efficient illumination



Omnidirectional Optical Design Provides 230° Light Distribution

UL Listed for Damp Location & Enclosed Fixtures

ENERGY STAR[®] Certified

Backed by a 3-Year Warranty

Applications:

- Home
- Education
- Healthcare
- Hospitality
- Retail

Markets:

- Residential
- Commercial




Contact Your Customer Care Specialist For Pricing, Orders And Technical Support.
800.677.3334 www.halcolighting.com

ProLED® Omnidirectional A-Shape Series


Product #: _____ Type: _____
 Project: _____ Date: _____
 Comments: _____ Initials: _____

Specifications

- Available in 2700K, 3000K, 4000K or 5000K CCT
- UL Listed for damp location
- Dimmable to 10% for design flexibility (excludes 3-way lamps)
- 220° degree beam angle creates uniform distribution of light
- 3-year warranty
- 80196, 80197, 80198, 80199: This product is warranted for 5 years from date of purchase
- Rated for ICAT fixtures

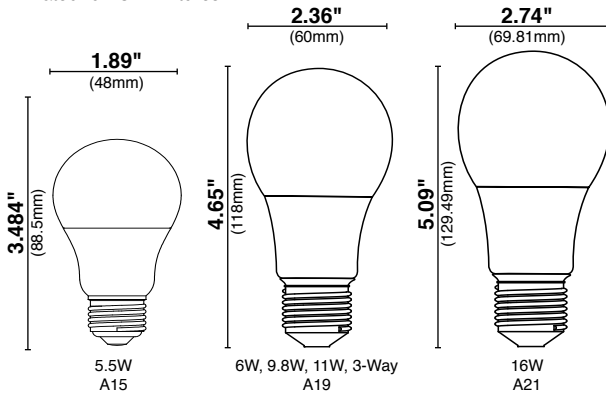

Savings Comparison

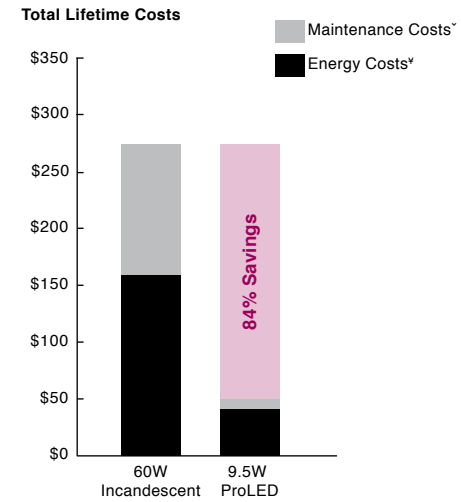

* Maintenance costs based on 15 minutes at \$40 per/hr
 † Energy costs based on \$0.11 kWh



Ordering Information

	Watt	Base	Product #	Product Code	Volts	Color Temp.	CRI	Lumens	Useful Life*	Beam Angle	Pkg. Qty.	MOL	Equivalent Wattage
A15													
⊕	5.5W	Medium	80196•	A15FR5/827/OMNI2/LED	120	2700K	82	450	25,000	230°	1/6	3.484"	40
⊕	5.5W	Medium	80197•	A15FR5/830/OMNI2/LED	120	3000K	82	450	25,000	230°	1/6	3.484"	40
⊕	5.5W	Medium	80198•	A15FR5/840/OMNI2/LED	120	4000K	82	450	25,000	220°	1/6	3.484"	40
⊕	5.5W	Medium	80199•	A15FR5/850/OMNI2/LED	120	5000K	82	450	25,000	220°	1/6	4.484"	40
A19													
⊕	6W	Medium	84965	A19FR6/827/OMNI3/LED	120	2700K	82	480	15,000	220°	1/6	4.33"	40
⊕	6W	Medium	84966	A19FR6/830/OMNI3/LED	120	3000K	82	480	15,000	220°	1/6	4.33"	40
⊕	9.8W	Medium	84967	A19FR9/827/OMNI3/LED	120	2700K	82	800	15,000	220°	1/6	4.33"	60
⊕	9.8W	Medium	84968	A19FR9/830/OMNI3/LED	120	3000K	82	800	15,000	220°	1/6	4.33"	60
⊕	9.8W	Medium	84969	A19FR9/840/OMNI3/LED	120	4000K	82	800	15,000	220°	1/6	4.33"	60
⊕	9.8W	Medium	84970	A19FR9/850/OMNI3/LED	120	5000K	82	800	15,000	220°	1/6	4.33"	60
⊕	11W	Medium	84971	A19FR11/827/OMNI3/LED	120	2700K	82	1100	15,000	220°	1/6	4.33"	75
⊕	11W	Medium	84972	A19FR11/830/OMNI3/LED	120	3000K	82	1100	15,000	220°	1/6	4.33"	75
A21													
⊕	16W	Medium	84973	A21FR16/827/OMNI3/LED	120	2700K	82	1600	15,000	220°	1/6	5.09"	100
⊕	16W	Medium	84974	A21FR16/830/OMNI3/LED	120	3000K	82	1600	15,000	220°	1/6	5.09"	100
⊕	16W	Medium	84975	A21FR16/840/OMNI3/LED	120	4000K	82	1600	15,000	220°	1/6	5.09"	100
⊕	16W	Medium	84976	A21FR16/850/OMNI3/LED	120	5000K	82	1600	15,000	220°	1/6	5.09"	100
3-Way													
⊕	3/9/12	Medium	83191	A19FR3/9/12/830/3-WAY/LED	120	3000K	82	280/950/1200	15,000	220°	1/6	4.646	30/70/100

⊕ NEW ITEM!

* Not rated for enclosed fixtures.

* Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to burn past this point, but at decreased light levels.

Represents lamps that are ENERGY STAR® certified.

Warranty – Commercial / Industrial: This product is warranted for 3 years from the date of purchase.

May not be compatible with all dimming systems, dimming performance may vary by system, please check the website www.halcolighting.com/ProLEDdim for up-to-date dimmer compatibility information. Use on incompatible systems may shorten lamp life. 25,000 hour useful life rating is based on a maximum ambient temperature of 45°C. Exceeding this ambient temperature rating may result in reduced life.