

Report No.:

Test Time: 2023/12/5 星期二 05:29

Luminaire Property

Luminaire Manufacturer:

Voltage: 120.1 V

Power: 50.71 W

Current: 0.428 A

Power Factor: 0.986

Photometric Results

IES Classification: Type III

Total Rated Lamp Lumens: 6509.1 lm

Efficiency: 100%

Upward Ratio: 6%

Central Intensity: 1469.96 cd

Pos of Max. Intensity: H90 V40

Longitudinal Classification: Very Short


Measurement Flux: 6509.1 lm

Downward Ratio: 94%


Luminaire Efficacy Rating (LER): 128.41

Max. Intensity: 4068.6 cd

Picture Of Luminaire



Luminous Intensity Distribution Curve

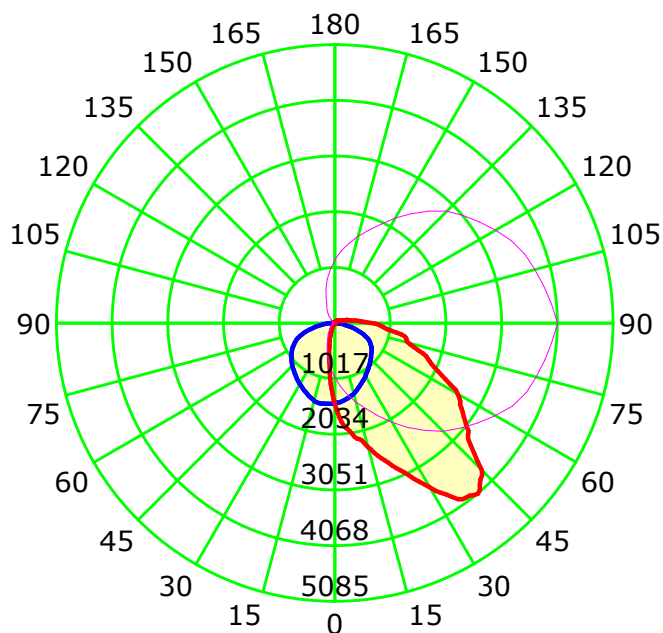

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: GPM-1800B

Distance: 8.190 m

Humidity:

Inspector:


Luminous Intensity Distribution Curve

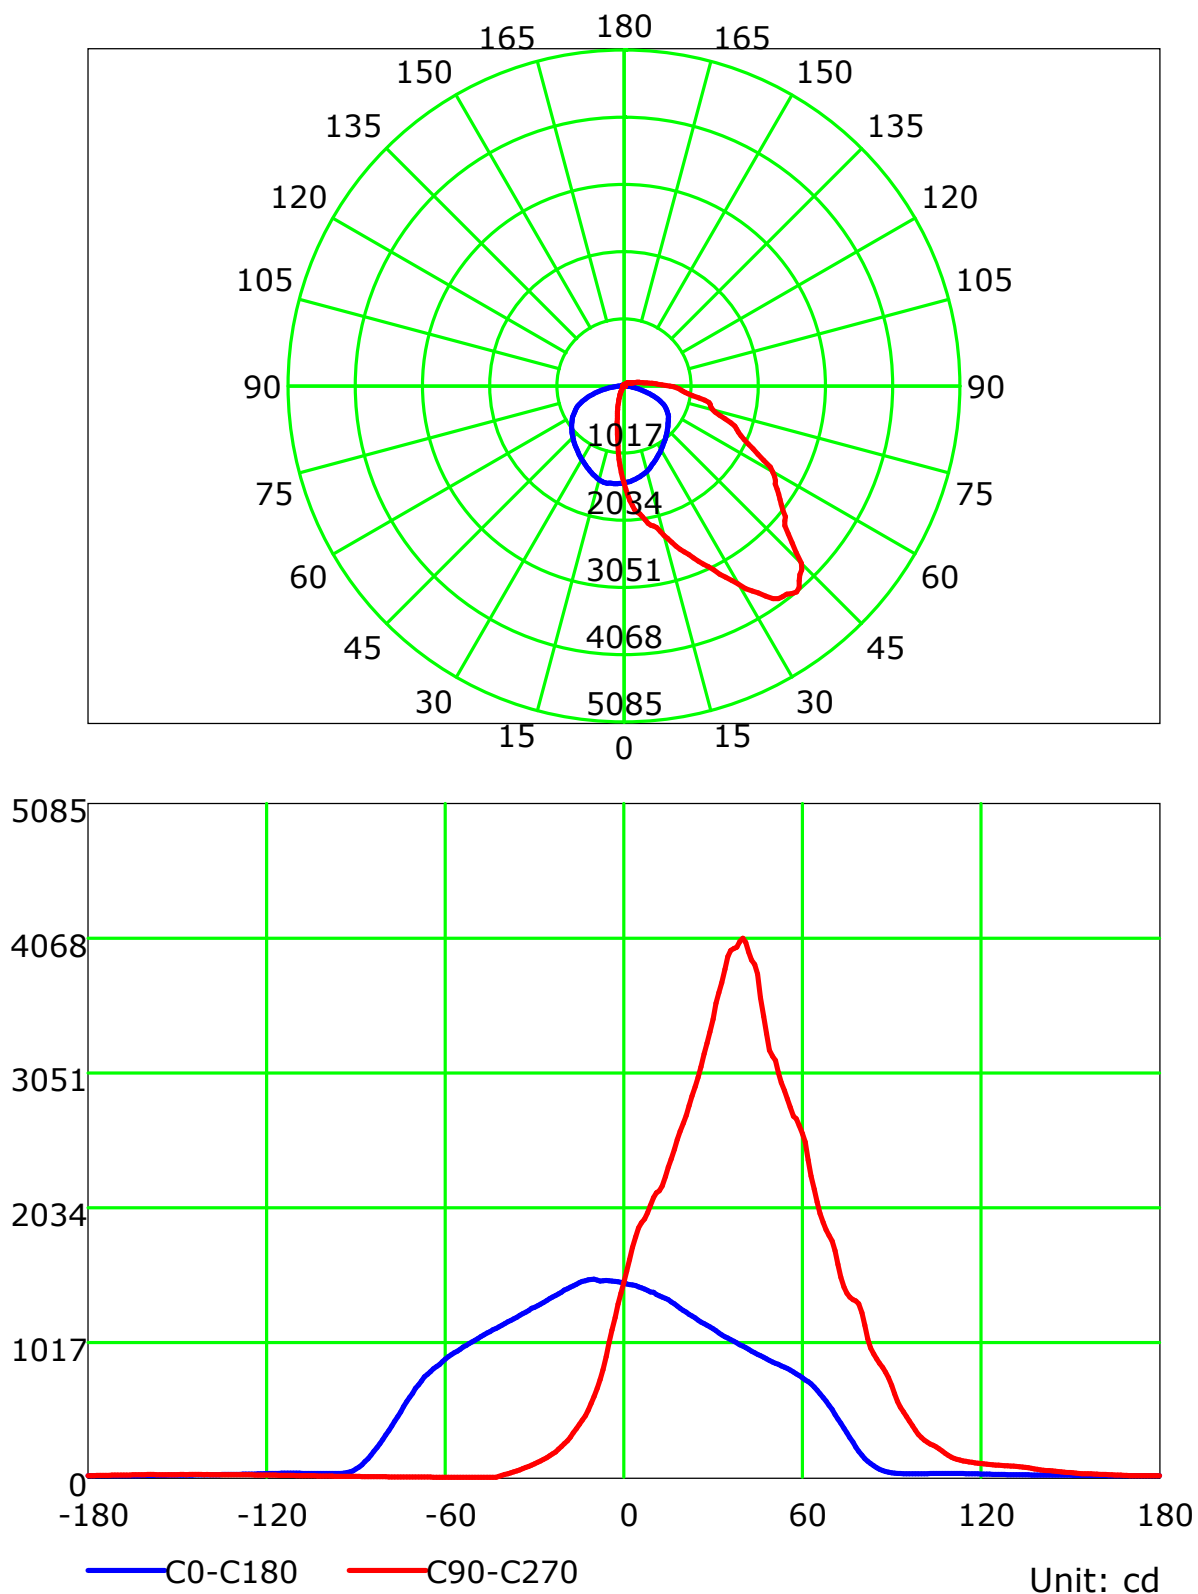

C Plane (°):0.0-360.0: 22.5
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1800B
Distance: 8.190 m
Humidity:
Inspector:

Luminous Intensity Distribution Curve(cd/klm)

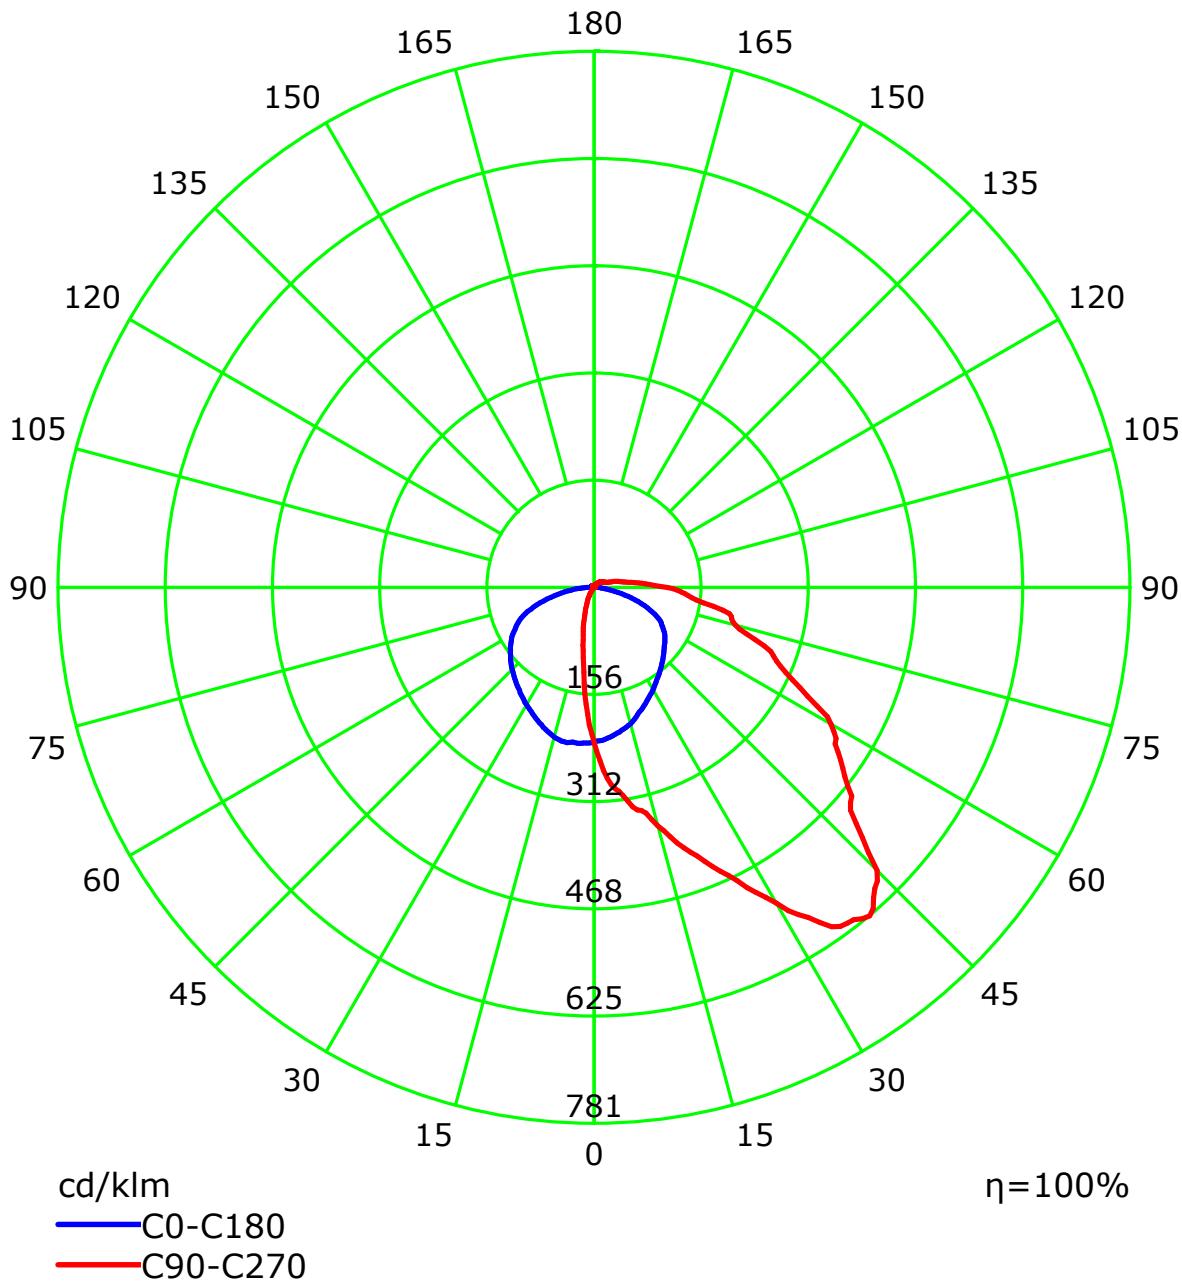

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 8.190 m


Humidity:

Inspector:

Coefficients Of Utilization - Zonal Cavity Method

RC	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.5	0.5	0.5	0.3	0.3	0.3	0.1	0.1	0.1	0
RW	0.7	0.5	0.3	0.1	0.7	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0
RCR	RF = 0.2																	
0	118	118	118	118	114	114	114	114	108	108	108	102	102	102	96	96	96	94
1	105	99	94	90	102	96	92	87	91	87	84	86	83	80	81	79	76	74
2	94	85	77	70	91	82	75	69	78	72	67	73	68	64	69	65	62	59
3	85	73	64	57	82	71	63	56	67	60	54	64	58	52	60	55	51	48
4	77	64	54	47	74	62	53	46	59	51	45	56	49	44	53	47	43	40
5	71	57	47	40	68	55	46	39	52	44	38	50	43	37	47	41	36	34
6	65	51	41	34	62	49	40	34	47	39	33	44	37	32	42	36	31	29
7	60	45	36	30	58	44	35	29	42	34	29	40	33	28	38	32	27	25
8	55	41	32	26	53	40	32	26	38	31	25	37	30	25	35	29	24	22
9	52	37	29	23	50	37	28	23	35	28	22	33	27	22	32	26	21	19
10	48	34	26	21	47	34	26	20	32	25	20	31	24	20	30	24	19	17


Spacing Criteria (0-180): 1.22
Spacing Criteria (90-270): 1.91
Spacing Criteria (Diagonal): 1.67

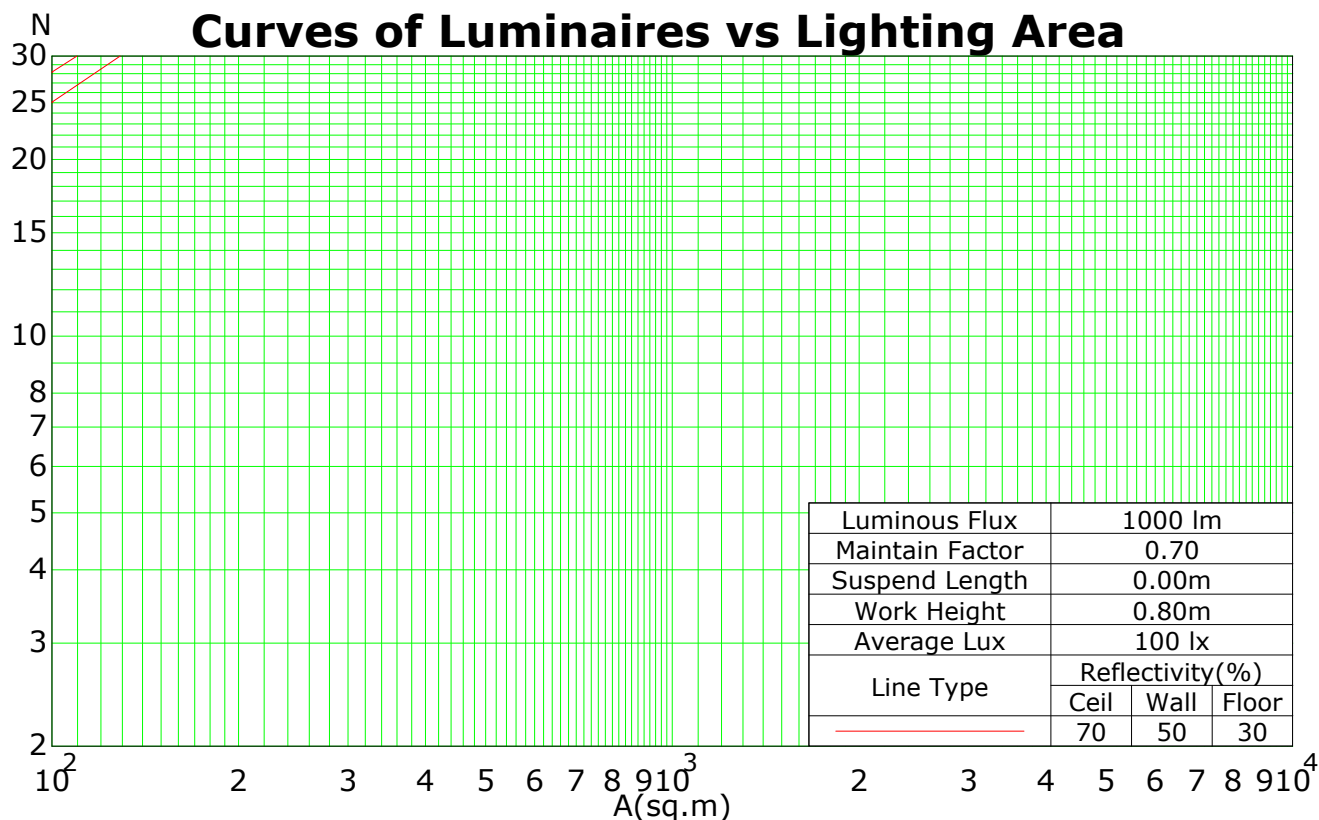

C Plane (°):0.0-360.0: 22.5
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1800B
Distance: 8.190 m
Humidity:
Inspector:

Isocandela (rectangle)

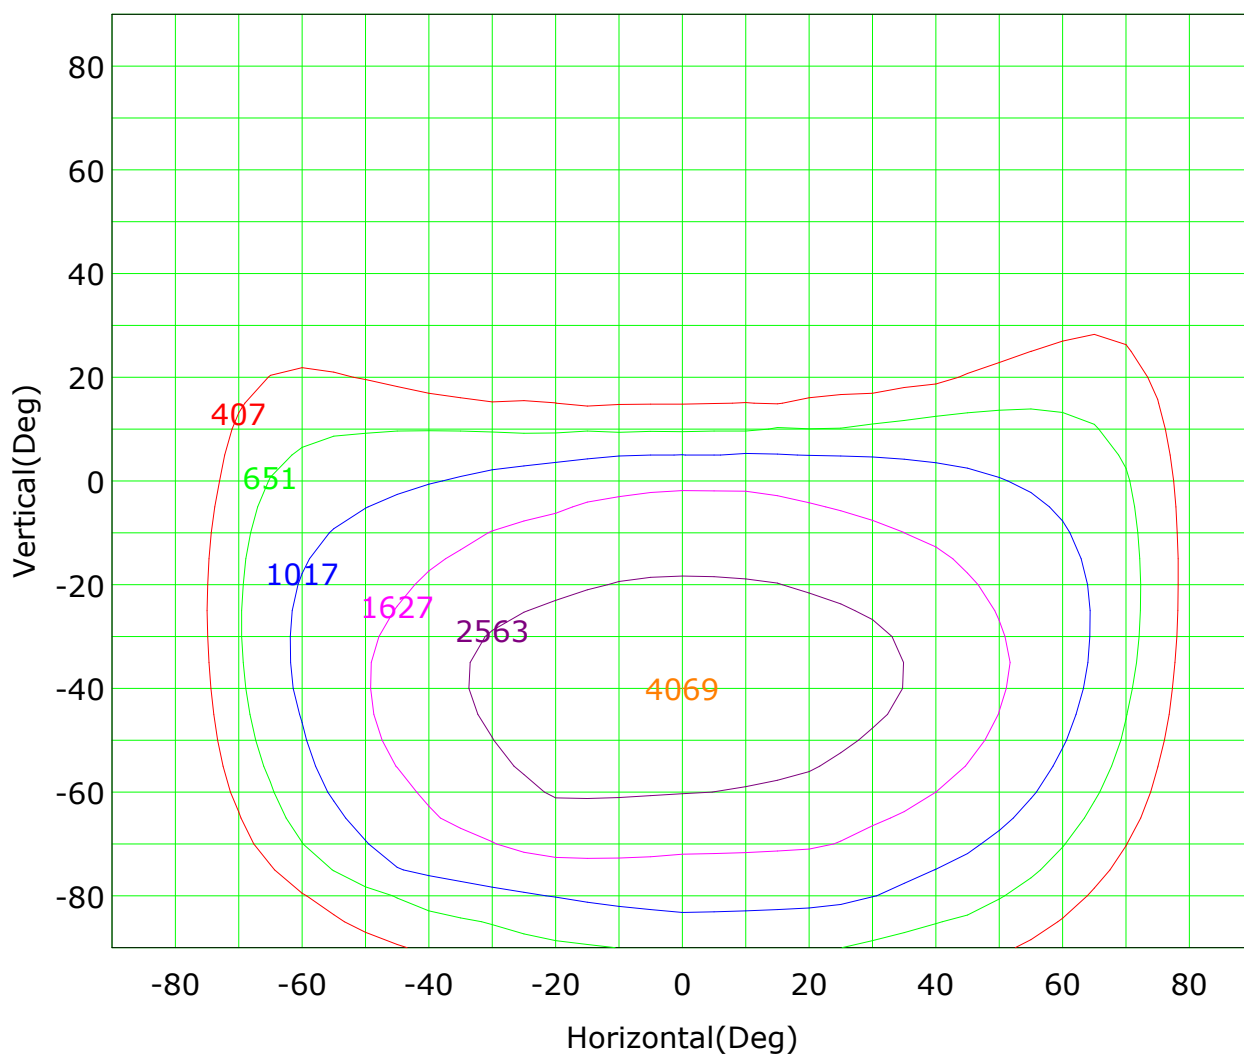

Imax (100%): 4069 cd

(10%): 407 cd	(16%): 651 cd
(25%): 1017 cd	(40%): 1627 cd
(63%): 2563 cd	(100%): 4069 cd

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: GPM-1800B

Distance: 8.190 m

Humidity:

Inspector:

Isocandela (sphere)

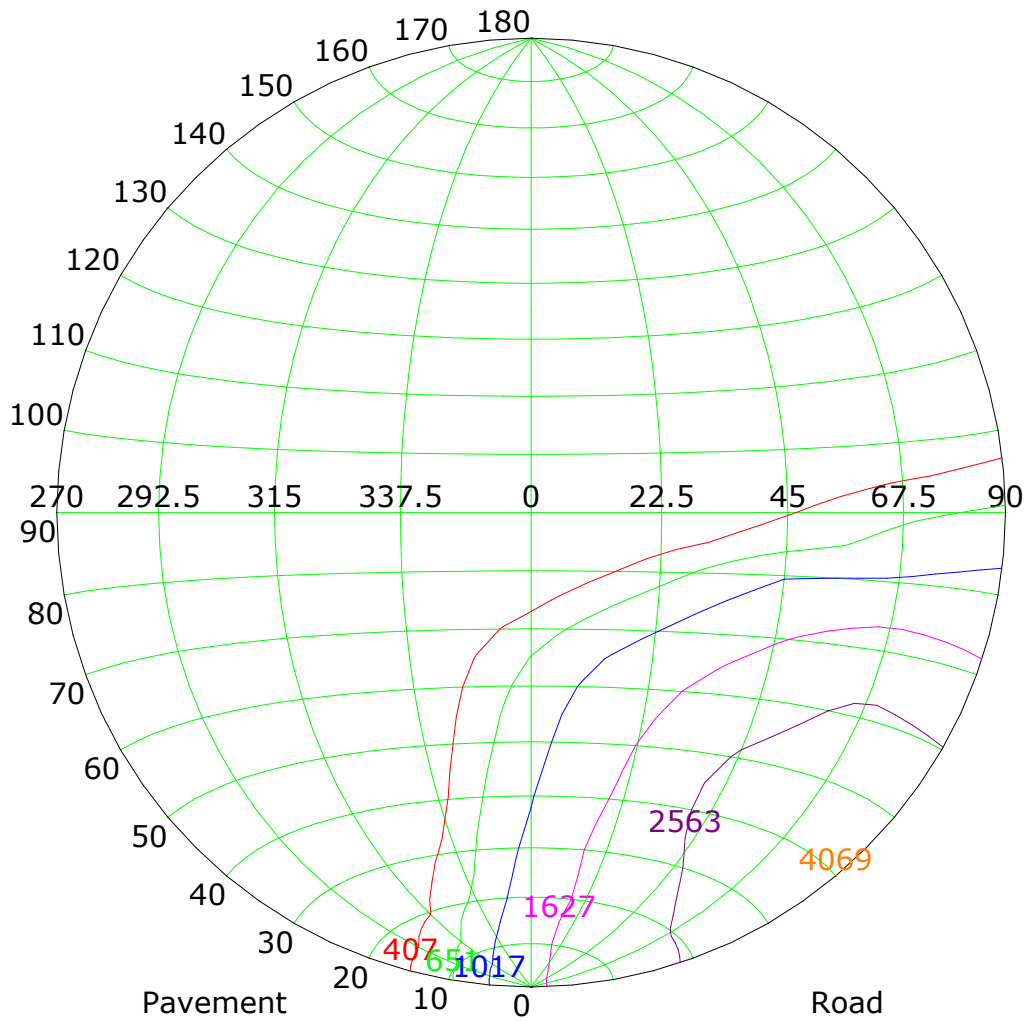

Imax (100%): 4069 cd

(10%): 407 cd	(16%): 651 cd
(25%): 1017 cd	(40%): 1627 cd
(63%): 2563 cd	(100%): 4069 cd

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: GPM-1800B

Distance: 8.190 m

Humidity:

Inspector:

IsoLux Plot

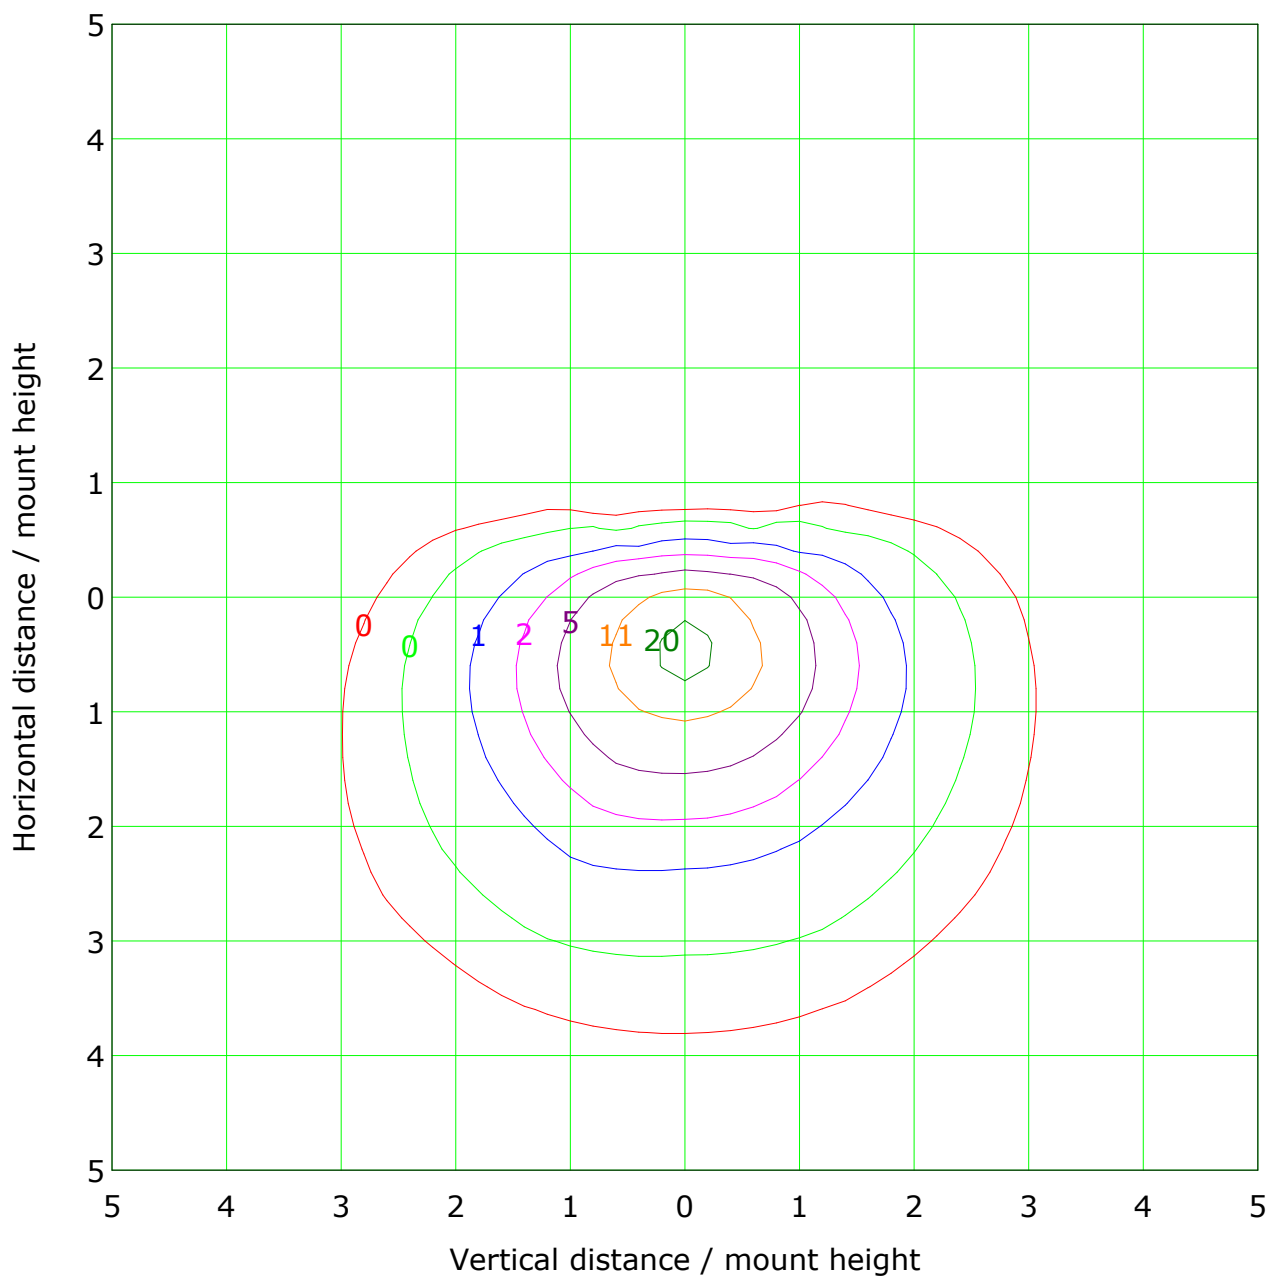

Mounting Height: 10.0m Max Lux(100%): 22.6 lx	
(1%): 0.2 lx	(2%): 0.5 lx
(5%): 1.1 lx	(10%): 2.3 lx
(20%): 4.5 lx	(50%): 11.3 lx
(90%): 20.4 lx	(100%): 22.6 lx

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B


Distance: 8.190 m

Humidity:

Inspector:

Roadway CU Curve

Efficiency(%)

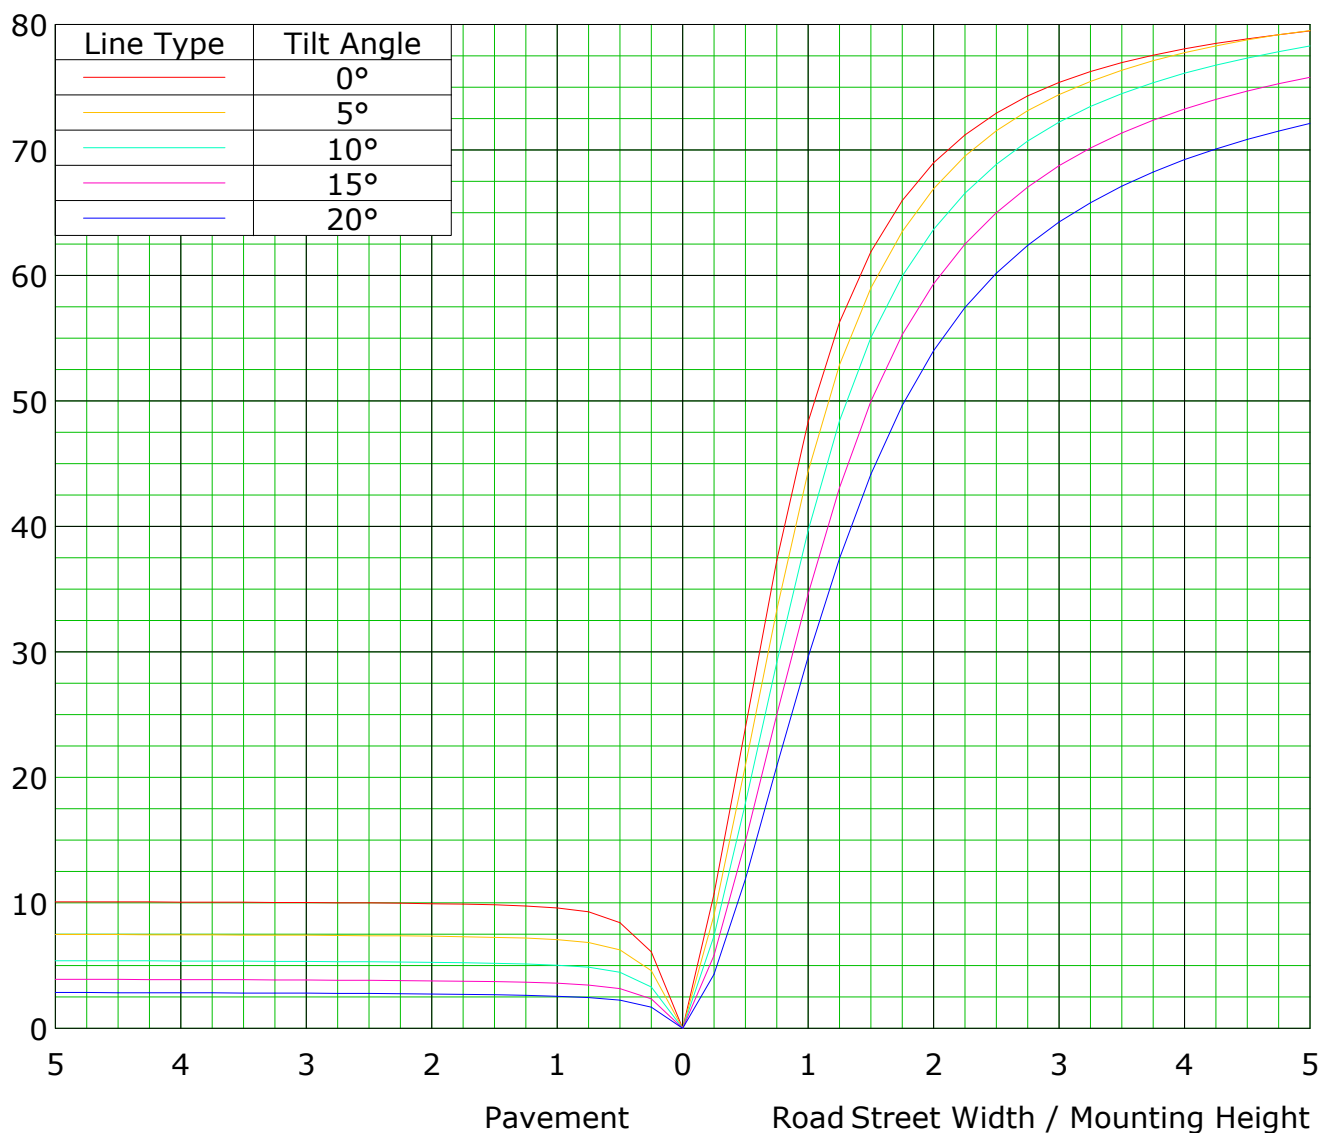

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 8.190 m



Humidity:

Inspector:

Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

a b c d e f g h

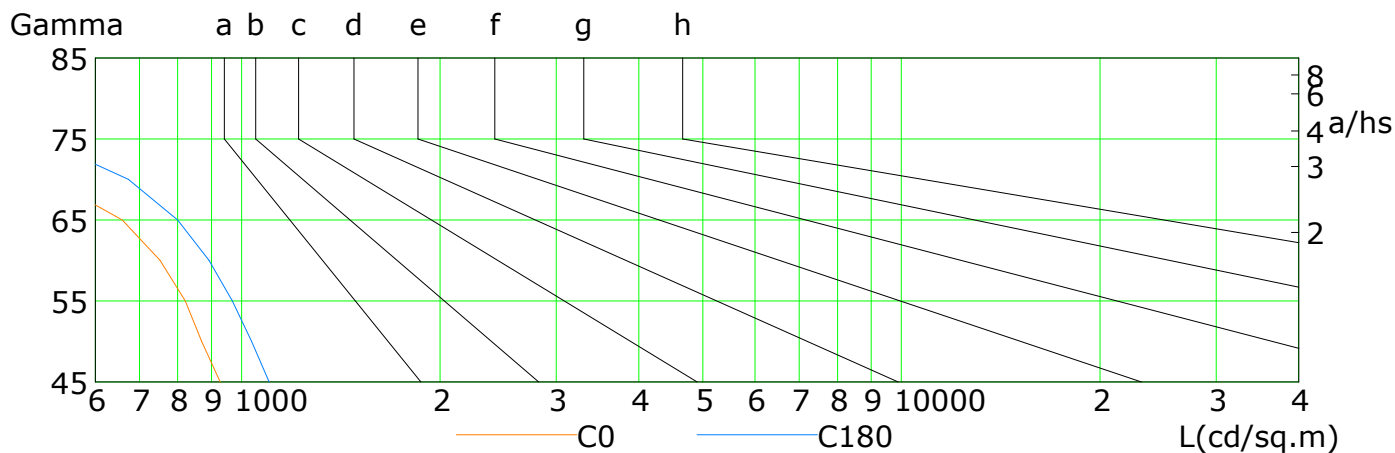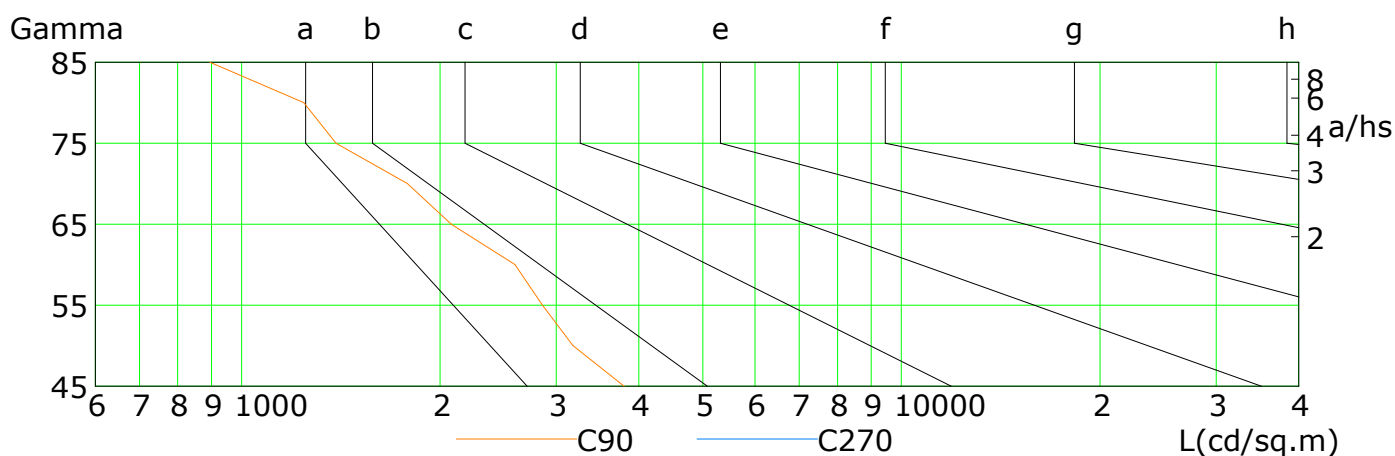


L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	928	870	822	752	659	513	337	167	73
C90	3800	3177	2857	2596	2078	1784	1390	1242	896
C180	1101	1036	969	893	800	674	495	321	168
C270	1	1	2	2	3	3	4	5	6

C Plane (°):0.0-360.0: 22.5
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1800B
Distance: 8.190 m
Humidity:
Inspector:


Illuminance at a Distance(Beam Angle)

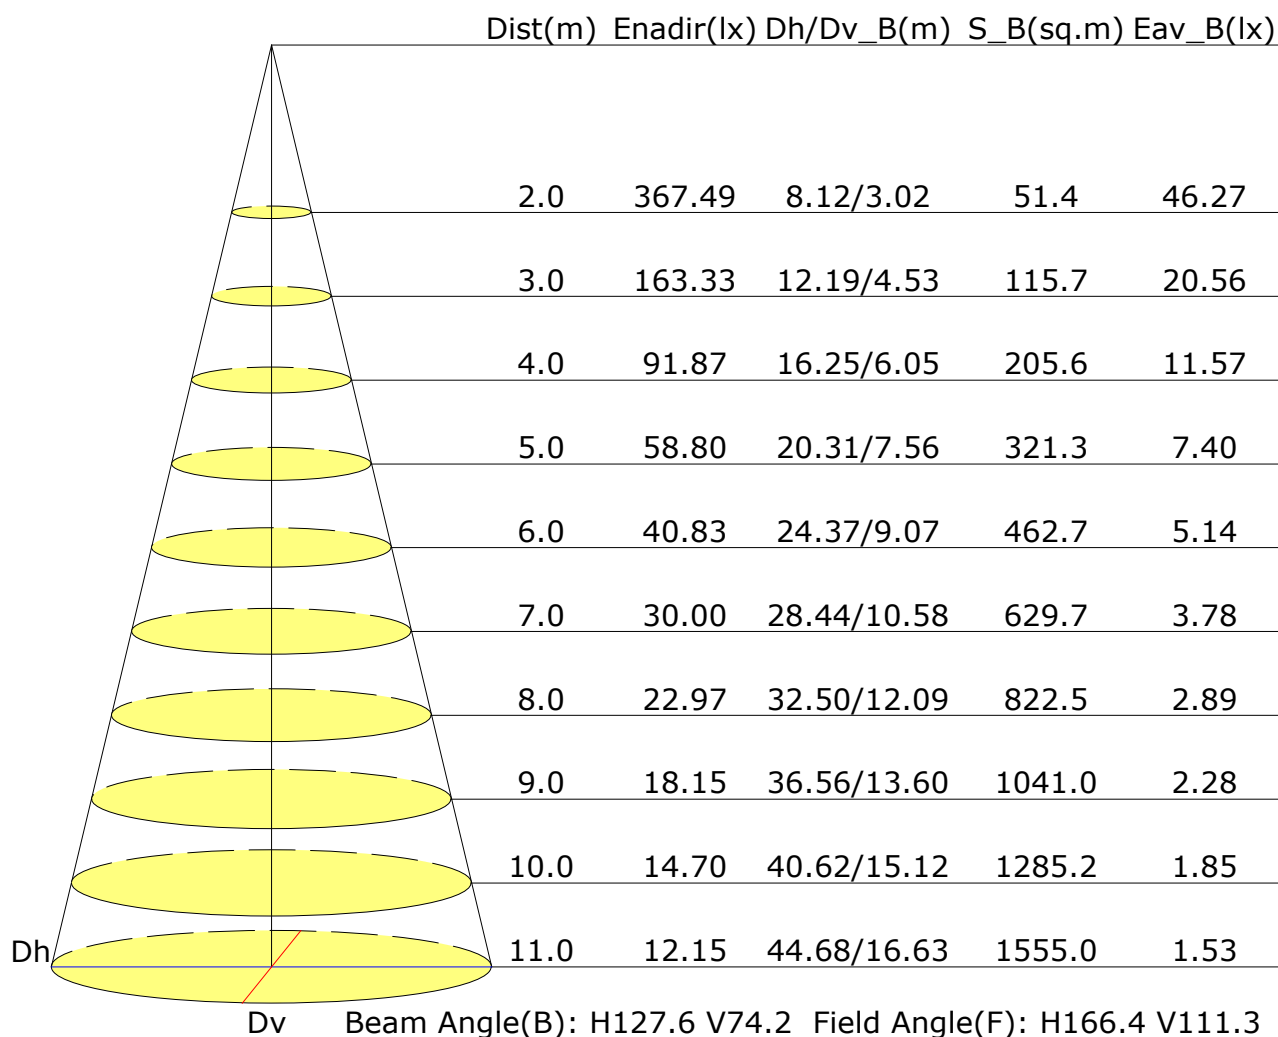

C Plane (°):0.0-360.0: 22.5
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 8.190 m
 Humidity:
 Inspector:


Illuminance at a Distance(Field Angle)

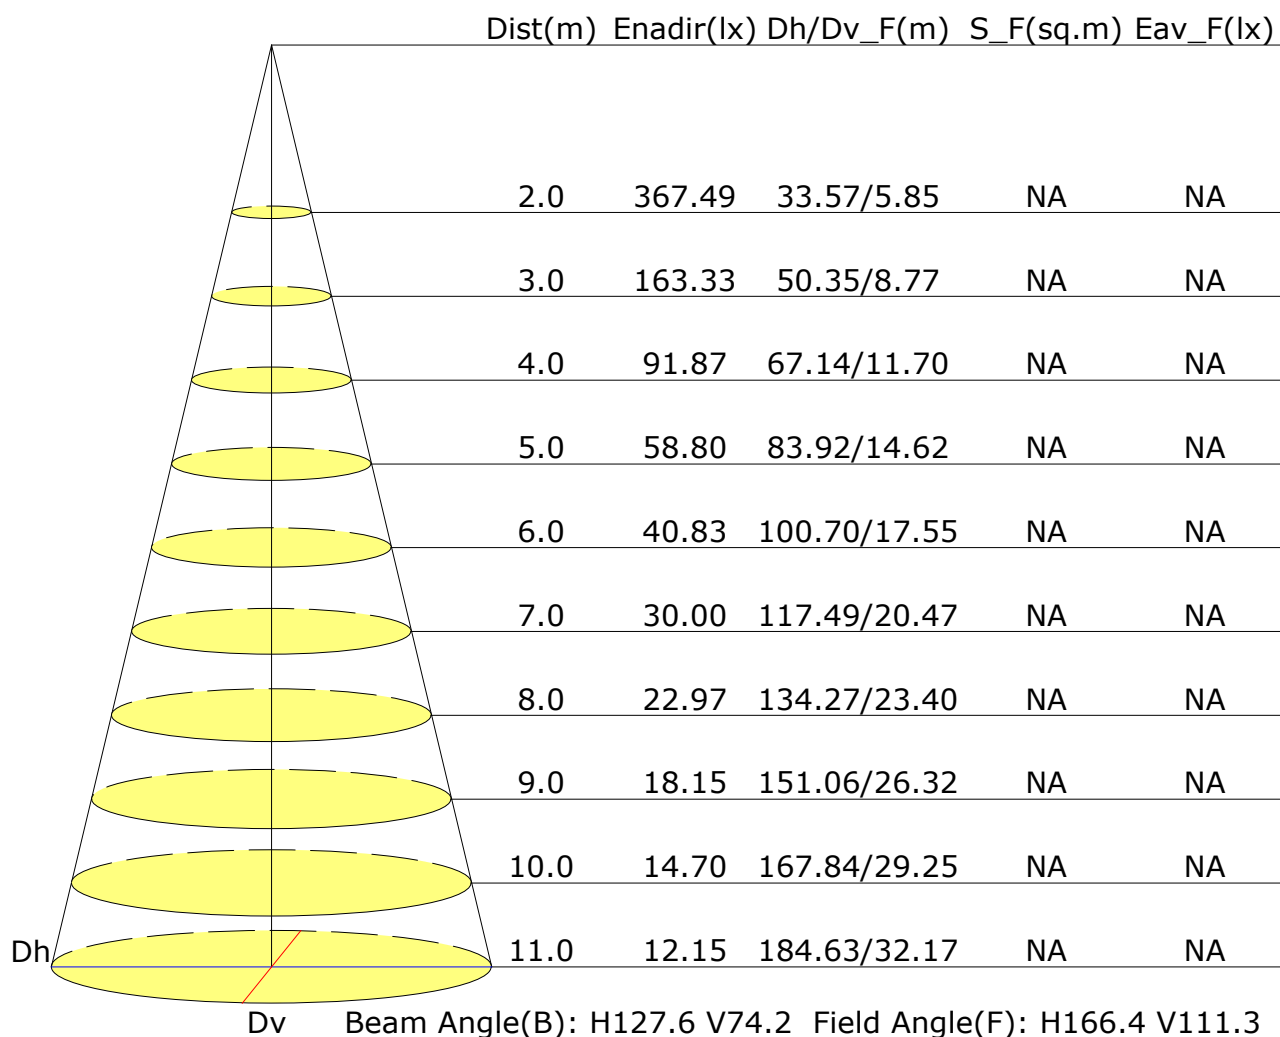

C Plane (°):0.0-360.0: 22.5
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 8.190 m
 Humidity:
 Inspector:

Vertical IsoLux Plot

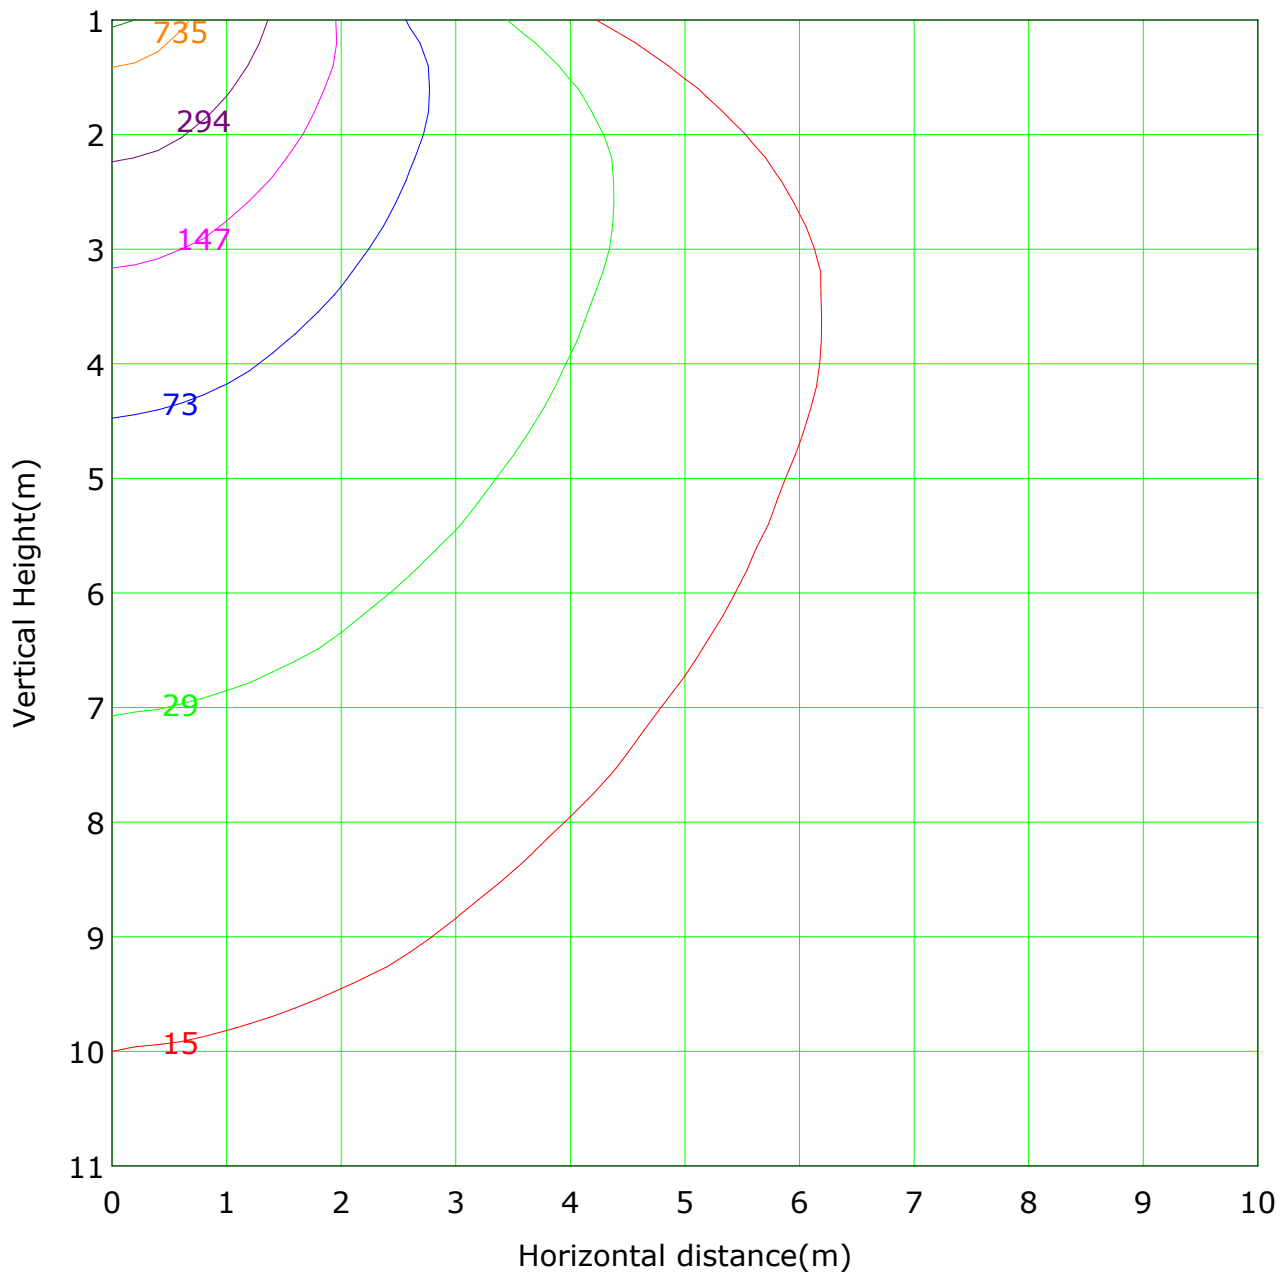

Lowest(m): 1.0m Highest(m): 11.0m Max Lux: 1470.0 lx

(1%): 14.7 lx	(2%): 29.4 lx
(5%): 73.5 lx	(10%): 147.0 lx
(20%): 294.0 lx	(50%): 735.0 lx
(90%): 1323.0 lx	(100%): 1470.0 lx

C Plane (°):0.0-360.0: 22.5
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1800B
Distance: 8.190 m
Humidity:
Inspector:

Area Flux Table

Unit: lm


Vertical plane	-90	-80	-70	-60	-50	-40	-30	-20	-10	0	10	20	30	40	50	60	70	80	90
Flux(T)	8.0	48.4	121.6	216.0	324.3	446.0	564.2	659.7	711.8	715.4	666.2	562.3	431.1	303.5	194.4	103.0	34.7	4.3	6115
Flux(E)	0.0	27.6	104.7	201.3	310.0	432.3	552.3	647.4	699.0	703.0	653.9	550.1	417.9	289.5	178.3	85.0	12.5	0.0	5865
	-90	-80	-70	-60	-50	-40	-30	-20	-10	0	10	20	30	40	50	60	70	80	90
	0.2	0.5	0.6	0.6	0.3	0.3	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.4	0.4	0.3	0.1	5.2
	0.2	0.7	0.8	0.7	0.4	0.3	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.3	0.5	0.5	0.4	0.1
	0.3	0.9	1.1	1.1	0.6	0.3	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.4	0.7	0.7	0.5	0.1
	0.3	1.3	1.6	1.6	1.1	0.4	0.2	0.1	0.1	0.0	0.1	0.2	0.3	0.8	1.1	1.1	0.7	0.1	10.9
	0.4	1.7	2.6	2.4	2.1	0.8	0.5	0.2	0.2	0.2	0.2	0.4	0.6	1.6	1.7	1.7	1.0	0.2	18.4
	0.4	2.2	4.0	3.9	3.8	2.8	1.9	1.9	1.9	1.8	1.7	1.6	2.3	3.0	3.0	2.9	1.4	0.2	40.8
	0.5	2.8	5.7	7.0	6.6	6.4	5.4	5.2	5.2	5.1	4.8	4.9	5.5	5.4	5.7	4.4	1.8	0.2	82.7
	0.5	3.3	7.6	10.9	12.6	12.7	12.7	12.6	12.6	12.4	11.9	11.6	11.1	10.6	9.1	6.1	2.2	0.3	160.7
	0.6	3.8	9.4	14.9	20.0	24.3	27.6	30.5	31.2	30.8	28.3	24.7	21.0	16.9	12.6	7.7	2.6	0.3	307.3
	0.6	4.2	11.0	18.9	27.2	35.7	43.9	51.1	55.1	54.5	48.8	40.6	32.0	23.7	16.2	9.2	3.0	0.3	476.1
	0.6	4.4	12.2	22.3	33.6	45.6	57.3	66.5	71.1	70.9	64.6	55.3	42.6	30.2	19.7	10.5	3.3	0.3	611.0
	0.6	4.4	12.8	24.8	38.9	56.5	72.6	84.9	91.2	90.8	83.3	70.0	53.4	35.7	22.3	11.2	3.4	0.3	757.1
	0.6	4.2	12.6	25.7	41.9	63.4	84.6	102.4	113.1	113.4	102.7	83.2	61.0	39.4	23.6	11.2	3.3	0.3	886.6
	0.6	3.9	11.5	24.2	40.2	60.4	79.7	97.2	108.6	109.7	100.6	81.5	59.7	39.1	22.8	10.4	3.1	0.3	853.4
	0.5	3.4	9.8	20.5	34.7	50.9	67.2	79.7	85.9	88.0	85.9	72.5	53.1	35.2	20.2	9.1	2.7	0.3	719.8
	0.5	2.8	7.9	16.2	27.3	39.2	50.9	59.5	63.8	66.2	66.4	58.2	43.1	29.2	16.6	7.3	2.2	0.3	557.7
	0.4	2.2	6.0	12.0	19.8	27.9	35.9	41.2	43.7	44.2	42.1	36.5	28.8	20.7	11.5	5.2	1.7	0.2	379.9
	0.3	1.7	4.3	8.3	13.2	18.3	23.3	26.3	27.7	27.0	24.3	20.6	15.8	11.0	6.7	3.3	1.2	0.2	233.7
	0.2	1.3	3.1	6.1	10.1	15.1	20.1	24.1	27.1	27.0	24.1	20.6	15.8	11.0	6.7	3.3	1.2	0.2	233.7

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1800B
Distance: 8.190 m
Humidity:
Inspector:

C Plane (°):0.0-360.0: 22.5
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

The Average Illuminance Effective Figure

Flux Out: 4613.13lm

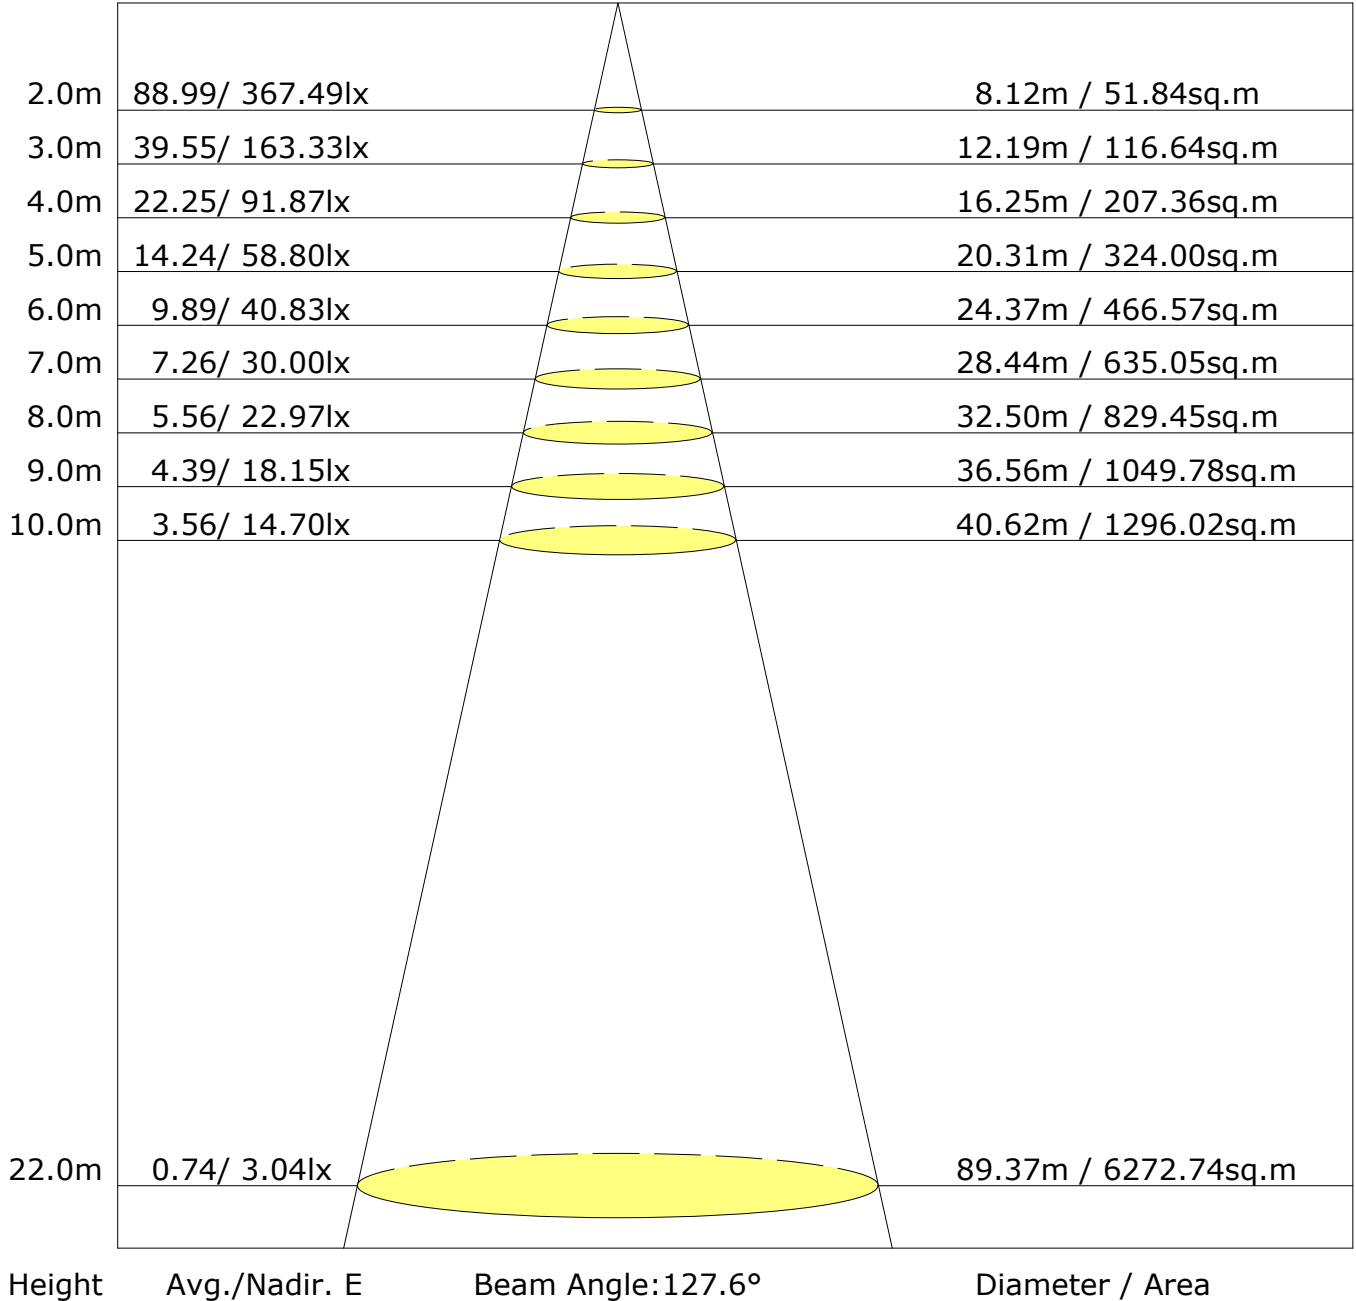

C Plane (°):0.0-360.0: 22.5
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1800B
Distance: 8.190 m
Humidity:
Inspector:

UGR Table


Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
3H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
4H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
6H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
8H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
12H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
X=4H Y=2H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
3H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
4H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
6H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
8H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
12H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
X=8H Y=4H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
6H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
8H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
12H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
X=12H Y=4H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
6H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
8H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
Variations with the observer position at spacings:										
S=1.0H	-1.\$/-1.\$					-1.\$/-1.\$				
S=1.5H	-1.\$/-1.\$					-1.\$/-1.\$				
S=2.0H	-1.\$/-1.\$					-1.\$/-1.\$				

Calculate in accordance with CIE Pub.117. The table is revised with 6509lm ($8\log(F/F_0) = 6.5$).

C Plane (°):0.0-360.0: 22.5
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1800B
Distance: 8.190 m
Humidity:
Inspector:

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM

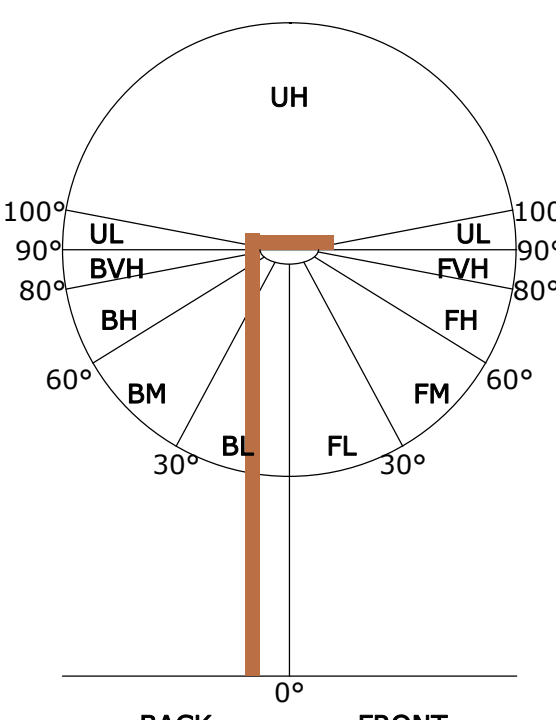
	ZONE	LUMENS	% LAMP LUMENS
	FORWARD LIGHT	5476	84.1
	FL (0°-30°)	909	14.0
	FM (30°-60°)	2820	43.3
	FH (60°-80°)	1422	21.9
	FVH (80°-90°)	325	5.0
	BACK LIGHT	640	9.8
	BL (0°-30°)	254	3.9
	BM (30°-60°)	260	4.0
	BH (60°-80°)	107	1.6
	BVH (80°-90°)	19	0.3
	UP LIGHT	394	6.1
	UL (90°-100°)	164	2.5
	UH (100°-180°)	229	3.5
	TRAPPED LIGHT	NA	NA

BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B1 U5 G2
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B1 U5 G2

C Plane (°):0.0-360.0: 22.5
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1800B
Distance: 8.190 m
Humidity:
Inspector:

LCS Graph

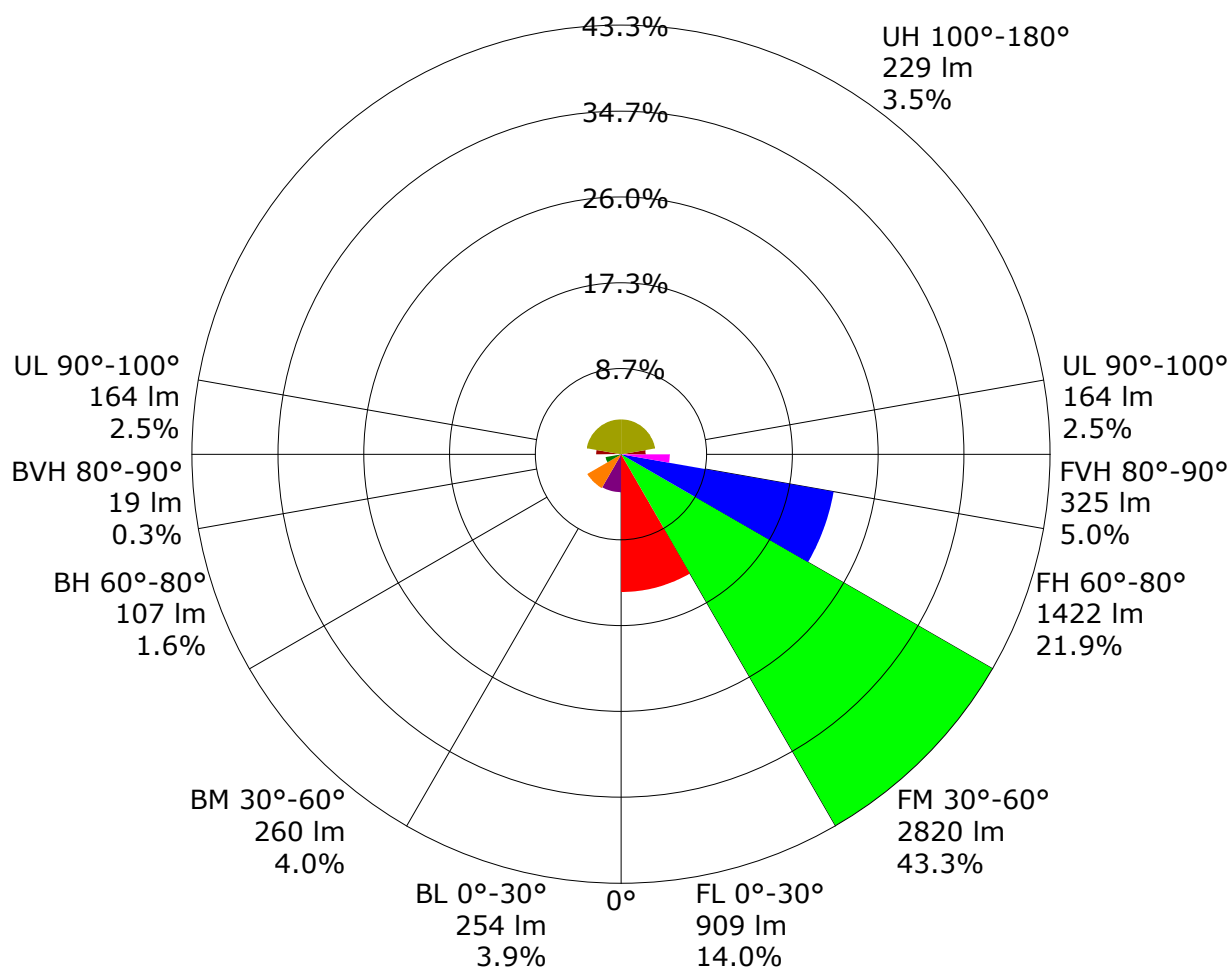

Back Light

Forward Light

Scale= MAX LCS%

Trapped Light:NA,NA

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 8.190 m

Humidity:

Inspector:

Utilisation Factor Table(Floor cavity)

Utilisation Factors UF(F)			SHR NOM = 1.50									
Room Reflectance			Room Index(RI)									
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	0.51	0.59	0.67	0.73	0.80	0.86	0.89	0.95	0.98	
	0.30		0.42	0.51	0.59	0.65	0.73	0.79	0.84	0.90	0.94	
	0.20		0.36	0.44	0.53	0.59	0.67	0.74	0.79	0.85	0.90	
0.50	0.50	0.20	0.48	0.56	0.64	0.69	0.76	0.81	0.85	0.89	0.93	
	0.30		0.41	0.49	0.57	0.62	0.70	0.76	0.80	0.85	0.89	
	0.20		0.36	0.44	0.51	0.57	0.65	0.71	0.76	0.82	0.86	
0.30	0.50	0.20	0.46	0.54	0.61	0.66	0.72	0.77	0.80	0.85	0.88	
	0.30		0.40	0.47	0.55	0.60	0.67	0.73	0.76	0.81	0.85	
	0.20		0.35	0.42	0.50	0.55	0.63	0.69	0.73	0.78	0.82	
0.00	0.00	0.00	0.32	0.39	0.46	0.51	0.59	0.64	0.67	0.73	0.76	
Rating:51W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980												

C Plane (°):0.0-360.0: 22.5
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 8.190 m
 Humidity:
 Inspector:

Utilisation Factor Table(Wall)

Utilisation Factors UF(W)			SHR NOM = 1.50									
Room Reflectance			Room Index(RI)									
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	1.05	0.90	0.77	0.68	0.55	0.47	0.40	0.32	0.26	
	0.30		0.88	0.77	0.67	0.60	0.50	0.43	0.37	0.30	0.25	
	0.20		0.75	0.67	0.60	0.54	0.46	0.39	0.35	0.28	0.24	
0.50	0.50	0.20	1.00	0.86	0.73	0.65	0.52	0.47	0.38	0.30	0.25	
	0.30		0.85	0.75	0.65	0.58	0.48	0.41	0.36	0.29	0.24	
	0.20		0.74	0.66	0.58	0.52	0.44	0.38	0.34	0.27	0.23	
0.30	0.50	0.20	0.96	0.82	0.70	0.62	0.50	0.42	0.36	0.29	0.24	
	0.30		0.82	0.72	0.63	0.56	0.46	0.39	0.34	0.27	0.23	
	0.20		0.72	0.64	0.57	0.51	0.43	0.37	0.32	0.26	0.22	
0.00	0.00	0.00	0.62	0.55	0.48	0.42	0.35	0.30	0.26	0.21	0.18	
<p>Rating:51W Photometrically tested without ceiling board.</p> <p>Multiply UF values by service correction factors</p> <p>Calculate in accordance with CIBSE Technical Memorandum NO.5 1980</p>												

C Plane (°):0.0-360.0: 22.5
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1800B
Distance: 8.190 m
Humidity:
Inspector:

Utilisation Factor Table(Ceiling cavity)

Utilisation Factors UF(C)			SHR NOM = 1.50									
Room Reflectance			Room Index(RI)									
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	0.23	0.24	0.25	0.25	0.26	0.27	0.27	0.28	0.28	
	0.30		0.15	0.17	0.18	0.19	0.21	0.22	0.23	0.24	0.25	
	0.20		0.10	0.12	0.13	0.14	0.16	0.18	0.19	0.21	0.22	
0.50	0.50	0.20	0.22	0.23	0.24	0.24	0.25	0.26	0.26	0.26	0.27	
	0.30		0.15	0.17	0.18	0.19	0.20	0.21	0.22	0.23	0.24	
	0.20		0.10	0.11	0.13	0.14	0.16	0.17	0.18	0.20	0.21	
0.30	0.50	0.20	0.21	0.22	0.23	0.24	0.24	0.25	0.25	0.25	0.26	
	0.30		0.15	0.16	0.17	0.18	0.20	0.21	0.21	0.22	0.23	
	0.20		0.10	0.11	0.13	0.14	0.15	0.17	0.18	0.19	0.20	
0.00	0.00	0.00	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	
<p>Rating:51W Photometrically tested without ceiling board.</p> <p>Multiply UF values by service correction factors</p> <p>Calculate in accordance with CIBSE Technical Memorandum NO.5 1980</p>												

C Plane (°):0.0-360.0: 22.5
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1800B
Distance: 8.190 m
Humidity:
Inspector:

Zonal Lumen

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	1469.8	1.4	1.4	0.02	0.02
1.0-2.0	1470.4	4.2	5.6	0.06	0.09
2.0-3.0	1470.6	7.0	12.7	0.11	0.19
3.0-4.0	1467.9	9.8	22.5	0.15	0.35
4.0-5.0	1462.9	12.6	35.1	0.19	0.54
5.0-6.0	1453.1	15.3	50.3	0.23	0.77
6.0-7.0	1436.0	17.8	68.2	0.27	1.05
7.0-8.0	1417.7	20.3	88.5	0.31	1.36
8.0-9.0	1403.2	22.7	111.2	0.35	1.71
9.0-10.0	1393.5	25.2	136.4	0.39	2.10
10.0-11.0	1386.0	27.7	164.1	0.43	2.52
11.0-12.0	1377.6	30.1	194.2	0.46	2.98
12.0-13.0	1367.9	32.5	226.7	0.50	3.48
13.0-14.0	1359.4	34.8	261.5	0.53	4.02
14.0-15.0	1355.1	37.2	298.7	0.57	4.59
15.0-16.0	1352.8	39.6	338.4	0.61	5.20
16.0-17.0	1350.6	42.1	380.4	0.65	5.84
17.0-18.0	1349.3	44.5	424.9	0.68	6.53
18.0-19.0	1350.0	47.0	471.9	0.72	7.25
19.0-20.0	1351.5	49.5	521.4	0.76	8.01
20.0-21.0	1353.8	52.0	573.4	0.80	8.81
21.0-22.0	1357.1	54.5	627.9	0.84	9.65
22.0-23.0	1362.1	57.2	685.1	0.88	10.52
23.0-24.0	1370.1	59.9	745.0	0.92	11.45
24.0-25.0	1378.5	62.7	807.7	0.96	12.41
25.0-26.0	1385.5	65.4	873.1	1.00	13.41
26.0-27.0	1392.7	68.1	941.2	1.05	14.46
27.0-28.0	1401.1	70.9	1012.2	1.09	15.55
28.0-29.0	1410.0	73.8	1085.9	1.13	16.68
29.0-30.0	1419.3	76.6	1162.6	1.18	17.86
30.0-31.0	1429.7	79.6	1242.2	1.22	19.08
31.0-32.0	1441.2	82.6	1324.7	1.27	20.35
32.0-33.0	1452.8	85.6	1410.3	1.32	21.67
33.0-34.0	1464.5	88.6	1499.0	1.36	23.03
34.0-35.0	1476.7	91.7	1590.7	1.41	24.44
35.0-36.0	1486.5	94.7	1685.4	1.45	25.89

C Plane (°):0.0-360.0: 22.5
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 8.190 m
 Humidity:
 Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	1491.4	97.3	1782.6	1.49	27.39
37.0-38.0	1491.6	99.6	1882.2	1.53	28.92
38.0-39.0	1491.2	101.8	1984.0	1.56	30.48
39.0-40.0	1492.2	104.1	2088.1	1.60	32.08
40.0-41.0	1491.0	106.2	2194.3	1.63	33.71
41.0-42.0	1483.4	107.8	2302.1	1.66	35.37
42.0-43.0	1469.7	108.9	2411.0	1.67	37.04
43.0-44.0	1454.7	109.8	2520.8	1.69	38.73
44.0-45.0	1438.9	110.6	2631.4	1.70	40.43
45.0-46.0	1417.5	110.9	2742.2	1.70	42.13
46.0-47.0	1390.6	110.6	2852.9	1.70	43.83
47.0-48.0	1362.7	110.2	2963.0	1.69	45.52
48.0-49.0	1334.1	109.6	3072.6	1.68	47.20
49.0-50.0	1307.4	109.0	3181.6	1.67	48.88
50.0-51.0	1284.9	108.7	3290.3	1.67	50.55
51.0-52.0	1263.9	108.5	3398.8	1.67	52.22
52.0-53.0	1242.9	108.1	3506.9	1.66	53.88
53.0-54.0	1220.5	107.6	3614.5	1.65	55.53
54.0-55.0	1196.6	106.8	3721.4	1.64	57.17
55.0-56.0	1173.1	106.0	3827.4	1.63	58.80
56.0-57.0	1150.5	105.2	3932.6	1.62	60.42
57.0-58.0	1128.8	104.4	4037.0	1.60	62.02
58.0-59.0	1107.2	103.5	4140.5	1.59	63.61
59.0-60.0	1082.9	102.3	4242.8	1.57	65.18
60.0-61.0	1056.4	100.8	4343.7	1.55	66.73
61.0-62.0	1027.2	99.0	4442.7	1.52	68.25
62.0-63.0	994.2	96.7	4539.4	1.49	69.74
63.0-64.0	960.1	94.2	4633.6	1.45	71.19
64.0-65.0	926.3	91.7	4725.3	1.41	72.60
65.0-66.0	892.9	89.1	4814.4	1.37	73.96
66.0-67.0	860.6	86.5	4900.9	1.33	75.29
67.0-68.0	830.3	84.1	4985.0	1.29	76.59
68.0-69.0	801.7	81.8	5066.8	1.26	77.84
69.0-70.0	775.4	79.6	5146.5	1.22	79.07
70.0-71.0	747.9	77.3	5223.8	1.19	80.25
71.0-72.0	714.1	74.3	5298.1	1.14	81.39

C Plane (°):0.0-360.0: 22.5
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 8.190 m
 Humidity:
 Inspector:

Zonal Lumen (Continue 2)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
72.0-73.0	674.3	70.5	5368.6	1.08	82.48
73.0-74.0	634.5	66.7	5435.3	1.02	83.50
74.0-75.0	598.5	63.2	5498.5	0.97	84.47
75.0-76.0	564.9	60.0	5558.5	0.92	85.40
76.0-77.0	534.8	57.0	5615.5	0.88	86.27
77.0-78.0	508.7	54.5	5670.0	0.84	87.11
78.0-79.0	485.4	52.2	5722.1	0.80	87.91
79.0-80.0	461.3	49.7	5771.9	0.76	88.67
80.0-81.0	432.6	46.8	5818.7	0.72	89.39
81.0-82.0	400.0	43.4	5862.1	0.67	90.06
82.0-83.0	366.9	39.9	5901.9	0.61	90.67
83.0-84.0	336.9	36.7	5938.7	0.56	91.24
84.0-85.0	312.3	34.1	5972.7	0.52	91.76
85.0-86.0	292.4	32.0	6004.7	0.49	92.25
86.0-87.0	275.8	30.2	6034.9	0.46	92.72
87.0-88.0	260.5	28.5	6063.4	0.44	93.15
88.0-89.0	244.8	26.8	6090.3	0.41	93.57
89.0-90.0	227.9	25.0	6115.3	0.38	93.95
90.0-91.0	209.9	23.0	6138.3	0.35	94.30
91.0-92.0	192.7	21.1	6159.4	0.32	94.63
92.0-93.0	177.2	19.4	6178.8	0.30	94.93
93.0-94.0	163.4	17.9	6196.7	0.27	95.20
94.0-95.0	151.3	16.5	6213.2	0.25	95.45
95.0-96.0	140.7	15.4	6228.6	0.24	95.69
96.0-97.0	130.9	14.3	6242.9	0.22	95.91
97.0-98.0	121.5	13.2	6256.1	0.20	96.11
98.0-99.0	112.7	12.2	6268.3	0.19	96.30
99.0-100.0	104.7	11.3	6279.6	0.17	96.47
100.0-101.0	97.9	10.6	6290.2	0.16	96.64
101.0-102.0	92.3	9.9	6300.1	0.15	96.79
102.0-103.0	87.5	9.4	6309.5	0.14	96.93
103.0-104.0	83.0	8.9	6318.3	0.14	97.07
104.0-105.0	78.9	8.4	6326.7	0.13	97.20
105.0-106.0	74.7	7.9	6334.6	0.12	97.32
106.0-107.0	70.6	7.4	6342.0	0.11	97.43
107.0-108.0	66.7	7.0	6349.0	0.11	97.54

C Plane (°):0.0-360.0: 22.5
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 8.190 m
 Humidity:
 Inspector:

Zonal Lumen (Continue 3)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
108.0-109.0	63.4	6.6	6355.6	0.10	97.64
109.0-110.0	60.4	6.2	6361.8	0.10	97.74
110.0-111.0	57.8	5.9	6367.7	0.09	97.83
111.0-112.0	55.5	5.7	6373.4	0.09	97.92
112.0-113.0	53.5	5.4	6378.8	0.08	98.00
113.0-114.0	51.9	5.2	6384.0	0.08	98.08
114.0-115.0	50.4	5.0	6389.1	0.08	98.16
115.0-116.0	49.1	4.9	6393.9	0.07	98.23
116.0-117.0	48.1	4.7	6398.7	0.07	98.30
117.0-118.0	47.0	4.6	6403.2	0.07	98.37
118.0-119.0	46.0	4.4	6407.7	0.07	98.44
119.0-120.0	45.1	4.3	6412.0	0.07	98.51
120.0-121.0	44.2	4.2	6416.1	0.06	98.57
121.0-122.0	43.5	4.1	6420.2	0.06	98.63
122.0-123.0	42.7	3.9	6424.1	0.06	98.70
123.0-124.0	42.0	3.8	6428.0	0.06	98.75
124.0-125.0	41.3	3.7	6431.7	0.06	98.81
125.0-126.0	40.6	3.6	6435.3	0.06	98.87
126.0-127.0	40.0	3.5	6438.9	0.05	98.92
127.0-128.0	39.5	3.4	6442.3	0.05	98.97
128.0-129.0	38.9	3.3	6445.6	0.05	99.03
129.0-130.0	38.4	3.2	6448.9	0.05	99.08
130.0-131.0	37.8	3.2	6452.0	0.05	99.12
131.0-132.0	37.2	3.1	6455.1	0.05	99.17
132.0-133.0	36.6	3.0	6458.1	0.05	99.22
133.0-134.0	36.0	2.9	6460.9	0.04	99.26
134.0-135.0	35.4	2.8	6463.7	0.04	99.30
135.0-136.0	34.6	2.7	6466.4	0.04	99.34
136.0-137.0	33.7	2.5	6468.9	0.04	99.38
137.0-138.0	32.9	2.4	6471.3	0.04	99.42
138.0-139.0	32.0	2.3	6473.7	0.04	99.46
139.0-140.0	31.1	2.2	6475.9	0.03	99.49
140.0-141.0	30.3	2.1	6478.0	0.03	99.52
141.0-142.0	29.6	2.0	6480.0	0.03	99.55
142.0-143.0	29.0	1.9	6481.9	0.03	99.58
143.0-144.0	28.5	1.9	6483.8	0.03	99.61

C Plane (°):0.0-360.0: 22.5
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 8.190 m
 Humidity:
 Inspector:

Zonal Lumen (Continue 4)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
144.0-145.0	27.8	1.8	6485.6	0.03	99.64
145.0-146.0	27.0	1.7	6487.2	0.03	99.66
146.0-147.0	26.2	1.6	6488.8	0.02	99.69
147.0-148.0	25.5	1.5	6490.3	0.02	99.71
148.0-149.0	24.9	1.4	6491.8	0.02	99.73
149.0-150.0	24.4	1.4	6493.1	0.02	99.75
150.0-151.0	23.8	1.3	6494.4	0.02	99.77
151.0-152.0	23.2	1.2	6495.6	0.02	99.79
152.0-153.0	22.5	1.1	6496.8	0.02	99.81
153.0-154.0	21.9	1.1	6497.8	0.02	99.83
154.0-155.0	21.4	1.0	6498.8	0.02	99.84
155.0-156.0	20.9	1.0	6499.8	0.01	99.86
156.0-157.0	20.5	0.9	6500.7	0.01	99.87
157.0-158.0	20.0	0.8	6501.5	0.01	99.88
158.0-159.0	19.5	0.8	6502.3	0.01	99.90
159.0-160.0	19.0	0.7	6503.0	0.01	99.91
160.0-161.0	18.5	0.7	6503.7	0.01	99.92
161.0-162.0	18.1	0.6	6504.3	0.01	99.93
162.0-163.0	17.6	0.6	6504.9	0.01	99.94
163.0-164.0	17.1	0.5	6505.5	0.01	99.94
164.0-165.0	16.6	0.5	6505.9	0.01	99.95
165.0-166.0	16.2	0.4	6506.4	0.01	99.96
166.0-167.0	15.7	0.4	6506.8	0.01	99.96
167.0-168.0	15.3	0.4	6507.1	0.01	99.97
168.0-169.0	14.9	0.3	6507.5	0.00	99.98
169.0-170.0	14.5	0.3	6507.8	0.00	99.98
170.0-171.0	14.2	0.3	6508.0	0.00	99.98
171.0-172.0	14.0	0.2	6508.2	0.00	99.99
172.0-173.0	13.9	0.2	6508.4	0.00	99.99
173.0-174.0	13.8	0.2	6508.6	0.00	99.99
174.0-175.0	13.7	0.1	6508.8	0.00	100.00
175.0-176.0	13.6	0.1	6508.9	0.00	100.00
176.0-177.0	13.5	0.1	6509.0	0.00	100.00
177.0-178.0	13.4	0.1	6509.0	0.00	100.00
178.0-179.0	13.4	0.0	6509.1	0.00	100.00
179.0-180.0	13.4	0.0	6509.1	0.00	100.00

C Plane (°):0.0-360.0: 22.5
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 8.190 m
 Humidity:
 Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5
G0.0	1470.0	1470.0	1470.0	1470.0	1470.0	1470.0	1470.0	1470.0	1470.0	1470.0
G1.0	1459.9	1492.9	1523.0	1548.2	1556.4	1549.3	1532.9	1501.2	1473.3	1437.3
G2.0	1456.2	1524.3	1578.1	1622.0	1643.2	1629.9	1591.2	1531.8	1476.9	1412.8
G3.0	1453.7	1547.6	1637.7	1710.2	1736.6	1714.4	1657.8	1569.6	1478.8	1382.1
G4.0	1447.9	1573.8	1700.7	1793.2	1815.4	1787.1	1718.9	1601.0	1481.0	1355.3
G5.0	1438.0	1600.7	1765.1	1860.0	1882.6	1858.7	1775.6	1636.0	1484.3	1319.5
G6.0	1431.0	1625.2	1812.0	1907.3	1922.2	1897.2	1824.3	1664.0	1487.1	1288.5
G7.0	1421.5	1651.1	1856.3	1932.7	1950.5	1920.2	1857.4	1691.6	1484.8	1245.3
G8.0	1413.0	1674.9	1886.8	1961.2	1997.3	1953.7	1876.9	1718.6	1483.3	1208.3
G9.0	1401.3	1703.8	1903.1	2005.5	2053.4	1998.2	1895.3	1740.3	1488.8	1171.3
G10.0	1396.5	1727.1	1921.6	2061.8	2113.4	2063.0	1924.5	1770.4	1496.1	1140.5
G11.0	1381.0	1739.8	1944.4	2125.6	2150.2	2116.9	1961.8	1788.7	1493.7	1105.3
G12.0	1372.0	1752.3	1978.4	2162.6	2164.5	2140.7	2000.9	1804.0	1491.6	1073.9
G13.0	1361.8	1764.0	2008.8	2177.5	2199.9	2155.0	2044.5	1814.8	1483.9	1036.8
G14.0	1350.6	1772.7	2040.2	2197.8	2270.5	2191.0	2083.5	1814.8	1479.7	996.1
G15.0	1341.0	1778.9	2066.3	2251.8	2342.7	2257.4	2097.4	1816.7	1470.8	955.5
G16.0	1324.7	1776.3	2087.6	2328.4	2402.5	2333.0	2106.4	1816.6	1458.8	913.1
G17.0	1309.7	1771.4	2100.5	2404.0	2476.3	2398.1	2121.1	1823.2	1447.0	872.8
G18.0	1293.7	1768.8	2113.5	2475.1	2550.5	2471.8	2147.5	1824.7	1436.0	835.2
G19.0	1276.7	1760.4	2137.2	2542.1	2612.7	2543.0	2191.0	1835.0	1425.0	798.8
G20.0	1259.9	1759.0	2167.8	2594.1	2673.3	2608.8	2232.9	1838.8	1413.5	763.1
G21.0	1247.4	1764.5	2203.2	2638.5	2731.0	2662.2	2273.9	1849.9	1397.7	733.6
G22.0	1232.1	1769.4	2237.0	2680.0	2806.4	2700.5	2317.2	1858.1	1386.7	705.5
G23.0	1218.1	1779.1	2268.1	2731.2	2879.2	2768.6	2362.7	1866.6	1373.2	678.9
G24.0	1203.3	1789.8	2300.0	2809.0	2948.7	2855.9	2406.0	1871.4	1361.3	655.4
G25.0	1187.2	1796.4	2338.3	2886.2	3018.2	2916.2	2444.3	1870.8	1350.0	631.0
G26.0	1173.9	1808.3	2375.3	2947.4	3097.5	2959.8	2471.7	1869.9	1335.7	606.4
G27.0	1161.3	1816.2	2404.8	2999.8	3198.5	3017.5	2485.7	1875.5	1321.0	586.4
G28.0	1148.4	1822.5	2426.8	3052.8	3278.3	3092.0	2518.0	1879.6	1307.7	567.0
G29.0	1136.8	1830.2	2441.0	3109.0	3362.5	3160.1	2548.1	1888.8	1297.3	549.4
G30.0	1122.6	1838.2	2477.5	3171.4	3457.4	3202.3	2583.3	1892.6	1284.5	531.3
G31.0	1107.3	1833.8	2512.5	3237.5	3579.4	3253.3	2612.9	1891.4	1275.7	512.0
G32.0	1091.4	1831.8	2556.5	3327.1	3659.4	3332.3	2637.4	1886.4	1260.5	494.2
G33.0	1076.3	1825.3	2590.7	3408.7	3733.6	3402.8	2676.7	1885.1	1248.3	476.3
G34.0	1062.3	1817.2	2622.4	3476.6	3834.9	3463.5	2718.6	1882.5	1234.9	462.8
G35.0	1051.1	1807.2	2656.7	3555.7	3931.3	3525.0	2754.1	1887.1	1223.2	450.0
G36.0	1038.9	1791.1	2674.2	3619.3	3977.2	3588.1	2796.9	1887.4	1208.1	436.7

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 8.190 m

Humidity:

Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5
G37.0	1028.3	1776.9	2704.8	3659.5	3991.8	3623.7	2814.8	1891.3	1196.9	425.1
G38.0	1014.9	1761.3	2736.8	3663.8	4001.3	3631.7	2833.7	1890.8	1185.1	412.9
G39.0	1002.5	1754.1	2768.5	3666.7	4044.1	3637.8	2861.6	1889.9	1174.7	402.0
G40.0	991.4	1749.2	2795.1	3681.1	4068.6	3647.5	2896.6	1886.7	1161.5	390.6
G41.0	979.3	1748.5	2815.4	3691.1	4038.7	3646.9	2923.4	1886.2	1149.4	380.1
G42.0	966.4	1743.1	2821.8	3688.4	3965.5	3606.3	2932.6	1887.1	1136.7	367.9
G43.0	954.3	1731.9	2821.9	3661.4	3905.8	3548.6	2921.1	1882.7	1124.2	356.1
G44.0	942.1	1716.2	2820.9	3623.4	3871.1	3506.1	2902.4	1874.7	1113.9	344.1
G45.0	928.2	1695.1	2810.1	3584.4	3800.1	3481.7	2884.5	1855.9	1101.2	332.1
G46.0	919.2	1680.7	2780.7	3539.0	3621.2	3436.9	2858.4	1842.6	1090.2	323.5
G47.0	908.1	1665.3	2748.0	3468.4	3481.1	3340.6	2835.6	1824.6	1075.6	315.9
G48.0	893.9	1652.7	2721.2	3398.5	3348.9	3241.3	2805.3	1807.1	1063.6	307.8
G49.0	883.0	1637.8	2686.5	3314.1	3224.8	3147.4	2760.2	1782.8	1050.6	299.7
G50.0	870.1	1630.1	2638.4	3244.1	3177.4	3048.1	2714.8	1771.5	1035.7	291.1
G51.0	862.1	1621.1	2588.6	3192.5	3145.7	2972.4	2655.0	1763.7	1022.2	280.7
G52.0	854.0	1600.7	2541.8	3168.4	3054.1	2931.9	2595.1	1757.6	1010.0	273.5
G53.0	842.6	1579.4	2487.2	3141.6	2979.7	2889.2	2542.0	1737.6	995.9	265.8
G54.0	832.0	1556.1	2431.4	3081.3	2919.1	2838.8	2483.9	1708.4	985.5	258.0
G55.0	822.0	1533.0	2374.6	3028.5	2857.1	2782.1	2420.6	1680.7	968.6	250.3
G56.0	811.0	1517.2	2318.2	2990.9	2793.1	2725.6	2349.2	1660.1	954.3	241.9
G57.0	797.1	1503.1	2263.6	2937.9	2726.3	2675.1	2287.4	1645.3	939.9	232.9
G58.0	782.4	1485.7	2211.9	2882.4	2706.7	2609.5	2217.9	1632.1	926.4	225.4
G59.0	768.3	1458.0	2163.0	2842.3	2656.6	2552.0	2158.9	1602.0	912.0	217.7
G60.0	751.9	1424.8	2112.7	2780.8	2596.4	2491.6	2098.5	1562.1	892.6	209.3
G61.0	735.3	1395.4	2053.8	2732.3	2531.2	2420.1	2031.3	1525.7	872.3	202.0
G62.0	723.9	1365.3	2004.2	2658.5	2395.3	2348.7	1967.9	1492.4	852.5	193.7
G63.0	706.3	1328.6	1957.7	2561.0	2274.0	2253.7	1902.2	1456.8	836.2	185.7
G64.0	683.5	1291.9	1906.3	2462.7	2176.0	2149.4	1846.4	1414.9	819.4	177.9
G65.0	659.0	1249.7	1851.6	2376.9	2077.9	2053.5	1783.7	1372.9	799.6	170.7
G66.0	632.2	1211.3	1784.2	2305.8	1991.7	1965.6	1717.1	1318.9	780.1	163.4
G67.0	603.0	1166.4	1716.3	2242.3	1923.8	1895.3	1648.4	1264.4	758.6	155.4
G68.0	576.2	1118.9	1658.6	2178.3	1868.8	1841.4	1586.9	1206.9	727.6	149.1
G69.0	545.7	1058.3	1609.3	2129.8	1827.4	1797.7	1517.4	1145.5	700.2	143.9
G70.0	513.3	1002.3	1564.9	2082.5	1783.8	1767.8	1461.3	1095.8	673.8	136.3
G71.0	475.8	957.2	1518.6	2004.8	1711.3	1724.5	1410.5	1038.0	634.7	130.7
G72.0	441.6	915.3	1471.9	1855.9	1608.7	1653.6	1357.4	975.7	604.3	125.3
G73.0	409.3	866.4	1414.3	1675.4	1512.0	1541.1	1303.2	921.7	573.6	120.5

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 8.190 m

Humidity:

Inspector:

Candlepower Table (Continue 2)

Unit: cd

G\C	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5
G74.0	371.0	815.8	1340.8	1571.0	1435.7	1450.2	1235.3	871.8	536.1	114.2
G75.0	337.1	768.7	1274.6	1454.9	1390.1	1369.7	1171.6	819.3	495.2	107.2
G76.0	302.0	720.5	1214.7	1326.3	1361.2	1308.7	1107.8	769.4	460.4	102.5
G77.0	266.2	670.6	1157.7	1240.7	1342.8	1262.7	1045.3	725.8	423.4	96.3
G78.0	229.5	626.0	1108.8	1165.5	1333.3	1235.6	991.7	675.8	387.2	90.6
G79.0	195.8	578.4	1051.1	1120.2	1309.6	1224.1	945.9	629.1	354.4	85.5
G80.0	166.8	534.5	984.0	1057.7	1242.2	1205.7	903.3	584.1	321.0	80.5
G81.0	142.2	487.9	892.5	988.7	1148.5	1155.0	863.0	540.0	286.3	75.9
G82.0	122.5	442.6	778.5	927.0	1047.7	1074.8	822.6	498.6	254.8	71.7
G83.0	104.6	401.0	664.8	863.0	977.5	990.4	772.3	459.0	225.2	67.0
G84.0	87.7	361.5	581.6	804.2	931.6	917.9	722.1	420.2	196.0	63.3
G85.0	72.9	325.9	549.2	755.2	895.9	856.5	671.9	386.4	167.8	59.7
G86.0	61.3	288.7	528.1	725.2	861.5	805.2	629.6	353.5	142.2	56.9
G87.0	52.2	251.2	502.4	712.9	829.6	776.5	592.3	323.3	118.7	53.9
G88.0	45.3	213.0	465.2	693.3	794.7	750.0	559.4	294.4	96.6	51.7
G89.0	39.1	195.1	424.5	653.9	752.1	720.3	525.5	270.2	78.8	49.2
G90.0	35.2	177.8	392.1	601.9	694.4	674.1	485.2	251.4	63.4	47.6
G91.0	32.5	160.7	365.9	547.2	632.1	619.2	446.3	235.0	50.5	45.7
G92.0	30.8	148.3	342.3	497.9	574.6	564.6	410.6	216.3	42.5	44.0
G93.0	29.5	138.0	319.6	454.5	530.6	514.0	376.5	198.3	36.8	42.6
G94.0	29.0	128.5	295.3	415.9	493.5	468.4	343.5	181.4	33.3	41.0
G95.0	28.6	118.6	270.3	390.3	459.2	432.6	313.9	166.7	31.2	39.8
G96.0	28.3	109.9	247.0	368.5	425.6	404.1	286.4	151.9	30.1	38.6
G97.0	28.1	102.8	227.1	347.7	389.5	375.9	261.0	137.7	29.6	37.6
G98.0	28.1	96.3	209.2	322.9	355.7	345.8	237.9	127.2	29.6	36.7
G99.0	28.3	90.4	193.0	293.9	325.7	318.1	220.2	117.8	29.6	35.9
G100.0	28.4	85.2	179.8	266.9	301.3	290.5	204.7	110.4	29.2	35.2
G101.0	28.7	80.2	167.5	248.3	282.0	267.4	192.3	104.1	29.4	34.3
G102.0	28.7	75.8	156.4	233.4	266.5	249.1	180.4	97.8	30.0	33.8
G103.0	29.1	70.9	145.8	219.6	252.1	234.1	169.4	92.3	30.3	33.0
G104.0	29.1	66.9	135.7	206.2	241.7	220.1	159.0	86.1	30.5	32.8
G105.0	29.2	63.4	125.6	193.1	231.6	207.2	147.9	80.6	30.6	32.0
G106.0	29.3	61.0	118.0	179.3	216.2	193.3	137.3	76.1	30.7	31.4
G107.0	29.5	58.7	112.1	164.8	199.7	180.1	127.8	71.6	31.0	30.8
G108.0	29.5	56.9	107.9	152.3	182.5	166.5	121.6	68.2	31.1	30.5
G109.0	29.5	54.8	104.9	141.6	167.2	154.9	116.9	65.7	31.5	29.7
G110.0	29.6	53.1	101.7	132.9	153.1	144.0	111.7	63.0	31.6	29.1

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 8.190 m

Humidity:

Inspector:

Candlepower Table (Continue 3)

Unit: cd

G\C	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5
G111.0	29.3	51.6	97.1	124.8	143.6	135.6	107.1	60.5	31.6	28.5
G112.0	29.0	50.1	92.1	118.3	136.1	128.1	103.0	58.4	31.4	27.8
G113.0	29.0	49.1	87.7	112.3	130.5	122.2	98.1	56.8	31.5	27.2
G114.0	29.0	47.8	84.5	108.2	125.2	116.7	94.0	55.2	31.4	26.4
G115.0	28.6	46.6	82.1	104.1	120.8	112.2	90.3	53.8	31.4	25.7
G116.0	28.4	45.1	80.4	100.6	117.0	108.1	87.7	52.4	31.2	25.0
G117.0	27.9	44.0	78.6	97.6	113.7	104.9	85.2	51.2	30.7	24.9
G118.0	27.3	42.6	76.0	94.8	109.9	101.7	82.7	49.6	30.3	23.9
G119.0	26.6	42.1	73.7	92.4	107.6	99.4	80.1	48.6	29.7	23.7
G120.0	26.2	41.1	71.3	90.3	105.2	97.1	77.6	47.2	29.2	23.2
G121.0	25.4	40.0	69.9	88.2	103.0	95.4	75.2	46.0	28.5	22.8
G122.0	25.3	38.8	68.6	85.8	100.8	93.4	73.2	45.0	27.7	22.4
G123.0	24.4	37.9	67.3	83.9	98.7	91.2	71.5	43.6	27.2	21.8
G124.0	24.0	36.6	66.0	82.6	96.2	89.4	70.0	42.3	26.6	21.9
G125.0	23.2	35.2	64.7	81.7	94.0	87.2	68.2	41.5	26.0	21.5
G126.0	22.7	34.6	63.0	81.2	92.1	85.5	66.4	40.4	25.3	21.0
G127.0	22.0	33.8	61.6	80.3	90.5	83.9	64.7	38.9	24.9	21.1
G128.0	21.9	33.4	60.4	79.2	89.1	82.7	63.1	37.9	24.5	20.8
G129.0	21.3	32.8	58.7	78.3	87.5	80.7	61.5	36.8	24.0	20.7
G130.0	20.9	31.8	57.0	77.1	86.5	79.1	60.1	35.8	23.6	20.8
G131.0	20.5	31.5	55.6	76.2	85.1	76.7	58.3	35.2	23.5	20.8
G132.0	20.3	30.4	54.2	74.5	83.2	74.9	56.6	34.5	23.1	20.7
G133.0	20.4	30.0	52.9	73.0	81.3	72.9	55.0	34.1	22.7	20.5
G134.0	20.0	29.1	51.5	71.6	79.1	71.0	53.3	33.4	22.3	20.5
G135.0	19.7	29.1	49.8	69.3	76.7	68.9	52.0	32.5	22.1	20.4
G136.0	19.5	28.5	47.6	66.7	73.6	66.1	50.3	32.0	21.5	20.3
G137.0	19.2	27.9	45.6	64.4	69.7	64.2	48.4	31.6	21.5	20.2
G138.0	19.0	27.2	44.2	61.3	65.1	61.3	46.3	31.3	21.5	20.4
G139.0	18.9	26.7	42.6	58.4	60.7	58.3	44.3	30.5	21.0	20.4
G140.0	18.6	26.1	41.9	55.7	56.5	55.7	42.9	30.1	20.8	20.0
G141.0	18.4	25.0	41.1	53.4	54.0	53.1	41.3	29.4	20.4	20.0
G142.0	18.4	24.7	39.4	51.9	52.0	51.0	40.0	28.3	20.1	20.1
G143.0	18.2	24.1	37.9	51.1	51.1	49.7	38.3	27.4	20.0	19.8
G144.0	17.9	23.5	35.9	49.8	49.6	48.3	36.9	26.8	19.8	19.6
G145.0	17.9	22.9	34.5	47.7	47.4	46.5	35.0	26.2	19.3	19.4
G146.0	17.6	22.1	33.6	45.3	44.0	43.9	33.5	25.6	19.3	19.2
G147.0	17.5	21.2	32.6	43.1	41.1	41.4	31.8	24.6	19.0	19.1

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 8.190 m

Humidity:

Inspector:

Candlepower Table (Continue 4)

Unit: cd

G\C	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5
G148.0	17.4	20.8	31.6	41.3	39.4	39.1	30.7	23.9	18.7	18.9
G149.0	17.1	20.1	30.7	40.2	38.0	37.7	29.5	23.1	18.5	18.8
G150.0	17.0	19.5	29.2	38.9	36.8	36.4	28.5	22.3	18.1	18.6
G151.0	16.8	18.7	28.4	37.1	35.3	34.5	27.5	21.5	17.6	18.2
G152.0	16.6	18.4	27.6	35.1	33.2	32.4	26.2	20.6	17.4	18.3
G153.0	16.3	18.1	26.8	33.2	30.5	30.6	25.0	19.8	17.3	17.9
G154.0	16.3	17.3	26.0	31.9	28.8	29.1	24.5	19.1	16.9	17.6
G155.0	16.0	16.6	25.1	30.9	28.0	27.4	24.3	18.3	16.7	17.4
G156.0	15.9	16.0	24.0	29.8	27.8	25.7	23.5	17.7	16.0	17.2
G157.0	15.8	15.4	22.7	28.4	27.3	24.6	22.7	16.8	15.9	17.0
G158.0	15.7	15.1	21.8	26.6	26.3	23.4	22.0	16.3	15.8	16.7
G159.0	15.5	14.9	20.5	25.3	25.2	22.4	21.0	15.8	15.2	16.6
G160.0	15.1	14.6	19.6	24.2	24.0	21.0	20.1	15.6	15.1	16.3
G161.0	14.9	14.2	18.3	23.0	23.3	20.6	19.7	15.0	14.7	16.0
G162.0	14.7	14.0	17.4	21.7	22.1	19.9	18.8	15.1	14.6	15.8
G163.0	14.2	13.7	16.2	20.3	21.3	19.7	17.7	14.8	14.1	15.5
G164.0	14.2	13.3	15.1	19.2	19.9	18.9	16.9	14.5	13.9	15.2
G165.0	13.8	12.9	14.1	17.8	19.1	18.3	16.0	14.5	13.6	15.1
G166.0	13.8	12.9	13.0	16.4	18.2	17.8	15.0	14.3	13.4	15.1
G167.0	13.6	12.6	11.7	15.2	17.3	16.9	14.1	14.2	13.3	14.8
G168.0	13.3	12.6	11.3	14.3	16.3	16.1	13.6	14.1	13.1	14.7
G169.0	13.0	12.3	11.2	13.1	14.9	15.3	13.5	14.0	12.6	14.1
G170.0	13.0	12.3	11.3	11.9	14.1	14.3	13.6	14.0	12.7	14.2
G171.0	12.6	12.1	11.2	11.0	12.9	13.2	13.9	13.9	12.4	13.9
G172.0	12.5	12.1	11.5	11.9	12.6	13.4	13.7	13.8	12.4	13.9
G173.0	12.6	12.1	11.6	12.0	13.0	13.7	13.4	13.4	12.3	13.9
G174.0	12.3	11.8	11.5	12.3	12.9	14.2	13.4	13.2	12.2	13.5
G175.0	12.2	12.2	11.8	12.7	13.6	13.9	13.2	13.4	12.3	13.3
G176.0	12.3	12.1	12.5	13.1	14.1	13.8	13.2	13.4	12.2	13.2
G177.0	12.3	12.1	12.4	13.3	14.2	13.8	12.9	13.0	12.3	12.9
G178.0	12.1	12.3	12.6	13.6	13.3	14.4	13.0	13.0	12.3	13.0
G179.0	12.4	12.6	13.0	14.0	13.8	14.2	13.2	13.0	12.5	13.0
G180.0	12.2	12.8	13.4	14.3	13.7	13.8	13.6	12.7	12.3	12.4

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 8.190 m

Humidity:

Inspector:

Candlepower Table (Continue 5)

Unit: cd

G\C	C225.0	C247.5	C270.0	C292.5	C315.0	C337.5	C360.0			
G0.0	1470.0	1470.0	1470.0	1470.0	1470.0	1470.0	1470.0			
G1.0	1410.3	1399.8	1391.6	1392.9	1411.4	1435.4	1459.9			
G2.0	1358.1	1321.7	1309.0	1321.4	1358.0	1403.2	1456.2			
G3.0	1292.5	1228.3	1207.4	1231.3	1299.2	1372.8	1453.7			
G4.0	1220.9	1138.1	1113.7	1140.1	1227.4	1339.5	1447.9			
G5.0	1150.3	1052.6	1017.8	1057.7	1155.0	1305.2	1438.0			
G6.0	1086.2	963.5	912.9	964.2	1084.0	1269.2	1431.0			
G7.0	1014.9	862.2	812.8	867.6	1019.3	1226.0	1421.5			
G8.0	944.3	782.3	738.2	782.4	945.2	1184.7	1413.0			
G9.0	871.5	718.6	673.6	714.5	872.2	1141.2	1401.3			
G10.0	808.0	653.5	609.8	652.7	799.9	1101.2	1396.5			
G11.0	749.9	600.8	560.4	593.3	740.6	1059.3	1381.0			
G12.0	704.3	557.0	509.5	548.2	689.9	1022.0	1372.0			
G13.0	657.1	506.1	464.6	501.6	641.4	983.8	1361.8			
G14.0	611.5	464.7	430.3	456.6	596.2	942.9	1350.6			
G15.0	572.5	433.9	399.0	423.3	556.6	899.8	1341.0			
G16.0	538.6	402.8	368.2	394.7	521.2	853.4	1324.7			
G17.0	500.5	373.5	337.9	364.2	481.9	809.6	1309.7			
G18.0	464.7	346.3	302.8	336.9	446.4	772.7	1293.7			
G19.0	436.9	315.7	275.6	306.1	418.6	738.4	1276.7			
G20.0	410.6	285.4	253.7	276.3	391.2	707.6	1259.9			
G21.0	386.8	263.5	233.8	253.0	368.1	679.1	1247.4			
G22.0	363.4	243.6	212.8	233.5	344.8	650.3	1232.1			
G23.0	341.0	225.5	192.1	216.5	321.7	622.6	1218.1			
G24.0	320.2	204.7	177.9	195.3	299.4	599.8	1203.3			
G25.0	294.2	188.1	163.7	179.0	272.2	579.3	1187.2			
G26.0	272.3	174.2	148.6	165.7	253.6	559.2	1173.9			
G27.0	254.0	161.5	135.7	153.1	236.5	539.9	1161.3			
G28.0	238.2	147.2	125.2	138.2	222.0	522.2	1148.4			
G29.0	223.8	134.7	113.7	127.2	207.3	503.3	1136.8			
G30.0	208.5	124.4	103.1	116.3	189.4	482.7	1122.6			
G31.0	192.7	113.7	93.9	105.9	176.4	465.9	1107.3			
G32.0	178.9	102.7	84.5	95.6	164.7	449.9	1091.4			
G33.0	167.3	93.7	75.0	86.4	153.4	435.3	1076.3			
G34.0	157.7	85.1	66.6	77.7	142.9	421.8	1062.3			
G35.0	146.5	75.9	57.9	69.0	129.8	405.9	1051.1			
G36.0	134.7	67.5	50.0	60.9	120.4	391.7	1038.9			

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 8.190 m

Humidity:

Inspector:

Candlepower Table (Continue 6)

Unit: cd

G\C	C225.0	C247.5	C270.0	C292.5	C315.0	C337.5	C360.0			
G37.0	125.4	59.3	42.2	52.7	111.7	378.0	1028.3			
G38.0	117.2	51.6	35.3	45.6	102.3	365.6	1014.9			
G39.0	108.9	44.0	28.5	38.2	93.1	353.1	1002.5			
G40.0	99.1	37.4	22.7	31.6	85.7	338.9	991.4			
G41.0	91.8	30.7	16.3	25.7	78.5	326.9	979.3			
G42.0	84.1	24.6	8.7	19.6	70.5	317.3	966.4			
G43.0	76.5	19.0	1.3	14.0	63.3	306.3	954.3			
G44.0	69.8	12.9	1.2	8.1	56.6	296.9	942.1			
G45.0	63.3	5.9	1.1	1.7	50.5	287.3	928.2			
G46.0	57.1	2.1	1.4	1.4	44.4	277.2	919.2			
G47.0	51.1	1.8	1.1	1.4	39.2	266.7	908.1			
G48.0	45.5	1.9	1.1	1.5	34.1	257.7	893.9			
G49.0	40.2	1.9	1.3	1.5	29.5	248.4	883.0			
G50.0	35.5	1.9	1.4	1.4	25.1	238.8	870.1			
G51.0	31.1	1.9	1.2	1.5	20.8	229.7	862.1			
G52.0	27.0	2.1	1.6	1.7	16.3	220.3	854.0			
G53.0	22.8	1.8	1.3	1.7	15.6	212.6	842.6			
G54.0	18.9	1.8	1.6	1.7	15.1	205.6	832.0			
G55.0	18.6	2.1	1.6	1.7	14.9	195.8	822.0			
G56.0	18.5	2.2	1.6	1.8	14.8	188.1	811.0			
G57.0	17.8	2.1	1.6	1.7	14.7	181.8	797.1			
G58.0	17.8	2.2	1.8	1.8	14.3	176.0	782.4			
G59.0	17.5	2.2	2.0	1.9	14.1	167.7	768.3			
G60.0	16.9	2.2	1.9	1.9	13.7	159.8	751.9			
G61.0	16.9	2.4	2.0	2.3	13.7	151.6	735.3			
G62.0	16.5	2.5	2.0	2.3	13.5	143.0	723.9			
G63.0	16.5	2.5	2.3	2.3	13.4	133.7	706.3			
G64.0	16.5	2.5	2.2	2.4	13.2	126.1	683.5			
G65.0	16.0	2.7	2.5	2.1	13.0	119.7	659.0			
G66.0	16.0	3.0	2.5	2.5	13.2	113.3	632.2			
G67.0	15.9	2.9	2.6	2.9	12.9	107.3	603.0			
G68.0	15.8	3.0	2.9	3.0	12.7	99.7	576.2			
G69.0	16.1	3.3	2.9	3.1	12.3	92.5	545.7			
G70.0	15.7	3.4	2.9	3.1	12.1	87.3	513.3			
G71.0	15.4	3.5	3.1	3.3	11.7	82.7	475.8			
G72.0	15.3	3.6	3.4	3.4	11.4	79.0	441.6			
G73.0	15.0	3.8	3.5	3.8	11.6	75.4	409.3			

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 8.190 m

Humidity:

Inspector:

Candlepower Table (Continue 7)

Unit: cd

G\C	C225.0	C247.5	C270.0	C292.5	C315.0	C337.5	C360.0			
G74.0	15.2	3.9	3.8	3.9	11.0	73.0	371.0			
G75.0	15.0	4.2	3.8	3.9	11.2	70.9	337.1			
G76.0	14.8	4.0	4.0	4.0	11.0	67.9	302.0			
G77.0	14.7	4.3	4.2	4.4	10.8	63.9	266.2			
G78.0	14.4	4.6	4.6	4.4	10.8	60.6	229.5			
G79.0	14.7	4.9	4.6	4.5	10.6	56.4	195.8			
G80.0	14.4	5.1	4.9	4.6	10.7	53.3	166.8			
G81.0	14.3	5.3	5.1	5.1	10.7	50.1	142.2			
G82.0	14.2	5.7	5.3	5.2	10.5	47.2	122.5			
G83.0	14.1	5.8	5.5	5.7	10.5	44.1	104.6			
G84.0	14.0	6.0	5.6	5.8	10.2	41.6	87.7			
G85.0	13.9	6.5	5.9	6.3	10.5	39.3	72.9			
G86.0	13.9	6.5	6.1	6.3	10.6	37.7	61.3			
G87.0	13.6	7.0	6.6	6.5	10.8	36.2	52.2			
G88.0	13.8	7.1	6.7	6.8	10.8	34.9	45.3			
G89.0	13.9	7.7	7.3	7.0	10.6	33.5	39.1			
G90.0	13.7	7.9	7.5	7.3	10.8	32.5	35.2			
G91.0	13.8	8.2	7.7	7.6	10.9	31.2	32.5			
G92.0	13.6	8.3	7.8	8.0	11.0	30.5	30.8			
G93.0	13.8	8.5	8.3	8.2	11.3	29.3	29.5			
G94.0	13.8	9.3	8.7	8.6	11.2	28.4	29.0			
G95.0	14.0	9.3	8.8	8.8	11.2	27.4	28.6			
G96.0	14.0	9.7	9.1	9.0	11.4	26.8	28.3			
G97.0	13.9	10.0	9.6	9.4	11.6	26.2	28.1			
G98.0	14.2	10.5	9.7	10.0	12.0	25.8	28.1			
G99.0	14.4	10.8	10.2	10.0	11.9	25.1	28.3			
G100.0	14.2	11.0	10.6	10.3	12.1	24.6	28.4			
G101.0	14.4	11.5	10.9	10.6	12.1	23.9	28.7			
G102.0	14.8	11.9	11.2	10.9	12.4	23.6	28.7			
G103.0	14.8	12.1	11.7	11.4	12.9	22.9	29.1			
G104.0	15.0	12.6	12.1	11.8	12.9	22.7	29.1			
G105.0	15.1	13.0	12.4	11.9	13.2	22.2	29.2			
G106.0	15.3	13.4	13.0	12.4	13.6	21.7	29.3			
G107.0	15.5	13.7	13.2	12.8	14.0	21.3	29.5			
G108.0	15.8	14.0	13.6	13.3	14.0	21.2	29.5			
G109.0	15.8	14.5	14.2	13.4	14.1	20.6	29.5			
G110.0	16.0	14.8	14.4	13.9	14.2	20.3	29.6			

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 8.190 m

Humidity:

Inspector:

Candlepower Table (Continue 8)

Unit: cd

G\C	C225.0	C247.5	C270.0	C292.5	C315.0	C337.5	C360.0			
G111.0	16.3	15.1	14.8	14.3	14.7	19.9	29.3			
G112.0	16.9	15.4	15.1	14.5	14.7	19.7	29.0			
G113.0	16.8	15.8	15.7	14.9	14.8	19.7	29.0			
G114.0	17.1	16.2	15.9	15.0	15.4	19.2	29.0			
G115.0	17.1	16.4	16.3	15.5	15.4	19.0	28.6			
G116.0	17.6	16.7	16.6	15.9	15.6	19.1	28.4			
G117.0	17.7	17.2	17.1	16.1	15.9	18.7	27.9			
G118.0	17.7	17.2	17.2	16.5	16.0	18.5	27.3			
G119.0	18.1	17.7	17.7	16.9	16.2	18.5	26.6			
G120.0	18.0	17.9	18.0	17.3	16.3	18.4	26.2			
G121.0	18.3	18.6	18.0	17.4	16.6	18.3	25.4			
G122.0	18.6	18.6	18.6	17.5	16.7	18.3	25.3			
G123.0	18.5	18.9	18.9	18.1	17.0	18.0	24.4			
G124.0	18.8	19.2	18.9	18.3	16.9	18.1	24.0			
G125.0	19.1	19.5	19.5	18.4	16.9	18.1	23.2			
G126.0	19.0	20.0	19.6	18.8	17.4	18.1	22.7			
G127.0	19.1	20.1	19.9	18.8	17.3	18.1	22.0			
G128.0	19.5	20.3	19.9	19.2	17.7	18.3	21.9			
G129.0	19.4	20.4	20.3	19.4	17.7	18.4	21.3			
G130.0	19.8	20.8	20.3	19.4	17.7	18.4	20.9			
G131.0	19.7	20.8	20.6	20.0	17.7	18.6	20.5			
G132.0	19.8	21.1	20.7	19.9	18.1	18.6	20.3			
G133.0	20.0	21.2	20.8	20.0	18.2	19.0	20.4			
G134.0	20.0	21.2	20.8	20.1	18.2	18.8	20.0			
G135.0	20.0	21.4	21.3	20.2	18.6	18.8	19.7			
G136.0	19.8	21.7	21.0	20.2	18.3	19.1	19.5			
G137.0	19.8	21.7	21.2	20.6	18.6	19.1	19.2			
G138.0	19.8	22.0	21.4	20.6	18.7	19.1	19.0			
G139.0	20.0	21.8	21.5	20.7	18.6	19.2	18.9			
G140.0	20.0	22.1	21.8	20.7	18.8	19.1	18.6			
G141.0	20.1	21.8	21.6	20.8	18.6	19.4	18.4			
G142.0	19.8	21.9	21.8	20.6	18.4	19.2	18.4			
G143.0	20.0	22.0	21.8	20.9	18.6	19.0	18.2			
G144.0	19.8	22.3	21.9	20.9	18.7	19.2	17.9			
G145.0	19.8	22.0	21.9	20.7	18.6	19.1	17.9			
G146.0	19.6	21.8	21.8	20.9	18.6	19.0	17.6			
G147.0	19.7	21.8	21.6	21.0	18.6	18.8	17.5			

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 8.190 m

Humidity:

Inspector:

Candlepower Table (Continue 9)

Unit: cd

G\C	C225.0	C247.5	C270.0	C292.5	C315.0	C337.5	C360.0			
G148.0	19.5	21.9	21.9	20.9	18.8	18.7	17.4			
G149.0	19.4	21.8	21.8	20.9	18.6	18.6	17.1			
G150.0	18.9	21.7	21.5	20.8	18.8	18.4	17.0			
G151.0	18.8	22.0	21.4	20.7	19.0	18.1	16.8			
G152.0	18.8	21.5	21.5	20.7	19.1	18.0	16.6			
G153.0	18.6	21.7	21.3	20.5	19.1	17.8	16.3			
G154.0	18.6	21.3	21.2	20.6	19.4	17.6	16.3			
G155.0	18.5	21.0	21.4	20.5	19.1	17.5	16.0			
G156.0	18.2	20.9	21.6	20.5	19.3	17.3	15.9			
G157.0	18.0	20.8	21.5	20.1	18.9	17.2	15.8			
G158.0	17.8	20.7	21.9	20.1	18.7	17.0	15.7			
G159.0	17.7	20.4	21.9	20.2	18.6	16.5	15.5			
G160.0	17.4	20.0	22.0	19.7	18.3	16.4	15.1			
G161.0	17.6	19.8	21.5	19.4	18.3	16.3	14.9			
G162.0	17.2	19.7	21.5	19.4	18.1	16.1	14.7			
G163.0	16.9	19.4	20.3	19.3	18.1	16.0	14.2			
G164.0	16.9	19.4	19.7	18.9	17.6	15.5	14.2			
G165.0	16.6	18.9	19.6	18.7	17.3	15.5	13.8			
G166.0	16.5	18.9	19.1	18.7	17.1	15.3	13.8			
G167.0	16.2	18.4	19.1	18.4	17.0	15.0	13.6			
G168.0	16.2	18.0	18.2	17.8	16.7	14.6	13.3			
G169.0	16.0	18.0	18.4	17.7	16.4	14.5	13.0			
G170.0	15.9	17.7	17.5	17.3	15.9	14.3	13.0			
G171.0	15.6	17.4	17.7	17.1	15.6	14.0	12.6			
G172.0	14.9	16.9	16.9	17.0	15.3	13.9	12.5			
G173.0	15.0	16.6	16.5	16.4	15.1	13.5	12.6			
G174.0	15.1	16.1	16.3	16.1	14.8	13.5	12.3			
G175.0	14.4	15.8	15.9	15.9	14.6	13.3	12.2			
G176.0	14.3	15.7	15.4	15.3	14.3	13.2	12.3			
G177.0	14.0	15.4	15.1	15.0	14.0	12.8	12.3			
G178.0	13.8	15.3	14.4	14.9	14.0	12.6	12.1			
G179.0	13.6	14.8	13.9	14.4	14.0	12.6	12.4			
G180.0	13.4	14.5	13.8	14.2	13.3	12.8	12.2			

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 8.190 m

Humidity:

Inspector: