



LED LAMPS

ProLED[®] **A19 and BR30** **Contractor Series 6 Pack**



UL Listed



ROHS Compliant

The Halco Contractor Series 6 Pack gives you a performance product at an economical price



15,000 Hours Useful Life

Acceptable for use in insulated contact airtight (ICAT) rated fixtures

Backed by a 3-Year Warranty

Applications:

A19:

Retail
Hospitality
Residential

BR30:

Residential
Light Commercial
Hospitality

Markets:

Residential
Commercial

Halco
LIGHTING TECHNOLOGIES

Contact Your Customer Care Specialist
For Pricing, Orders And Technical Support.


800.677.3334 **www.halcolighting.com**

ProLED®

A19 Contractor Series 6 Pack

Specifications

- 15,000 hour life resulting in lower maintenance costs over time
- 88 lumens per watt
- 82 CRI for quality and consistent color rendering
- UL approved for damp locations
- ICAT rated
- Omnidirectional
- Dimmable and Non-Dimmable options

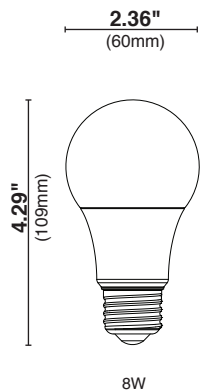


Product #: _____ Type: _____

Project: _____ Date: _____

Comments: _____ Initials: _____

Savings Comparison

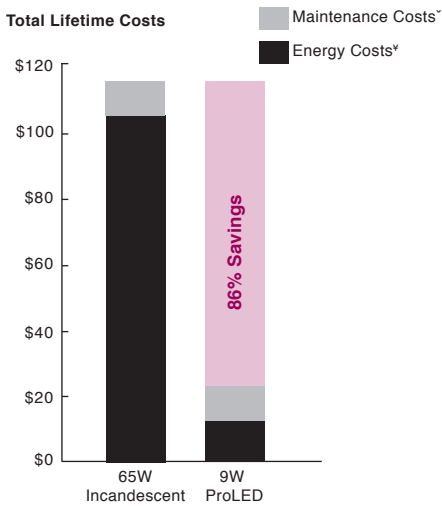

A19 Ordering Information



Watt	Base	Product #	Product Code	Voltage	Color Temp	CRI	Lumens	Useful Life	Beam Angle	Pkg Qty	MOL	Eq. Wattage	Certification
Non-Dimmable													
9W	E26	88036	A19FR9-827-ECO-LED4-6pk	120	2700K	80	720	15,000	220°		4.13"	60W	ETL
9W	E26	88037	A19FR9-830-ECO-LED4-6pk	120	3000K	80	720	15,000	220°		4.13"	60W	ETL
9W	E26	88038	A19FR9-840-ECO-LED4-6pk	120	4000K	80	720	15,000	220°	6/48	4.13"	60W	ETL,
9W	E26	88039	A19FR9-850-ECO-LED4-6pk	120	5000K	80	720	15,000	220°	6/48	4.13"	60W	ETL,
Dimmable													
9W	E26	88040	A19FR9-827-DIM-LED4-6pk	120	2700K	80	800	15,000	220°	6/48	4.13"	60W	ETL,
9W	E26	88041	A19FR9-830-DIM-LED4-6pk	120	3000K	80	800	15,000	220°	6/48	4.13"	60W	ETL,
9W	E26	88042	A19FR9-840-DIM-LED4-6pk	120	4000K	80	800	15,000	220°	6/48	4.13"	60W	ETL,
9W	E26	88043	A19FR9-850-DIM-LED4-6pk	120	5000K	80	800	15,000	220°	6/48	4.13"	60W	ETL,


* Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to burn past this point, but at decreased light levels.
Warranty – Commercial / Industrial: This product is warranted for 3 years from the date of purchase, based on 10 hours of use per day. Must be operated with an ambient fixture temperature between -4°F(-20°C) and 122°F(50°C).

ProLED®

BR30 Contractor Series 6 Pack


Specifications

- 15,000 hour life resulting in lower maintenance costs over time
- 82 lumens per watt
- 82 CRI for quality and consistent color rendering
- UL approved for damp locations
- ICAT rated
- Dimmable

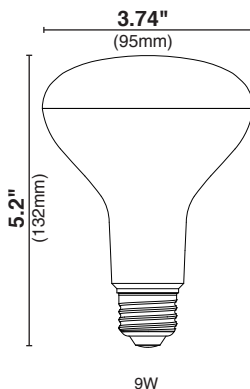

Product #: _____ Type: _____
 Project: _____ Date: _____
 Comments: _____ Initials: _____

Savings Comparison

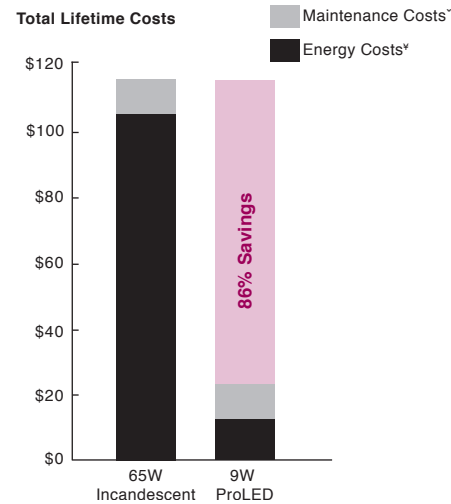

* Maintenance costs based on 15 minutes at \$40 per/hr
 ¥ Energy costs based on \$0.11 kWh

BR30 Ordering Information

Watt	Base	Product #	Product Code	Voltage	Color Temp	CRI	Lumens	Useful Life	Beam Spread	Pkg Qty	MOL	Equivalent Wattage
8W	Medium	82172	BR30FL8/827/ECO/LED/6	120	2700K	82	650	15,000	110°	6/24	5.2"	65W
8W	Medium	82170	BR30FL8/830/ECO/LED/6	120	3000K	82	650	15,000	110°	6/24	5.1"	65W

°Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to burn past this point, but at decreased light levels.

Warranty – Commercial / Industrial: This product is warranted for 3 years from the date of purchase. Must be operated with an ambient fixture temperature between -4°F(-20°C) and 122°F(50°C).

