



LED LAMPS

ProLED[®] GU24 A19 Omnidirectional Series



Omnidirectional



Enclosed Rated



ProLED[®] GU24 Omnidirectional A-Shape Series lamps offer an economical and even more energy efficient alternative to non-dimmable compact fluorescent lamps



Omnidirectional Optical Design Provides 220° Light Distribution

UL Listed for Damp Location & Enclosed Luminaires

Backed by a 3-Year Warranty

Applications:

- Home
- Education
- Hospitality
- Retail

Markets:

- Residential
- Commercial



Contact Your Customer Care Specialist For Pricing, Orders And Technical Support.
800.677.3334 www.halcolighting.com

ProLED[®]

GU24 A19 Omnidirectional Series


Product #: _____ Type: _____

Project: _____ Date: _____

Comments: _____ Initials: _____


Specifications

- Available in 2700K, 3000K, 4000K or 5000K CCT
- UL Listed for damp location and enclosed luminaires
- 220° beam angle creates uniform distribution of light
- 3-year warranty
- Rated for ICAT fixtures
- Non-Dimmable

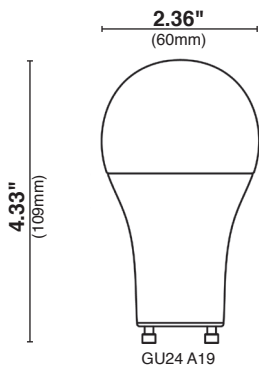

Savings Comparison

Total Lifetime Costs

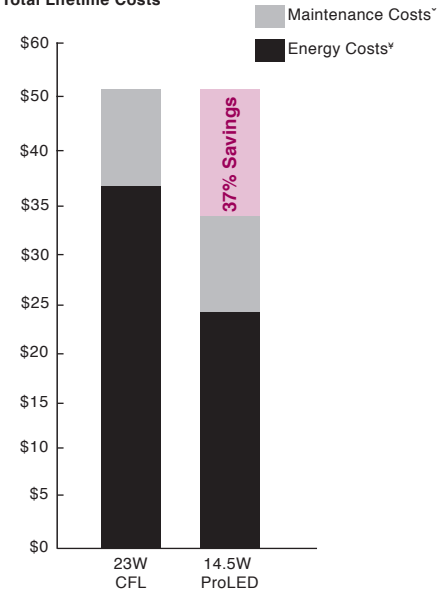

* Maintenance costs based on 15 minutes at \$40 per/hr
 † Energy costs based on \$0.11 kWh

Ordering Information



Watts	Base	Product #	Product Code	Volts	Color Temp.	CRI	Lumens	Useful Life*	Beam Angle	Pkg. Qty.	MOL	Equivalent CFL Wattage	Certification
9W	GU24	88055	A19FR9-827-GU24-LED	120	2700K	80	800	15,000	220°	1/48	4.17"	60W	ETL
9W	GU24	88056	A19FR9-830-GU24-LED	120	3000K	80	800	15,000	220°	1/48	4.17"	60W	ETL
9W	GU24	88057	A19FR9-840-GU24-LED	120	4000K	80	800	15,000	220°	1/48	4.17"	60W	ETL
9W	GU24	88058	A19FR9-850-GU24-LED	120	5000K	80	800	15,000	220°	1/48	4.17"	60W	ETL
11W	GU24	88059	A19FR11-827-GU24-LED	120	2700K	80	1100	15,000	220°	1/48	4.64"	75W	ETL
15W	GU24	88060	A19FR15-840-GU24-LED	120	4000K	80	1600	15,000	220°	1/48	4.64"	100W	ETL

* Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to burn past this point, but at decreased light levels.
 Warranty – Commercial / Industrial: This product is warranted for 3 years from the date of purchase.
 15,000 hour useful life rating is based on a maximum ambient temperature of 45°C. Exceeding this ambient temperature rating may result in reduced life.