



## LED LAMPS

### **ProLED®** **Omnidirectional A-Shape Series**



Dimmable



Omnidirectional



Enclosed Rated

ProLED® Omnidirectional A-Shape Series dimmable lamps feature superior thermal construction for long life and energy efficient illumination



**Omnidirectional Optical Design Provides 230° Light Distribution**

**UL Listed for Damp Location & Enclosed Fixtures**

**Backed by a 3-Year Warranty**

#### **Applications:**

Home  
Education  
Healthcare  
Hospitality  
Retail

#### **Markets:**

Residential  
Commercial

**Halco**  
LIGHTING TECHNOLOGIES

Contact Your Customer Care Specialist  
For Pricing, Orders And Technical Support.

800.677.3334 [www.halcolighting.com](http://www.halcolighting.com)


# ProLED®

## Omnidirectional A-Shape Series

Product #: \_\_\_\_\_ Type: \_\_\_\_\_  
 Project: \_\_\_\_\_ Date: \_\_\_\_\_  
 Comments: \_\_\_\_\_ Initials: \_\_\_\_\_


### Specifications

- Available in 2700K, 3000K, 4000K or 5000K CCT
- UL Listed for damp location
- Dimmable to 10% for design flexibility (excludes 3-way lamps)
- 220° degree beam angle creates uniform distribution of light
- 3-year warranty
- 80196, 80197, 80198, 80199: This product is warranted for 5 years from date of purchase
- Rated for ICAT fixtures

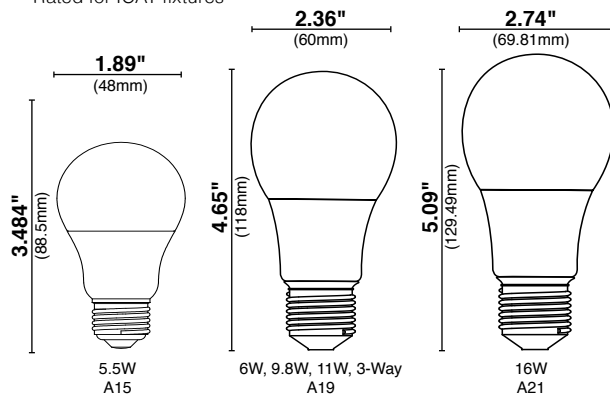

### Savings Comparison

Total Lifetime Costs

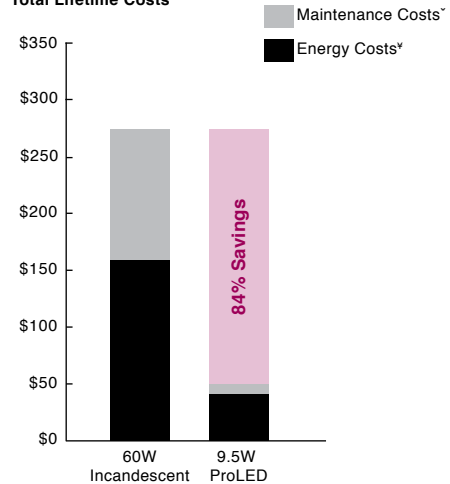

\* Maintenance costs based on 15 minutes at \$40 per/hr  
 \* Energy costs based on \$0.11 kWh

### Ordering Information



	Watt	Base	Product #	Product Code	Volts	Color Temp.	CRI	Lumens	Useful Life*	Beam Angle	Pkg. Qty.	MOL	Equivalent Wattage
<b>A15</b>													
⊛	5.5W	Medium	80196	A15FR5/827/OMNI2/LED	120	2700K	82	450	25,000	230°	1/6	3.484"	40
⊛	5.5W	Medium	80197	A15FR5/830/OMNI2/LED	120	3000K	82	450	25,000	230°	1/6	3.484"	40
⊛	5.5W	Medium	80198	A15FR5/840/OMNI2/LED	120	4000K	82	450	25,000	220°	1/6	3.484"	40
⊛	5.5W	Medium	80199	A15FR5/850/OMNI2/LED	120	5000K	82	450	25,000	220°	1/6	4.484"	40
<b>A19</b>													
⊛	6W	Medium	84965	A19FR6/827/OMNI3/LED	120	2700K	82	480	15,000	220°	1/6	4.33"	40
⊛	6W	Medium	84966	A19FR6/830/OMNI3/LED	120	3000K	82	480	15,000	220°	1/6	4.33"	40
⊛	9.8W	Medium	84967	A19FR9/827/OMNI3/LED	120	2700K	82	800	15,000	220°	1/6	4.33"	60
⊛	9.8W	Medium	84968	A19FR9/830/OMNI3/LED	120	3000K	82	800	15,000	220°	1/6	4.33"	60
⊛	9.8W	Medium	84969	A19FR9/840/OMNI3/LED	120	4000K	82	800	15,000	220°	1/6	4.33"	60
⊛	9.8W	Medium	84970	A19FR9/850/OMNI3/LED	120	5000K	82	800	15,000	220°	1/6	4.33"	60
⊛	11W	Medium	84971	A19FR11/827/OMNI3/LED	120	2700K	82	1100	15,000	220°	1/6	4.33"	75
⊛	11W	Medium	84972	A19FR11/830/OMNI3/LED	120	3000K	82	1100	15,000	220°	1/6	4.33"	75
<b>A21</b>													
⊛	16W	Medium	84973	A21FR16/827/OMNI3/LED	120	2700K	82	1600	15,000	220°	1/6	5.09"	100
⊛	16W	Medium	84974	A21FR16/830/OMNI3/LED	120	3000K	82	1600	15,000	220°	1/6	5.09"	100
⊛	16W	Medium	84975	A21FR16/840/OMNI3/LED	120	4000K	82	1600	15,000	220°	1/6	5.09"	100
⊛	16W	Medium	84976	A21FR16/850/OMNI3/LED	120	5000K	82	1600	15,000	220°	1/6	5.09"	100
<b>3-Way</b>													
⊛	3/9/12	Medium	83191	A19FR3/9/12/830/3-WAY/LED	120	3000K	82	280/950/1200	15,000	220°	1/6	4.646	30/70/100

\* Not rated for enclosed fixtures.

\* Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to burn past this point, but at decreased light levels.

Warranty – Commercial / Industrial: This product is warranted for 3 years from the date of purchase.

May not be compatible with all dimming systems, dimming performance may vary by system, please check the website [www.halcolighting.com/ProLEDdim](http://www.halcolighting.com/ProLEDdim) for up-to-date dimmer compatibility information. Use on incompatible systems may shorten lamp life. 25,000 hour useful life rating is based on a maximum ambient temperature of 45°C. Exceeding this ambient temperature rating may result in reduced life.