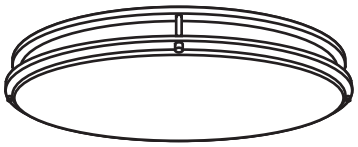

OVAL Flush Mount -- Installation Instructions

For Halco Product Codes:
FM-OV32-CS-BN-120V

Halco LIGHTING TECHNOLOGIES ®

TOOLS REQUIRED

Wire Cutters

Electrical Tape



Wire Strippers



Screwdriver

⚠ WARNINGS ⚠

- Risk of electric shock - Disconnect power at the source before installation.
- If you are unsure about the installation or the maintenance of the wall light, please consult an electrician.
- Do not make or alter any holes in the wiring enclosure or modify any electrical componentry.

CAUTIONS

- To insure personal safety, proper grounding of the electrical fixture is required.
- The fixture must be wired in accordance with the National Electric Code and applicable local codes or ordinances.

INSTALLATION INSTRUCTIONS

KEEP THIS INSTRUCTON FOR FUTURE USE AND READ CAREFULLY BEFORE INSTALLATION AND/OR MAINTAINANCE.

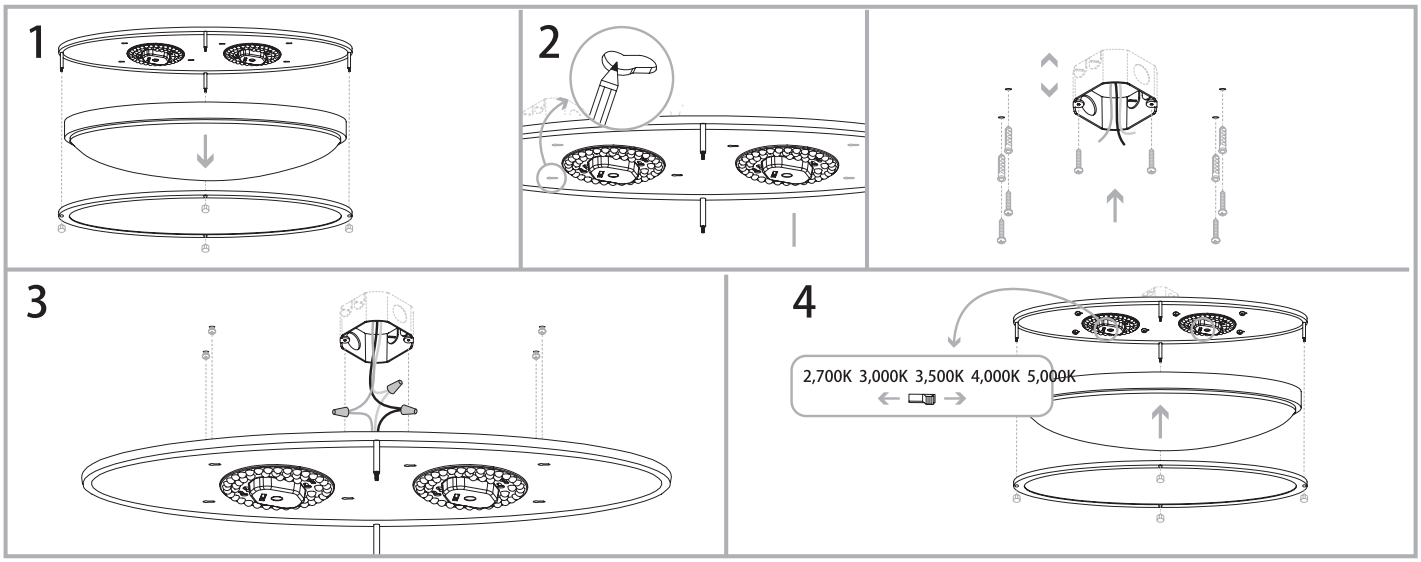

INSTALLATION STEPS FMOV:

1. Unscrew cap nuts counter-clockwise and remove the metal ring and the lens.
2. Attach the back plate to the outlet box and mark the location of the holes for the anchors. Remove the back plate and drill four appropriate sized holes for anchors, insert anchors into the holes, twist the four self-tapping screws into the anchors and two fixture screws into the outlet box.
3. Connect the wires: Black to Black, White to White, Ground to Ground. Attach the back plate to the ceiling by feeding self-tapping screws and fixture screws through the keyhole slots and then tighten them in the narrow end of the keyhole slots.
4. Choose either 2,700K, 3,000K, 3,500K 4,000K or 5,000K with simple switches on both LED drivers. The fixture is set to 3000K by default. Secure the lens and metal ring to the fixture pan using cap nuts.

HARDWARE INCLUDED:

Description	Q-ty
Template (A)	1
Screw (B)	4
Self-taping Screw (C)	4
Wire nut (D)	3
Anchor (E)	4

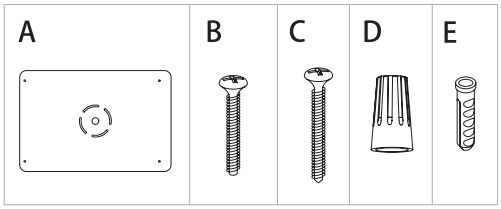

Halco Lighting Technologies | 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612 | Fax 800.880.0822 | halcolighting.com | Atlanta | Cleveland | Houston | Phoenix

© 2025 Halco Lighting Technologies, LLC. All rights reserved. Halco is registered trademark of Halco Lighting Technologies. All sizes and specifications are subject to change.